SIEMENS

Data sheet

3RT2028-1AP04

CONTACTOR, AC-3, 18.5KW/400V, 2NO+2NC, AC 230V 50HZ, 3-POLE, SZ S0 SCREW TERMINAL REMOVABLE AUX. SWITCH



product brandname	SIRIUS
Product designation	Power contactor
Product type designation	3RT2
General technical data	
Size of contactor	SO
Product extension	
 function module for communication 	No
Auxiliary switch	No
Insulation voltage	
 rated value 	690 V
Degree of pollution	3
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
 between coil and main contacts acc. to EN 	400 V
60947-1	
Protection class IP	
• on the front	IP20
• of the terminal	IP20
Shock resistance at rectangular impulse	

• at AC	8,3g / 5 ms, 5,3g / 10 ms
Shock resistance with sine pulse	
• at AC	13,5g / 5 ms, 8,3g / 10 ms
Mechanical service life (switching cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronics- compatible auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch 	10 000 000
block typical	
Ambient conditions	
Ambient temperature	
 during operation 	-25 +60 °C
 during storage 	-55 +80 °C
Main circuit	
Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Operating voltage	
 at AC-3 rated value maximum 	690 V
Operating current	
• at AC-1 at 400 V	
— at ambient temperature 40 °C rated value	50 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	50 A
— up to 690 V at ambient temperature 60 °C rated value	42 A
• at AC-2 at 400 V rated value	38 A
• at AC-3	
— at 400 V rated value	38 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	10 mm ²
• at 40 °C minimum permissible	10 mm ²
Operating current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	12 A
• at 690 V rated value	12 A
Operating current	
• at 1 current path at DC-1	
— at 24 V rated value	35 A

— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
 with 3 current paths in series at DC-1 	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	35 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	20 A
— at 110 V rated value	2.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.09 A
— at 600 V rated value	0.06 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	35 A
— at 110 V rated value	15 A
— at 220 V rated value	3 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
• with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	10 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
Operating power	
• at AC-1	
— at 230 V rated value	16 kW
— at 230 V at 60 °C rated value	15.5 kW
— at 400 V rated value	28 kW
— at 400 V at 60 °C rated value	27.5 kW

— at 690 V rated value	48 kW
— at 690 V at 60 °C rated value	47.5 kW
• at AC-2 at 400 V rated value	18.5 kW
● at AC-3	
— at 230 V rated value	11 kW
— at 400 V rated value	18.5 kW
— at 690 V rated value	18.5 kW
Operating power for approx. 200000 operating cycles	
at AC-4	
• at 400 V rated value	6 kW
• at 690 V rated value	10.3 kW
Thermal short-time current limited to 10 s	304 A
Power loss [W] at AC-3 at 400 V for rated value of	3.8 W
the operating current per conductor	
No-load switching frequency	
• at AC	5 000 1/h
Operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
● at AC-4 maximum	250 1/h
Control circuit/ Control	
	AC
Control circuit/ Control	
Control circuit/ Control Type of voltage of the control supply voltage	
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated	AC
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC	AC 230 V
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz	AC
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC	AC 230 V 0.8 1.1
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz	AC 230 V
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil	AC 230 V 0.8 1.1 77 V·A
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz	AC 230 V 0.8 1.1
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC	AC 230 V 0.8 1.1 77 V·A 0.82
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz	AC 230 V 0.8 1.1 77 V·A
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Inductive power factor with the holding power of the	AC 230 V 0.8 1.1 77 V·A 0.82
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz Inductive power factor with the holding power of the coil at 50 Hz	AC 230 V 0.8 1.1 77 V·A 0.82 9.8 V·A
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz	AC 230 V 0.8 1.1 77 V·A 0.82
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz	AC 230 V 0.8 1.1 77 V·A 0.82 9.8 V·A 0.25
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz	AC 230 V 0.8 1.1 77 V·A 0.82 9.8 V·A
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Closing delay • at AC Opening delay	AC 230 V 0.8 1.1 77 V·A 0.82 9.8 V·A 0.25 8 40 ms
Control circuit/ Control Type of voltage of the control supply voltage Control supply voltage at AC • at 50 Hz rated value Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz Apparent pick-up power of magnet coil at AC • at 50 Hz Inductive power factor with closing power of the coil • at 50 Hz Apparent holding power of magnet coil at AC • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz Inductive power factor with the holding power of the coil • at 50 Hz	AC 230 V 0.8 1.1 77 V·A 0.82 9.8 V·A 0.25


Desidual surrant of the electronics for control with	_
Residual current of the electronics for control with signal <0>	
at AC at 230 V maximum permissible	7 mA
• at DC at 24 V maximum permissible	16 mA
·	
Auxiliary circuit	_
Number of NC contacts	
for auxiliary contacts	
— instantaneous contact	2
Number of NO contacts	
 for auxiliary contacts 	
— instantaneous contact	2
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
Operating current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
• at 600 V rated value	0.15 A
Operating current at DC-13	
• at 24 V rated value	6 A
• at 48 V rated value	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
at 480 V rated value	34 A
at 600 V rated value	27 A
Yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	3 hp

	C ha
— at 230 V rated value	5 hp
 for three-phase AC motor 	
— at 200/208 V rated value	10 hp
— at 220/230 V rated value	10 hp
— at 460/480 V rated value	25 hp
— at 575/600 V rated value	25 hp
Contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
Design of the fuse link	
 for short-circuit protection of the main circuit 	
— with type of coordination 1 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A
 — with type of assignment 2 required 	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A
• for short-circuit protection of the auxiliary switch	fuse gG: 10 A
required	
Installation/ mounting/ dimensions	
Mounting position	+/-180° rotation possible on vertical mounting surface; can be
	tilted forward and backward by +/- 22.5° on vertical mounting
	surface
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
	according to DIN EN 60715
Side-by-side mounting	Yes
Height Width	85 mm 45 mm
	45 mm 141 mm
Depth Beguired encoding	141 11111
Required spacing	
• for grounded parts	C
— at the side	6 mm
for live parts	
— at the side	6 mm
Connections/Terminals	
Type of electrical connection	
 for main current circuit 	screw-type terminals
 for auxiliary and control current circuit 	screw-type terminals
Type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1 2.5 mm²), 2x (2.5 10 mm²)
— single or multi-stranded	2x (1 2,5 mm²), 2x (2,5 10 mm²)
— finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
 at AWG conductors for main contacts 	2x (16 12), 2x (14 8)
Type of connectable conductor cross-sections	
 for auxiliary contacts 	

— single or multi-stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 at AWG conductors for auxiliary contacts 	2x (20 16), 2x (18 14)

Safety related data	
B10 value	
 with high demand rate acc. to SN 31920 	1 000 000
Proportion of dangerous failures	
 with low demand rate acc. to SN 31920 	40 %
 with high demand rate acc. to SN 31920 	73 %
Failure rate [FIT]	
• with low demand rate acc. to SN 31920	100 FIT
Product function	
 Mirror contact acc. to IEC 60947-4-1 	Yes
 positively driven operation acc. to IEC 60947-5- 1 	No
T1 value for proof test interval or service life acc. to IEC 61508	20 у
Protection against electrical shock	finger-safe
Certificates/annrovals	

Certificates/approvals

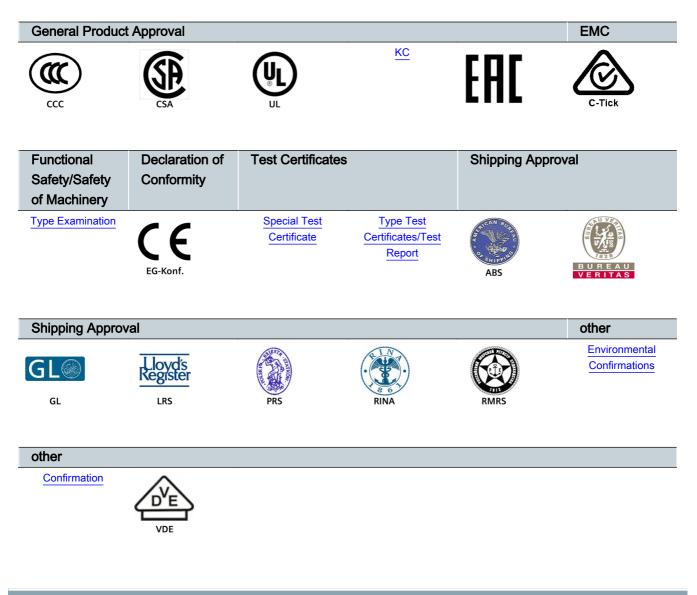

Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2028-1AP04


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2028-1AP04


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT2028-1AP04


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2028-1AP04&lang=en



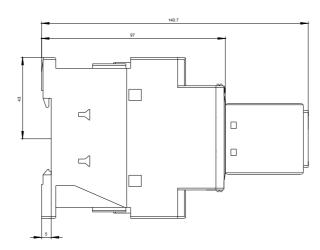



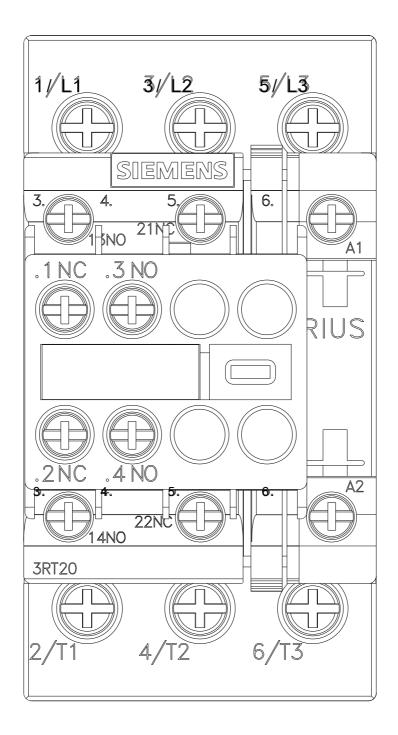

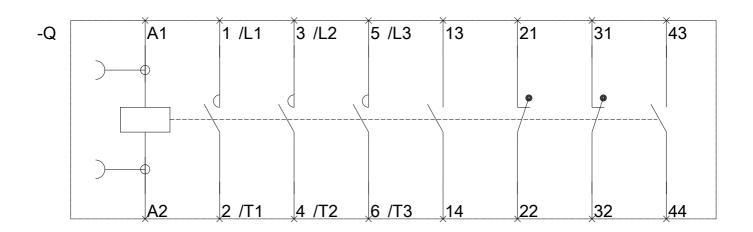

last modified:

06/19/2017