


Panel Connector, Single Hole Mounted, Rear Mounting 7.458.000.000

characteristic of connection	Crimp Solder dip-solder (PCB)
Contact material	Copper-Zinc alloy
Contact surface	Nickel plated, Gold plated (0,25µm) Nickel
for cables mm	3 – 17 mm
Housing material	Copper-Zinc alloy Die Casting
Housing surface	other surface upon request Nickel plated brass
Inserts	PBT Fire protection class V-0 Thermoplastic Polyamid PA 6 (Nylon 6/6)
Male thread	M 25 x 1,5
Operating-Temperature	-40 – 125 °C
Protection	IP 67 / IP 69 K per EN 60 629 (connected)
Seal ring	Buna-N standard Viton (FPM)
Type	Thread M 25 x 1,5



Certificates

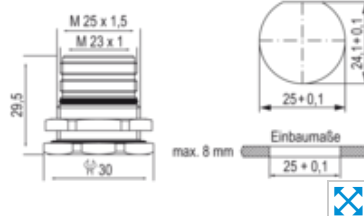

EAC

