

TWO-HAND OPERATION CONSOLE FOR COMMAND DEVICES, 22MM, ROUND, ENCLOSURE MATERIAL METAL, ENCLOSURE TOP PART GRAY, 3 COMMAND POINTS METAL, 4 ADDITIONAL DRILL HOLES FOR 22 MM COMMAND DEVICES 2 MUSHROOM PUSHB. BLACK 40MM, 2 X 1NO+1NC, SCREW TERMINAL, 1 EMERG. STOP, 40MM, 2NC, SCREW TERMINAL, FRONT MOUNTING, WITH CABLE BUSHINGS FOR METRIC CABLE GLANDS



Figure similar

product brand name	SIRIUS ACT
Product designation	Commanding and signaling devices
Design of the product	Enclosure
Manufacturer article number	<ul style="list-style-type: none"> • of supplied contact module at the command point A 1 3SU1400-1AA10-1CA0 • of supplied contact module at the command point A 3 3SU1400-1AA10-1BA0 • of supplied contact module at the command point B 1 3SU1400-1AA10-1CA0 • of supplied contact module at the command point B 3 3SU1400-1AA10-1CA0 • of supplied contact module at the command point C 1 3SU1400-1AA10-1CA0 • of supplied contact module at the command point C 3 3SU1400-1AA10-1BA0 • of the supplied holder at the command point A 3SU1550-0AA10-0AA0 • of the supplied holder at the command point B 3SU1550-0AA10-0AA0 • of the supplied holder at the command point C 3SU1550-0AA10-0AA0

- of the supplied actuator at the command point A
- of the supplied actuator at the command point B
- of the supplied actuator at the command point C
- of supplied empty enclosure
- of the supplied accessories at the command point B

[3SU1050-1BD10-0AA0](#)

[3SU1050-1HB20-0AA0](#)

[3SU1050-1BD10-0AA0](#)

[3SU1853-3AA00-0AA1](#)

[3SU1900-0BB31-0AT0](#)

Enclosure:

Design of the housing	Two-hand operating console with standard components
Material of the enclosure	metal
Number of command points	3
Color	
• of top part of the enclosure	grey
Delivery state	
• as a kit	No
• pre-wired on strip terminal	No
Mounting type of the enclosure	Horizontal

Actuator:

Manner of function of the actuating element	A = momentary contact / B = latching / C = momentary contact
Product feature	
• lockout	No
• staggered switching	No
Color	
• of the actuating element	A = black / B = red / C = black
Material of the actuating element	metal
Shape of the actuating element	round
Number of contact modules	6
Type of unlocking device	A = none / B = rotate to unlock / C = none

Front ring:

Product component front ring	Yes
Material of the front ring	metal
Color of the front ring	silver

Holder:

Material of the holder	Metal
-------------------------------	-------

General technical data:

Product function	
• positive opening	Yes
• EMERGENCY OFF function	Yes
• EMERGENCY STOP function	Yes

Product component	
• Stand/pedestal	No
Protection class IP	IP66
Degree of protection NEMA	NEMA 1 ,3, 3R, 4, 4X, 12, 13
Shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50 g / 11 ms
Vibration resistance	
• acc. to IEC 60068-2-6	10 ... 500 Hz: 5g
Equipment marking	
• acc. to DIN EN 61346-2	S
• acc. to DIN EN 81346-2	S

Auxiliary circuit:

Design of the contact of the auxiliary contacts	Silver alloy
Number of NC contacts	
• for auxiliary contacts	4
Number of NO contacts	
• for auxiliary contacts	2
Number of CO contacts	
• for auxiliary contacts	0

Connections/ Terminals:

Type of electrical connection on enclosure	Cable routing at the rear 2 x M25
---	-----------------------------------

Ambient conditions:

Ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C

Installation/ mounting/ dimensions:

Mounting type	
• of modules and accessories	Front plate mounting
Height	185.6 mm
Width	492.4 mm
Depth	159.5 mm

Accessories:

Number of backing plates	1
Marking of backing plate	EMERGENCY-STOP
Color of backing plate	Yellow




Certificates/ approvals:

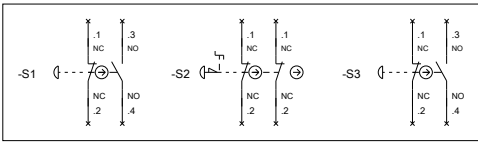


EG-Konf.

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3SU18533NB001AD1>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3SU18533NB001AD1>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3SU18533NB001AD1>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3SU18533NB001AD1&lang=en



SIEMENS

3SU18.3.NB0_01_4_IEC.DXF

last modified:

14.09.2015