

Thermistor motor protection relay Standard evaluation unit 22.5 mm enclosure Spring-type terminal 2 change-over contacts US = 24 V AC/DC Manul/Remote-Reset with ATEX approval 2 LEDs (READY/TRIPPED) galvanic isolation Test/reset button Wire break monitoring Short circuit monitoring



Figure similar

<b>Product brand name</b>	SIRIUS
<b>Product category</b>	SIRIUS 3RN2 thermistor motor protection
<b>Product designation</b>	Thermistor motor protection relay
<b>Product type designation</b>	3RN2

General technical data	
<b>Display version LED</b>	Yes
<b>Power loss [W] for rated value of the current</b>	
• at AC in hot operating state	1.7 W
• at DC in hot operating state	1.2 W
<b>Insulation voltage</b>	
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	300 V
<b>Degree of pollution</b>	3
<b>Surge voltage resistance rated value</b>	4 kV
<b>Protection class IP</b>	IP20
<b>Shock resistance</b>	

<ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-27</li> </ul>	11g / 15 ms
<b>Vibration resistance</b>	
<ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-6</li> </ul>	10 ... 55 Hz: 0.35 mm
<b>Mechanical service life (switching cycles)</b>	
<ul style="list-style-type: none"> <li>• typical</li> </ul>	10 000 000
<b>Electrical endurance (switching cycles)</b>	
<ul style="list-style-type: none"> <li>• at AC-15 at 230 V typical</li> </ul>	100 000
<b>Thermal current of the switching element with contacts maximum</b>	5 A
Certificate of suitability relating to ATEX	PTB 15 ATEX 3011
<b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b>	K
<b>Reference code</b>	
<ul style="list-style-type: none"> <li>• acc. to DIN EN 81346-2</li> </ul>	K
<ul style="list-style-type: none"> <li>• acc. to DIN EN 61346-2</li> </ul>	K

### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	AC/DC
<b>Control supply voltage at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>	24 ... 24 V
<ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>	24 ... 24 V
<b>Control supply voltage at DC</b>	
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	24 ... 24 V
<b>Operating range factor control supply voltage rated value at DC</b>	
<ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.85
<ul style="list-style-type: none"> <li>• Full-scale value</li> </ul>	1.1
<b>Operating range factor control supply voltage rated value at AC at 50 Hz</b>	
<ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.85
<ul style="list-style-type: none"> <li>• Full-scale value</li> </ul>	1.1
<b>Operating range factor control supply voltage rated value at AC at 60 Hz</b>	
<ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.85
<ul style="list-style-type: none"> <li>• Full-scale value</li> </ul>	1.1
<b>Inrush current peak</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> </ul>	0.5 A
<b>Duration of inrush current peak</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> </ul>	50 ms

### Measuring circuit

<b>Buffering time in the event of power failure minimum</b>	40 ms
---	-------

### Precision

<b>Relative metering precision</b>	2 %
------------------------------------	-----

Auxiliary circuit	
Material of switching contacts	AgSnO <sub>2</sub>
Number of NC contacts	0
<ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>	0
Number of NO contacts	0
<ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>	0
Number of CO contacts	2
<ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>	2
Operating current of auxiliary contacts at DC-13	
<ul style="list-style-type: none"> <li>at 24 V</li> <li>at 125 V</li> <li>at 250 V</li> </ul>	1 A 0.2 A 0.1 A
Main circuit	
Operating frequency rated value	50 ... 60 Hz
Outputs	
Ampacity of the output relay at AC-15	
<ul style="list-style-type: none"> <li>at 250 V at 50/60 Hz</li> </ul>	3 A
Ampacity of the output relay at DC-13	
<ul style="list-style-type: none"> <li>at 24 V</li> <li>at 125 V</li> </ul>	1 A 0.2 A
Continuous current of the DIAZED fuse link of the output relay	6 A
Electromagnetic compatibility	
Conducted interference	
<ul style="list-style-type: none"> <li>due to burst acc. to IEC 61000-4-4</li> <li>due to conductor-earth surge acc. to IEC 61000-4-5</li> <li>due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line)
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Galvanic isolation	
Design of the electrical isolation	galvanic
Galvanic isolation	
<ul style="list-style-type: none"> <li>between entrance and outlet</li> <li>between the outputs</li> <li>between the voltage supply and other circuits</li> </ul>	Yes Yes No
Safety related data	
Safety Integrity Level (SIL) acc. to IEC 61508	1
Performance level (PL) acc. to EN ISO 13849-1	c
Category acc. to EN ISO 13849-1	1
Safe failure fraction (SFF)	74 %

<b>Average diagnostic coverage level (DCavg)</b>	18 %
<b>Failure rate [FIT]</b>	
• at rate of recognizable hazardous failures ( $\lambda_{dd}$ )	0.000000068 1/h
• at rate of non-recognizable hazardous failures ( $\lambda_{du}$ )	0.00000031 1/h
<b>PFHD with high demand rate acc. to EN 62061</b>	0.00000038 1/h
<b>PFDavg with low demand rate acc. to IEC 61508</b>	0.0041
<b>MTBF</b>	97 y
<b>MTTFd</b>	303 y
<b>Hardware fault tolerance acc. to IEC 61508</b>	0
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	3 y

### Connections/Terminals

<b>Product function</b>	
• removable terminal for auxiliary and control circuit	Yes
<b>Type of electrical connection</b>	Push-in terminal
<b>Type of connectable conductor cross-sections</b>	
• solid	0.5 ... 4 mm <sup>2</sup>
• finely stranded with core end processing	0.5 ... 2.5 mm <sup>2</sup>
• finely stranded without core end processing	0.5 ... 4 mm <sup>2</sup>
• at AWG conductors solid	20 ... 12
• at AWG conductors stranded	20 ... 12
<b>Connectable conductor cross-section</b>	
• solid	0.5 ... 4 mm <sup>2</sup>
• finely stranded with core end processing	0.5 ... 2.5 mm <sup>2</sup>
• finely stranded without core end processing	0.5 ... 4 mm <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b>	
• solid	20 ... 12
• stranded	20 ... 12

### Installation/ mounting/ dimensions

<b>Mounting position</b>	any
<b>Mounting type</b>	screw and snap-on mounting onto 35 mm standard mounting rail
<b>Height</b>	100 mm
<b>Width</b>	22.5 mm
<b>Depth</b>	90 mm
<b>Required spacing</b>	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm

— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	0 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm

### Ambient conditions

<b>Installation altitude at height above sea level</b>	
• maximum	2 000 m
<b>Ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
<b>Relative humidity</b>	
• during operation	70 %
<b>Explosion protection category for dust</b>	[Ex t] [Ex p]

### Certificates/approvals

<b>General Product Approval</b>	<b>EMC</b>	<b>For use in hazardous locations</b>
---------------------------------	------------	---------------------------------------



<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>Marine / Shipping</b>	<b>other</b>
----------------------------------	--------------------------	--------------------------	--------------



[Type Test Certificates/Test Report](#)



[Confirmation](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RN2011-2BA30>

### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RN2011-2BA30>


### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RN2011-2BA30>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RN2011-2BA30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RN2011-2BA30&lang=en)

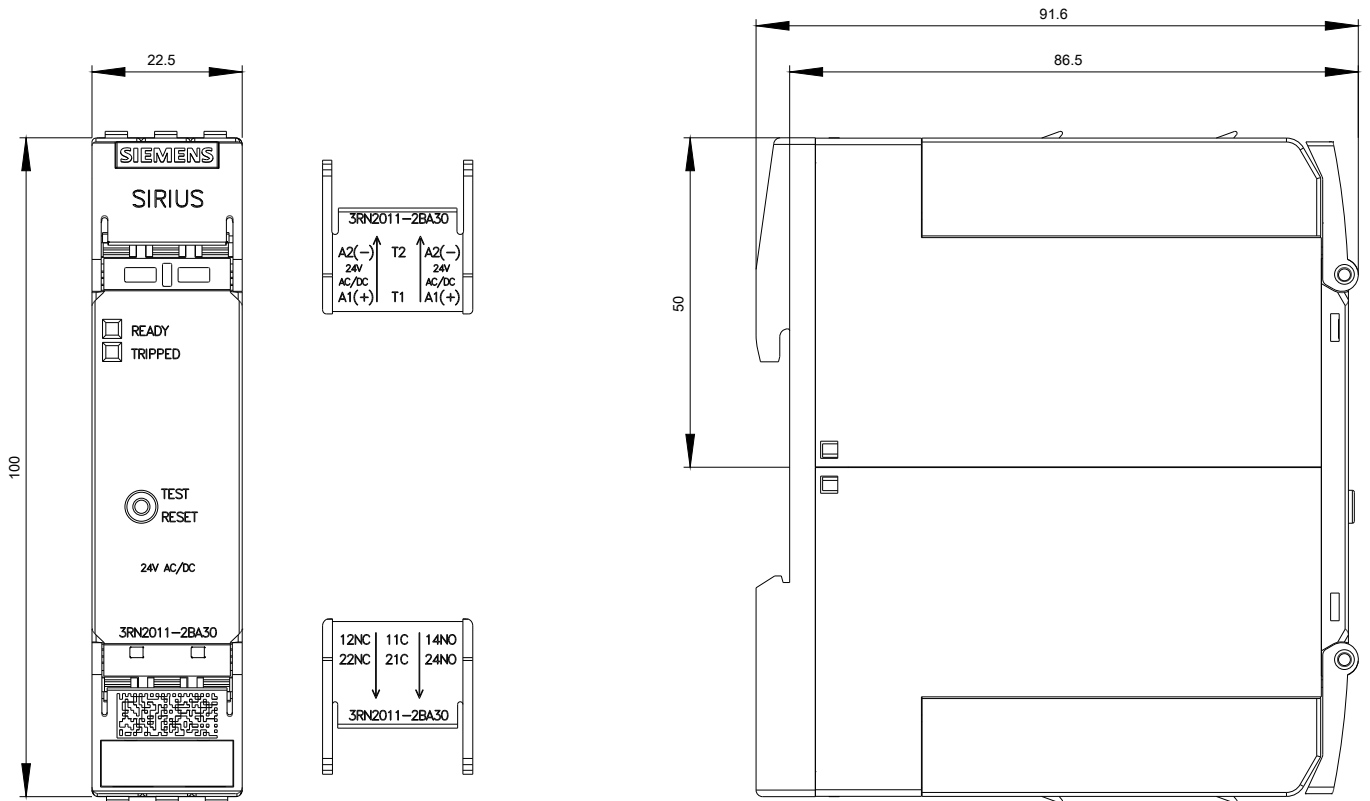

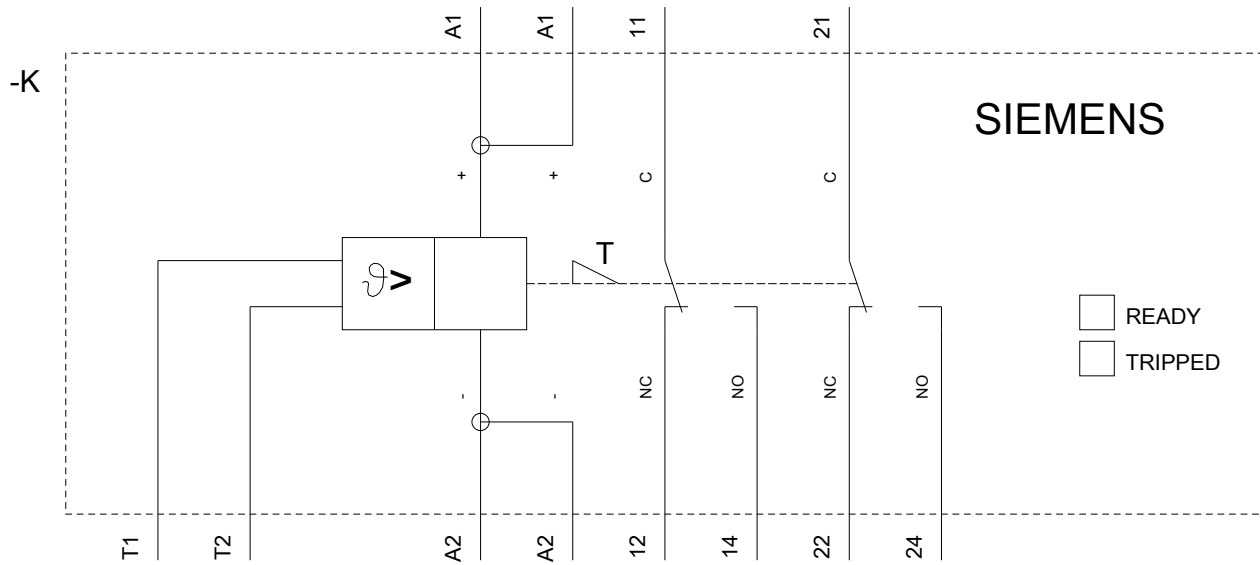

last modified:

04/10/2018