

SIRIUS Compact load feeder Reversing starter 400 V 24 V AC/DC
 50...60 Hz 8...32 A IP20 Connection main circuit: plug-in, without
 terminals Connection control circuit: Spring-type terminal



| | |
|--------------------------|-------------------|
| Product brand name | SIRIUS |
| Product designation | compact starter |
| Design of the product | reversing starter |
| Product type designation | 3RA62 |

| General technical data | |
|---|---------|
| Product function | |
| • Control circuit interface to parallel wiring | Yes |
| Product extension | |
| • Auxiliary switch | Yes |
| Power loss [W] for rated value of the current | |
| • at AC in hot operating state | 5.4 W |
| • at AC in hot operating state per pole | 1.8 W |
| Power loss [W] for rated value of the current without load current share typical | 3.5 W |
| Insulation voltage | |
| • rated value | 690 V |
| Degree of pollution | 3 |
| Surge voltage resistance rated value | 6 000 V |
| maximum permissible voltage for safe isolation | |

| | |
|--|--|
| <ul style="list-style-type: none"> • between main and auxiliary circuit • between auxiliary and auxiliary circuit • between control and auxiliary circuit | <p>400 V</p> <p>250 V</p> <p>300 V</p> |
| Protection class IP | IP20 |
| Shock resistance | a=60 m/s ² (6g) with 10 ms per 3 shocks in all axes |
| Vibration resistance | f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s ² ; 10 cycles |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> • of the main contacts typical • of auxiliary contacts typical • of the signaling contacts typical | <p>10 000 000</p> <p>10 000 000</p> <p>10 000 000</p> |
| Electrical endurance (switching cycles) of auxiliary contacts | |
| <ul style="list-style-type: none"> • at DC-13 at 6 A at 24 V typical • at AC-15 at 6 A at 230 V typical | <p>30 000</p> <p>200 000</p> |
| Type of assignment | continous operation according to IEC 60947-6-2 |
| Reference code acc. to DIN EN 81346-2 | Q |
| Reference code acc. to DIN EN 61346-2 | Q |

Ambient conditions

| | |
|--|---|
| Installation altitude at height above sea level | |
| <ul style="list-style-type: none"> • maximum | 2 000 m |
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage • during transport | <p>-20 ... +60 °C</p> <p>-55 ... +80 °C</p> <p>-55 ... +80 °C</p> |
| Relative humidity during operation | 10 ... 90 % |

Main circuit

| | |
|--|-------------------------|
| Number of poles for main current circuit | 3 |
| Adjustable pick-up value current of the current-dependent overload release | 8 ... 32 A |
| Formula for making capacity limit current | 12 x I _e |
| Formula for interruption capacity limit current | 10 x I _e |
| Mechanical power output for 4-pole AC motor | |
| <ul style="list-style-type: none"> • at 400 V rated value | 15 kW |
| Operating voltage | |
| <ul style="list-style-type: none"> • at AC-3 rated value maximum | 400 V |
| Operating current | |
| <ul style="list-style-type: none"> • at AC at 400 V rated value • at AC-43 <ul style="list-style-type: none"> — at 400 V rated value | <p>32 A</p> <p>29 A</p> |
| Operating power | |
| <ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value | 15 kW |

| | |
|--|--------------------|
| <ul style="list-style-type: none"> • at AC-43 — at 400 V rated value | 15 000 W |
| No-load switching frequency | 3 600 1/h |
| Operating frequency | |
| <ul style="list-style-type: none"> • at AC-41 acc. to IEC 60947-6-2 maximum • at AC-43 acc. to IEC 60947-6-2 maximum | 750 1/h 250 1/h |

Control circuit/ Control

| | |
|--|----------------|
| Type of voltage | AC/DC |
| Control supply voltage 1 at AC | |
| <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value | 24 V 24 V |
| Control supply voltage frequency | |
| <ul style="list-style-type: none"> • 1 rated value • 2 rated value | 50 Hz 60 Hz |
| Control supply voltage 1 | |
| <ul style="list-style-type: none"> • at DC rated value | 24 V |
| Holding power | |
| <ul style="list-style-type: none"> • at AC maximum • at DC maximum | 3.5 W 3.1 W |

Auxiliary circuit

| | |
|---|--------|
| Number of NC contacts for auxiliary contacts | 0 |
| Number of NO contacts for auxiliary contacts | 2 |
| Number of NO contacts | |
| <ul style="list-style-type: none"> • of instantaneous short-circuit trip unit for signaling contact | 1 |
| Number of CO contacts | |
| <ul style="list-style-type: none"> • of the current-dependent overload release for signaling contact | 1 |
| Operating current of auxiliary contacts at AC-12 maximum | 10 A |
| Operating current of auxiliary contacts at DC-13 | |
| <ul style="list-style-type: none"> • at 250 V | 0.27 A |

Protective and monitoring functions

| | |
|--|----------------------------|
| Trip class | CLASS 10 and 20 adjustable |
| Operational short-circuit current breaking capacity (Ics) | |
| <ul style="list-style-type: none"> • at 400 V | 53 kA |

UL/CSA ratings

| | |
|--|------|
| Full-load current (FLA) for three-phase AC motor | |
| <ul style="list-style-type: none"> • at 480 V rated value | 32 A |
| Yielded mechanical performance [hp] | |

| | |
|--|---|
| <ul style="list-style-type: none"> • for three-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value | <p>7.5 hp</p> <p>10 hp</p> <p>20 hp</p> |
| Contact rating of auxiliary contacts according to UL | contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300 |

| Short-circuit protection | |
|--|------------------|
| Product function Short circuit protection | Yes |
| Design of short-circuit protection | electromagnetic |
| Design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required | fuse gL/gG: 10 A |
| <ul style="list-style-type: none"> • for short-circuit protection of the signaling switch of the short-circuit release required | 6A gL/gG/400V |
| <ul style="list-style-type: none"> • for short-circuit protection of the signaling switch of the overload release required | 4A gL/gG/400V |

| Installation/ mounting/ dimensions | |
|---|--|
| Mounting position | any |
| <ul style="list-style-type: none"> • recommended | vertical, on horizontal standard mounting rail |
| Mounting type | screw and snap-on mounting |
| Height | 191 mm |
| Width | 90 mm |
| Depth | 165 mm |

| Connections/ Terminals | |
|---|--|
| Product function | |
| <ul style="list-style-type: none"> • removable terminal for main circuit | Yes |
| <ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit | Yes |
| Type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit | plug-in without terminals |
| <ul style="list-style-type: none"> • for auxiliary and control current circuit | spring-loaded terminals |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing — finely stranded without core end processing | <p>2x (2.5 ... 6 mm²), 1x 10 mm²</p> <p>2x (2.5 ... 6 mm²)</p> <p>2x (2.5 ... 6 mm²)</p> |
| <ul style="list-style-type: none"> • at AWG conductors for main contacts | 2x (14 ... 10), 1x 8 |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing | <p>2x (0.25 ... 1.5 mm²)</p> <p>2x (0.25 ... 1.5 mm²)</p> |

| | |
|---|------------------------------------|
| — finely stranded without core end processing | 2x (0.25 ... 1.5 mm ²) |
| • at AWG conductors for auxiliary contacts | 2x (24 ... 16) |

Safety related data

| | |
|---|-----------|
| B10 value | |
| • with high demand rate acc. to SN 31920 | 2 000 000 |
| Proportion of dangerous failures | |
| • with low demand rate acc. to SN 31920 | 40 % |
| • with high demand rate acc. to SN 31920 | 50 % |
| Failure rate [FIT] | |
| • with low demand rate acc. to SN 31920 | 100 FIT |
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y |

Communication/ Protocol

| | |
|---|----|
| Product function Bus communication | No |
| Protocol is supported | |
| • IO-Link protocol | No |
| Product function Control circuit interface with IO link | No |

Electromagnetic compatibility

| | |
|---|---|
| Conducted interference | |
| • due to burst acc. to IEC 61000-4-4 | 4 kV main contacts, 2 kV auxiliary contacts |
| • due to conductor-earth surge acc. to IEC 61000-4-5 | 4 kV main contacts, 2 kV auxiliary contacts |
| • due to conductor-conductor surge acc. to IEC 61000-4-5 | 2 kV main contacts, 1 kV auxiliary contacts |
| • due to high-frequency radiation acc. to IEC 61000-4-6 | 0.15-80MHz at 10V |
| Field-bound parasitic coupling acc. to IEC 61000-4-3 | 10 V/m |
| Electrostatic discharge acc. to IEC 61000-4-2 | 8 kV |
| Conducted HF-interference emissions acc. to CISPR11 | 150 kHz ... 30 MHz Class A |
| Field-bound HF-interference emission acc. to CISPR11 | 30 ... 1000 MHz Class A |

Supply voltage

| | |
|--|----|
| Supply voltage required Auxiliary voltage | No |
|--|----|

Certificates/ approvals

| | | |
|--------------------------|-----|---------------------------------------|
| General Product Approval | EMC | Functional Safety/Safety of Machinery |
|--------------------------|-----|---------------------------------------|



| | | |
|---------------------------|-------------------|-------------------|
| Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------|-------------------|-------------------|



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



| | |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/ic10

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6250-2EB33>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6250-2EB33>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6250-2EB33>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6250-2EB33&lang=en


Characteristic: Tripping characteristics, I^t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6250-2EB33/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA6250-2EB33&objecttype=14&gridview=view1>

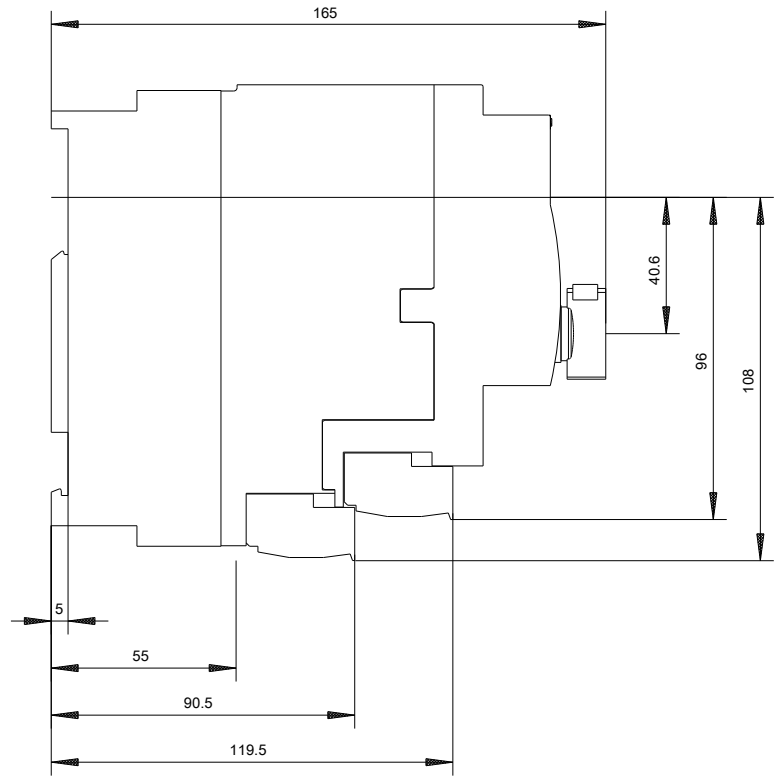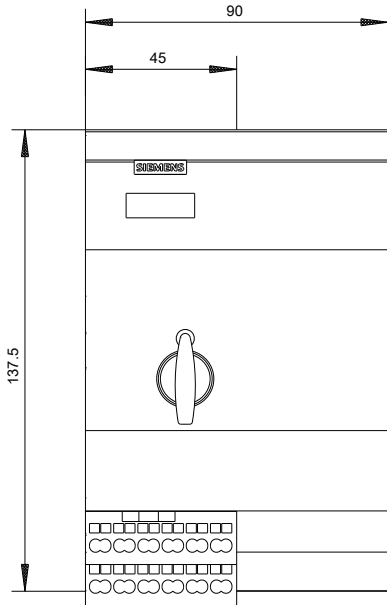

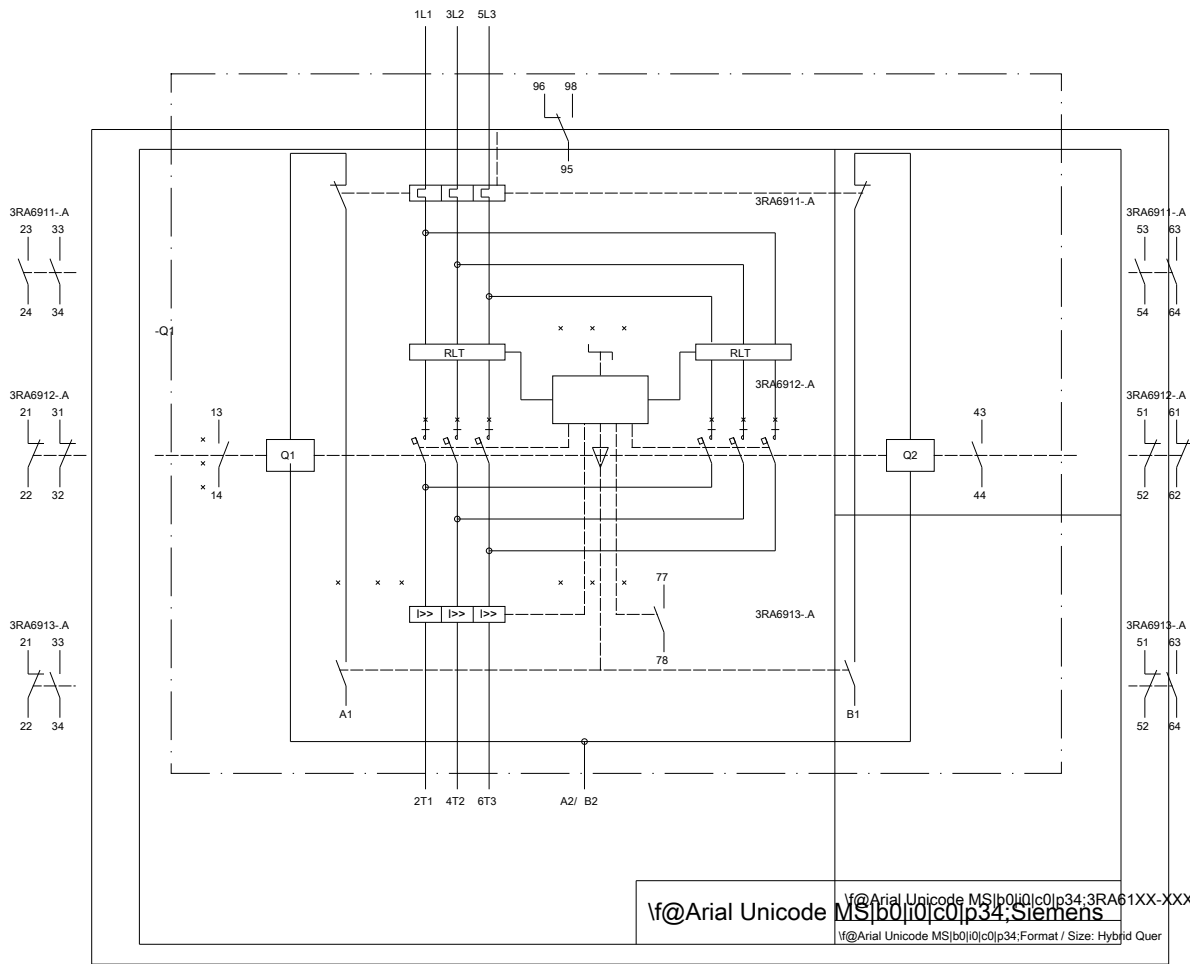

© Siemens AG 2019. All rights reserved. 3RA61XX-XXXXX_01_4_IEC

last modified:

01/16/2020