

power contactor, AC-3 17 A, 7.5 kW / 400 V 1 NO + 1 NC, 24 V DC with integrated varistor 3-pole, Size S0, Spring-type terminal suitable for PLC outputs



|                          |                |
|--------------------------|----------------|
| Product brand name       | SIRIUS         |
| Product designation      | Coupling relay |
| Product type designation | 3RT2           |

| General technical data  |       |
|---|-------|
| Size of contactor   | S0    |
| Product extension   |       |
| <ul style="list-style-type: none"> <li>function module for communication</li> </ul>                 | No    |
| <ul style="list-style-type: none"> <li>Auxiliary switch</li> </ul>                                  | No    |
| Power loss [W] for rated value of the current   |       |
| <ul style="list-style-type: none"> <li>at AC in hot operating state</li> </ul>                      | 2.7 W |
| <ul style="list-style-type: none"> <li>at AC in hot operating state per pole</li> </ul>             | 0.9 W |
| Power loss [W] for rated value of the current without load current share typical                    | 4.5 W |
| Surge voltage resistance  |       |
| <ul style="list-style-type: none"> <li>of main circuit rated value</li> </ul>                       | 6 kV  |
| <ul style="list-style-type: none"> <li>of auxiliary circuit rated value</li> </ul>                  | 6 kV  |
| maximum permissible voltage for safe isolation  |       |
| <ul style="list-style-type: none"> <li>between coil and main contacts acc. to EN 60947-1</li> </ul> | 400 V |

|   |                          |
|---|--------------------------|
| <b>Protection class IP</b>  |                          |
| • on the front  | IP20                     |
| • of the terminal   | IP20                     |
| <b>Shock resistance at rectangular impulse</b>  |                          |
| • at DC   | 10g / 5 ms, 7,5g / 10 ms |
| <b>Shock resistance with sine pulse</b>   |                          |
| • at DC   | 15g / 5 ms, 10g / 10 ms  |
| <b>Mechanical service life (switching cycles)</b>                                       |                          |
| • of contactor typical  | 10 000 000               |
| • of the contactor with added electronics-compatible auxiliary switch block typical     | 5 000 000                |
| • of the contactor with added auxiliary switch block typical                            | 10 000 000               |
| <b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b> | K                        |
| <b>Reference code acc. to DIN EN 81346-2</b>  | Q                        |

### Ambient conditions

|  |                |
|--|----------------|
| <b>Installation altitude at height above sea level</b> |                |
| • maximum  | 2 000 m        |
| <b>Ambient temperature</b>                             |                |
| • during operation                                     | -25 ... +60 °C |
| • during storage                                       | -55 ... +80 °C |

### Main circuit

|  |        |
|--|--------|
| <b>Number of poles for main current circuit</b>        | 3      |
| <b>Number of NO contacts for main contacts</b>         | 3      |
| <b>Operating voltage</b>                               |        |
| • at AC-3 rated value maximum                          | 690 V  |
| <b>Operating current</b>                               |        |
| • at AC-1 at 400 V                                     |        |
| — at ambient temperature 40 °C rated value             | 40 A   |
| • at AC-1  |        |
| — up to 690 V at ambient temperature 40 °C rated value | 40 A   |
| — up to 690 V at ambient temperature 60 °C rated value | 35 A   |
| • at AC-2 at 400 V rated value                         | 17 A   |
| • at AC-3  |        |
| — at 400 V rated value                                 | 17 A   |
| — at 500 V rated value                                 | 17 A   |
| — at 690 V rated value                                 | 13 A   |
| • at AC-4 at 400 V rated value                         | 15.5 A |
| • at AC-5a up to 690 V rated value                     | 35.2 A |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• at AC-5b up to 400 V rated value</li> </ul>   | 14.1 A  |
| <ul style="list-style-type: none"> <li>• at AC-6a <ul style="list-style-type: none"> <li>— up to 230 V for current peak value n=20 rated value</li> <li>— up to 400 V for current peak value n=20 rated value</li> <li>— up to 500 V for current peak value n=20 rated value</li> <li>— up to 690 V for current peak value n=20 rated value</li> </ul> </li> </ul>   | 11.4 A<br>11.4 A<br>11.4 A<br>11.3 A  |
| <ul style="list-style-type: none"> <li>• at AC-6a <ul style="list-style-type: none"> <li>— up to 230 V for current peak value n=30 rated value</li> <li>— up to 400 V for current peak value n=30 rated value</li> <li>— up to 500 V for current peak value n=30 rated value</li> <li>— up to 690 V for current peak value n=30 rated value</li> </ul> </li> </ul>   | 7.6 A<br>7.6 A<br>7.6 A<br>7.6 A  |
| <b>Minimum cross-section in main circuit</b>   |   |
| <ul style="list-style-type: none"> <li>• at maximum AC-1 rated value</li> </ul>  | 10 mm <sup>2</sup>  |
| <b>Operating current for approx. 200000 operating cycles at AC-4</b>   |   |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> <li>• at 690 V rated value</li> </ul>   | 7.7 A<br>7.7 A  |
| <b>Operating current</b>   |   |
| <ul style="list-style-type: none"> <li>• at 1 current path at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>• with 2 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>• with 3 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> </ul> | 35 A<br>4.5 A<br>1 A<br>0.4 A<br>0.25 A<br><br>35 A<br>35 A<br>5 A<br>1 A<br>0.8 A<br><br>35 A<br>35 A<br>35 A<br>2.9 A |

|  |           |
|--|-----------|
| — at 600 V rated value   | 1.4 A     |
| <b>Operating current</b>   |           |
| • at 1 current path at DC-3 at DC-5                                |           |
| — at 24 V rated value  | 20 A      |
| — at 110 V rated value   | 2.5 A     |
| — at 220 V rated value   | 1 A       |
| — at 440 V rated value   | 0.09 A    |
| — at 600 V rated value   | 0.06 A    |
| • with 2 current paths in series at DC-3 at DC-5                   |           |
| — at 24 V rated value  | 35 A      |
| — at 110 V rated value   | 15 A      |
| — at 220 V rated value   | 3 A       |
| — at 440 V rated value   | 0.27 A    |
| — at 600 V rated value   | 0.16 A    |
| • with 3 current paths in series at DC-3 at DC-5                   |           |
| — at 24 V rated value  | 35 A      |
| — at 110 V rated value   | 35 A      |
| — at 220 V rated value   | 10 A      |
| — at 440 V rated value   | 0.6 A     |
| — at 600 V rated value   | 0.6 A     |
| <b>Operating power</b>   |           |
| • at AC-1  |           |
| — at 230 V rated value   | 13.3 kW   |
| — at 230 V at 60 °C rated value                                    | 13.3 kW   |
| — at 400 V rated value   | 23 kW     |
| — at 400 V at 60 °C rated value                                    | 23 kW     |
| — at 690 V rated value   | 40 kW     |
| — at 690 V at 60 °C rated value                                    | 40 kW     |
| • at AC-2 at 400 V rated value                                     | 7.5 kW    |
| • at AC-3  |           |
| — at 230 V rated value   | 4 kW      |
| — at 400 V rated value   | 7.5 kW    |
| — at 500 V rated value   | 7.5 kW    |
| — at 690 V rated value   | 11 kW     |
| <b>Operating power for approx. 200000 operating cycles at AC-4</b> |           |
| • at 400 V rated value   | 3.5 kW    |
| • at 690 V rated value   | 6 kW      |
| <b>Operating apparent output at AC-6a</b>                          |           |
| • up to 230 V for current peak value n=20 rated value              | 4 500 V·A |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• up to 400 V for current peak value n=20 rated value</li> </ul> | 7 800 V·A   |
| <ul style="list-style-type: none"> <li>• up to 500 V for current peak value n=20 rated value</li> </ul> | 9 900 V·A   |
| <ul style="list-style-type: none"> <li>• up to 690 V for current peak value n=20 rated value</li> </ul> | 13 600 V·A  |
| <b>Operating apparent output at AC-6a</b>   |   |
| <ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=30 rated value</li> </ul> | 3 000 V·A   |
| <ul style="list-style-type: none"> <li>• up to 400 V for current peak value n=30 rated value</li> </ul> | 5 200 V·A   |
| <ul style="list-style-type: none"> <li>• up to 500 V for current peak value n=30 rated value</li> </ul> | 6 600 V·A   |
| <ul style="list-style-type: none"> <li>• up to 690 V for current peak value n=30 rated value</li> </ul> | 9 100 V·A   |
| <b>Short-time withstand current in cold operating state up to 40 °C</b>                                 |   |
| <ul style="list-style-type: none"> <li>• limited to 1 s switching at zero current maximum</li> </ul>    | 225 A; Use minimum cross-section acc. to AC-1 rated value |
| <ul style="list-style-type: none"> <li>• limited to 5 s switching at zero current maximum</li> </ul>    | 225 A; Use minimum cross-section acc. to AC-1 rated value |
| <ul style="list-style-type: none"> <li>• limited to 10 s switching at zero current maximum</li> </ul>   | 180 A; Use minimum cross-section acc. to AC-1 rated value |
| <ul style="list-style-type: none"> <li>• limited to 30 s switching at zero current maximum</li> </ul>   | 115 A; Use minimum cross-section acc. to AC-1 rated value |
| <ul style="list-style-type: none"> <li>• limited to 60 s switching at zero current maximum</li> </ul>   | 96 A; Use minimum cross-section acc. to AC-1 rated value  |
| <b>No-load switching frequency</b>  |   |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>   | 1 500 1/h   |
| <b>Operating frequency</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> </ul>                                     | 1 000 1/h   |
| <ul style="list-style-type: none"> <li>• at AC-2 maximum</li> </ul>                                     | 1 000 1/h   |
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> </ul>                                     | 1 000 1/h   |
| <ul style="list-style-type: none"> <li>• at AC-4 maximum</li> </ul>                                     | 300 1/h   |

| Control circuit/ Control  |               |
|---|---------------|
| <b>Type of voltage of the control supply voltage</b>                                  | DC            |
| <b>Control supply voltage at DC</b>   |               |
| <ul style="list-style-type: none"> <li>• rated value</li> </ul>                       | 24 V          |
| <b>Operating range factor control supply voltage rated value of magnet coil at DC</b> |               |
| <ul style="list-style-type: none"> <li>• initial value</li> </ul>                     | 0.7           |
| <ul style="list-style-type: none"> <li>• Full-scale value</li> </ul>                  | 1.25          |
| <b>Design of the surge suppressor</b>   | with varistor |
| <b>Closing power of magnet coil at DC</b>   | 4.5 W         |

|  |                  |
|--|------------------|
| <b>Holding power of magnet coil at DC</b>                | 4.5 W            |
| <b>Closing delay</b>                                     |                  |
| • at DC  | 50 ... 170 ms    |
| <b>Opening delay</b>                                     |                  |
| • at DC  | 15 ... 17.5 ms   |
| <b>Arcing time</b>                                       | 10 ... 10 ms     |
| <b>Control version of the switch operating mechanism</b> | Standard A1 - A2 |

#### Auxiliary circuit

|   |   |
|---|---|
| <b>Number of NC contacts for auxiliary contacts</b> |   |
| • instantaneous contact                             | 1   |
| <b>Number of NO contacts for auxiliary contacts</b> |   |
| • instantaneous contact                             | 1   |
| <b>Operating current at AC-12 maximum</b>           | 10 A  |
| <b>Operating current at AC-15</b>                   |   |
| • at 230 V rated value                              | 10 A  |
| • at 400 V rated value                              | 3 A   |
| • at 500 V rated value                              | 2 A   |
| • at 690 V rated value                              | 1 A   |
| <b>Operating current at DC-12</b>                   |   |
| • at 24 V rated value                               | 10 A  |
| • at 48 V rated value                               | 6 A   |
| • at 60 V rated value                               | 6 A   |
| • at 110 V rated value                              | 3 A   |
| • at 125 V rated value                              | 2 A   |
| • at 220 V rated value                              | 1 A   |
| • at 600 V rated value                              | 0.15 A  |
| <b>Operating current at DC-13</b>                   |   |
| • at 24 V rated value                               | 10 A  |
| • at 48 V rated value                               | 2 A   |
| • at 60 V rated value                               | 2 A   |
| • at 110 V rated value                              | 1 A   |
| • at 125 V rated value                              | 0.9 A   |
| • at 220 V rated value                              | 0.3 A   |
| • at 600 V rated value                              | 0.1 A   |
| <b>Contact reliability of auxiliary contacts</b>    | 1 faulty switching per 100 million (17 V, 1 mA) |

#### UL/CSA ratings

|   |      |
|---|------|
| <b>Full-load current (FLA) for three-phase AC motor</b> |      |
| • at 480 V rated value                                  | 14 A |
| • at 600 V rated value                                  | 17 A |
| <b>Yielded mechanical performance [hp]</b>              |      |
| • for single-phase AC motor                             |      |

|   |             |
|---|-------------|
| — at 110/120 V rated value                                  | 1 hp        |
| — at 230 V rated value                                      | 3 hp        |
| • for three-phase AC motor                                  |             |
| — at 200/208 V rated value                                  | 3 hp        |
| — at 220/230 V rated value                                  | 5 hp        |
| — at 460/480 V rated value                                  | 10 hp       |
| — at 575/600 V rated value                                  | 15 hp       |
| <b>Contact rating of auxiliary contacts according to UL</b> | A600 / P600 |

### Short-circuit protection

|   |   |
|---|---|
| <b>Design of the fuse link</b>                                  |   |
| • for short-circuit protection of the main circuit              |   |
| — with type of coordination 1 required                          | gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) |
| — with type of assignment 2 required                            | gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) |
| • for short-circuit protection of the auxiliary switch required | gG: 10 A (500 V, 1 kA)  |

### Installation/ mounting/ dimensions

|                              |  |
|------------------------------|--|
| <b>Mounting position</b>     | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b>         | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715   |
| • Side-by-side mounting      | Yes  |
| <b>Height</b>                | 102 mm   |
| <b>Width</b>                 | 45 mm  |
| <b>Depth</b>                 | 107 mm   |
| <b>Required spacing</b>      |  |
| • with side-by-side mounting |  |
| — forwards                   | 10 mm  |
| — upwards                    | 10 mm  |
| — downwards                  | 10 mm  |
| — at the side                | 0 mm   |
| • for grounded parts         |  |
| — forwards                   | 10 mm  |
| — upwards                    | 10 mm  |
| — at the side                | 6 mm   |
| — downwards                  | 10 mm  |
| • for live parts             |  |
| — forwards                   | 10 mm  |
| — upwards                    | 10 mm  |
| — downwards                  | 10 mm  |

— at the side

6 mm






## Connections/ Terminals


|  |   |
|--|---|
| <b>Type of electrical connection</b> <ul style="list-style-type: none"><li>• for main current circuit</li><li>• for auxiliary and control current circuit</li><li>• at contactor for auxiliary contacts</li><li>• of magnet coil</li></ul>   | spring-loaded terminals<br>spring-loaded terminals<br>Spring-type terminals<br>Spring-type terminals  |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"><li>• for main contacts<ul style="list-style-type: none"><li>— solid</li><li>— single or multi-stranded</li><li>— finely stranded with core end processing</li><li>— finely stranded without core end processing</li></ul></li><li>• at AWG conductors for main contacts</li></ul> | 2x (1 ... 10 mm <sup>2</sup> )<br>2x (1 ... 10 mm <sup>2</sup> )<br>2x (1 ... 6 mm <sup>2</sup> )<br>2x (1 ... 6 mm <sup>2</sup> )<br>2x (18 ... 8) |
| <b>Connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"><li>• solid</li><li>• stranded</li><li>• finely stranded with core end processing</li><li>• finely stranded without core end processing</li></ul>   | 1 ... 10 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup><br>1 ... 6 mm <sup>2</sup><br>1 ... 6 mm <sup>2</sup>  |
| <b>Connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"><li>• single or multi-stranded</li><li>• finely stranded with core end processing</li><li>• finely stranded without core end processing</li></ul>  | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 1.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"><li>• for auxiliary contacts<ul style="list-style-type: none"><li>— single or multi-stranded</li><li>— finely stranded with core end processing</li><li>— finely stranded without core end processing</li></ul></li><li>• at AWG conductors for auxiliary contacts</li></ul>       | 2x (0,5 ... 2,5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 14)                       |
| <b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"><li>• for main contacts</li><li>• for auxiliary contacts</li></ul>  | 18 ... 8<br>20 ... 14   |
| <b>Safety related data</b>   |   |
| <b>B10 value</b> <ul style="list-style-type: none"><li>• with high demand rate acc. to SN 31920</li></ul>  | 1 000 000   |
| <b>Proportion of dangerous failures</b> <ul style="list-style-type: none"><li>• with low demand rate acc. to SN 31920</li></ul>  | 40 %  |






|   |             |
|---|-------------|
| • with high demand rate acc. to SN 31920                                  | 73 %        |
| <b>Failure rate [FIT]</b>   |             |
| • with low demand rate acc. to SN 31920                                   | 100 FIT     |
| <b>Product function</b>   |             |
| • Mirror contact acc. to IEC 60947-4-1                                    | Yes         |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | 20 y        |
| <b>Protection against electrical shock</b>                                | finger-safe |

### Certificates/ approvals

|  |  |
|--|--|
| <b>General Product Approval</b>  | <b>EMC</b>   |
| <br>CCC | <br>CSA   |
| <br>UL  | <br>EAC |
|  | <br>RCM |

|  |  |  |
|--|--|--|
| <b>Functional Safety/Safety of Machinery</b> | <b>Declaration of Conformity</b>   | <b>Test Certificates</b>                           |
| <a href="#">Type Examination Certificate</a> | <br>EG-Konf. | <a href="#">Miscellaneous</a>                      |
|  |  | <a href="#">Type Test Certificates/Test Report</a> |
|  |  | <a href="#">Special Test Certificate</a>           |
|  |  | <a href="#">Miscellaneous</a>                      |

|  |   |  |  |   |   |
|--|---|--|--|---|---|
| <b>Marine / Shipping</b>   |   |  |  |   |   |
| <br>ABS | <br>BUREAU VERITAS | <br>LRS | <br>PRS | <br>RINA | <br>RMRS |

|   |  |
|---|--|
| <b>Marine / Shipping</b>  | <b>other</b>   |
| <br>DNV-GL<br>DNVGL.COM/AF | <a href="#">Confirmation</a>   |
|   | <br>VDE |

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2025-2KB40>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2025-2KB40>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2025-2KB40>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2025-2KB40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2025-2KB40&lang=en)


**Characteristic: Tripping characteristics,  $I^2t$ , Let-through current**


<https://support.industry.siemens.com/cs/ww/en/ps/3RT2025-2KB40/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2025-2KB40&objectype=14&gridview=view1>

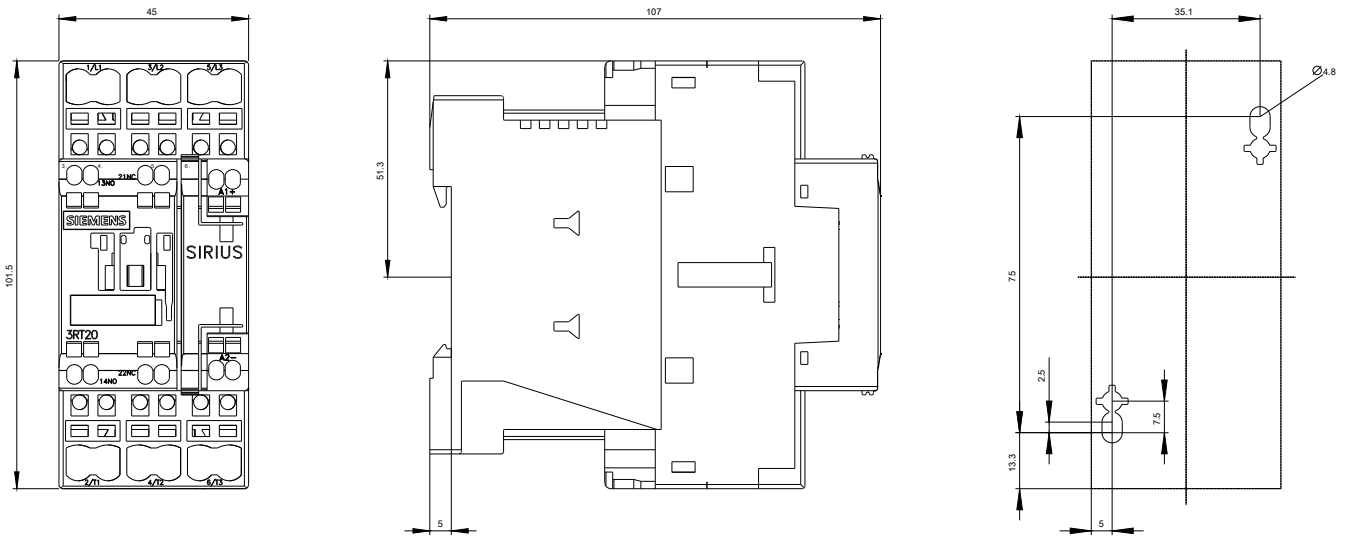

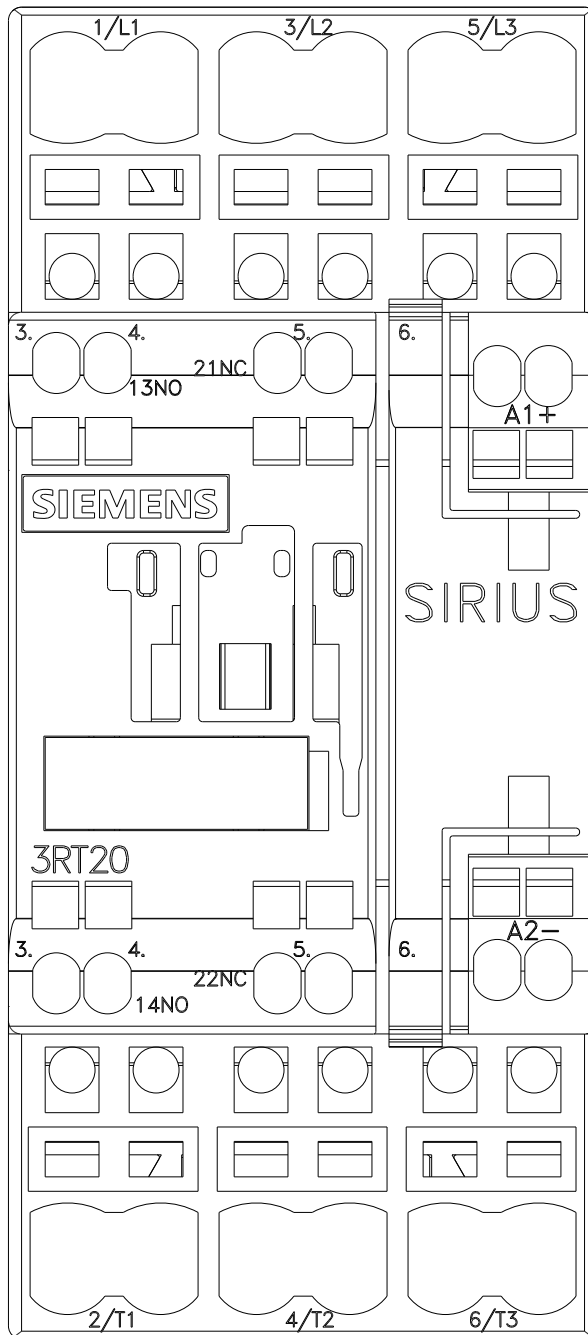

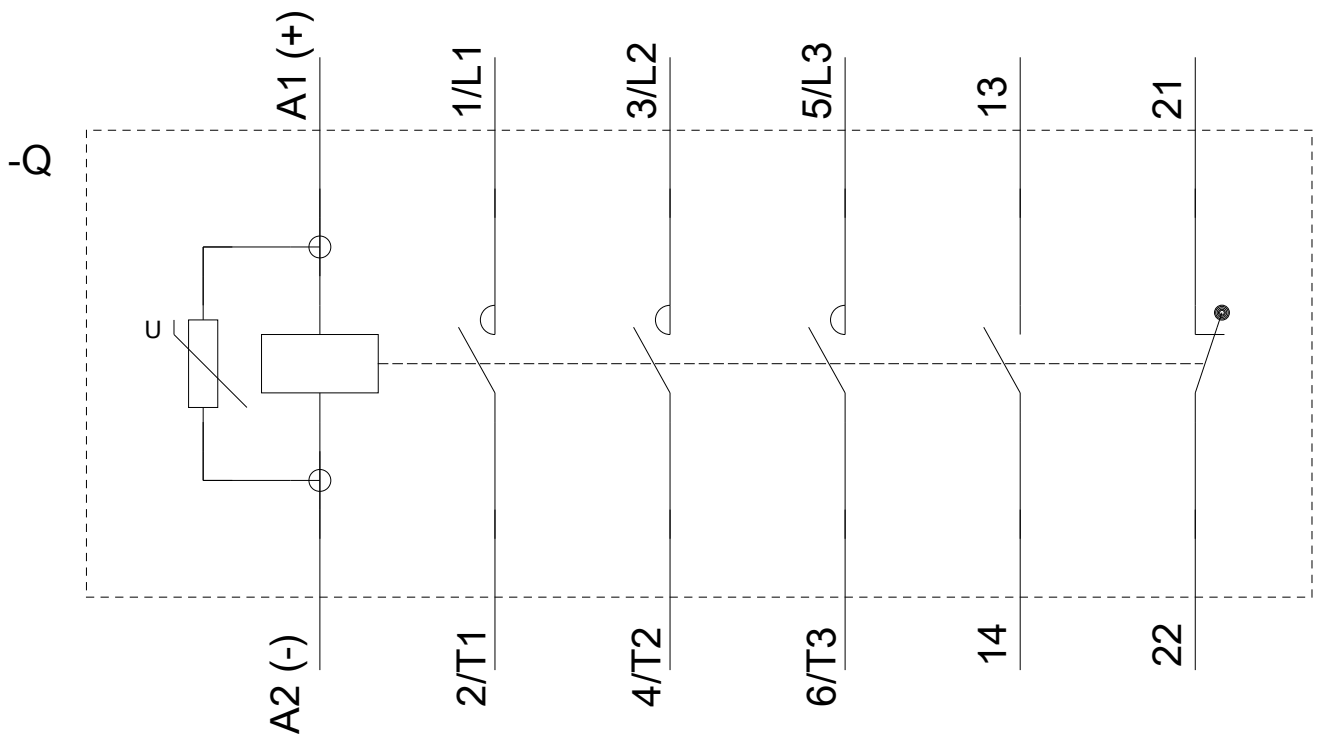

last modified:

02/18/2020