
SIEMENS

3RM1910-1BA Data sheet

> Accessory for SIRIUS 3RM1 3-phase busbar for 3 motor starters Modular spacing 22.5 mm Screw connection system

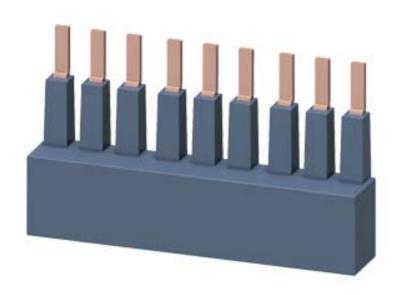

General technical data				
Product brand name		SIRIUS		
Product designation		3-phase busbar		
Design of the product		For 3 motor starters		
Suitability for use		Motor starter 3RM1		
Product function Short circuit protection		No		
Installation altitude at height above sea level	m	2 000		
maximum				
Ambient temperature				
during operation	°C	-25 + 60		
 during transport 	°C	-40 +70		
during storage	°C	-40 +70		
Insulation voltage rated value	V	500		
Reference code acc. to DIN EN 81346-2		X		

Safety related data	
Protection against electrical shock	finger-safe

Main circuit

Relative symmetrical tolerance of the operating	%	10
voltage		
Ampacity maximum	Α	25
Operating current at AC at 480 V acc. to UL 508	Α	16

Installation/ mounting/ dimensions				
Mounting position		any		
Mounting type		screw fixing		
Width	mm	69		
Height	mm	41		
Depth	mm	12		

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity











Miscellaneous

Test Certific- ates	other	Railway	
Type Test Certific-	Confirmation	Special Test Certi-	
ates/Test Report		ficate	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1910-1BA


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1910-1BA

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RM1910-1BA

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1910-1BA&lang=en

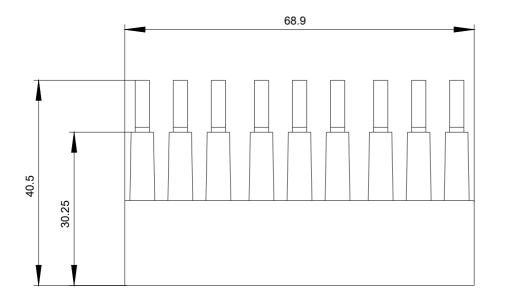



last modified:

03/25/2020 🖸