




Materiál:	Polyamid V0 dle UL 94, vyztužený skelným vláknem
O-kroužek:	NBR
Krytí:	IP 68 (10barů)
Provozní teplota:	-20°C až +85°C
Barva:	černá

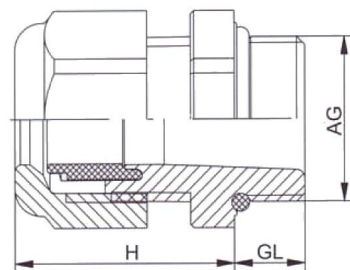

AG	\varnothing mm	\varnothing mm	H mm	GL mm	Obj. číslo metrický závit	GL dlouhý závit	Obj. číslo dlouhý závit
M 12 × 1,5	3 - 6,5	15	21	8	1.292.1201.50	15	1.292.1201.30
M 12 × 1,5	2 - 5	15	21	8	1.292.1201.51	15	1.292.1201.31
M 16 × 1,5	4 - 8	19	22	8	1.292.1601.50	15	1.292.1601.30
M 16 × 1,5	3 - 6	19	22	8	1.292.1601.51	15	1.292.1601.31
M 16 × 1,5	5 - 10	22	25	8	1.292.1611.50	15	1.292.1611.30
M 16 × 1,5	3 - 7	22	25	8	1.292.1611.51	15	1.292.1611.31
M 20 × 1,5	6 - 12	25	27	9	1.292.2001.50	15	1.292.2001.30
M 20 × 1,5	5 - 9	25	27	9	1.292.2001.51	15	1.292.2001.31
M 20 × 1,5	10 - 14	27	28	9	1.292.2016.50	15	1.292.2016.30
M 20 × 1,5	7 - 12	27	28	9	1.292.2016.51	15	1.292.2016.31
M 25 × 1,5	13 - 18	33	31	11	1.292.2501.50	15	1.292.2501.30
M 25 × 1,5	9 - 16	33	31	11	1.292.2501.51	15	1.292.2501.31
M 32 × 1,5	18 - 25	42	39	11	1.292.3201.50	15	1.292.3201.30
M 32 × 1,5	13 - 20	42	39	11	1.292.3201.51	15	1.292.3201.31
M 40 × 1,5	22 - 32	53	48	13	1.292.4001.50	18	1.292.4001.30
M 40 × 1,5	20 - 26	53	48	13	1.292.4001.51	18	1.292.4001.31
M 50 × 1,5	32 - 38	60	49	13	1.292.5001.50	18	1.292.5001.30
M 50 × 1,5	25 - 31	60	49	13	1.292.5001.51	18	1.292.5001.31
M 63 × 1,5	37 - 44	65/68	49	14	1.292.6301.50	18	1.292.6301.30
M 63 × 1,5	29 - 35	65/68	49	14	1.292.6301.51	18	1.292.6301.31

NPT

NPT 3/8"	4-8	19/22	22	15	1.292.3801.70
NPT 3/8"	2-6	19/22	22	15	1.292.3801.71
NPT 1/2"	6-12	24	27	13	1.292.1201.70
NPT 1/2"	5-9	24	27	13	1.292.1201.71
NPT 1/2" (16)	10-14	27	28	13	1.292.1216.70
NPT 1/2" (16)	7-12	27	28	13	1.292.1216.71
NPT 3/4"	13-18	33	31	14	1.292.3401.70
NPT 3/4"	9-16	33	31	14	1.292.3401.71
NPT 1"	18-25	42	39	19	1.292.1001.70
NPT 1"	13-20	42	39	19	1.292.1001.71
NPT 1 1/4"	18-25	42/46	39	16	1.292.5401.70
NPT 1 1/4"	13-20	42/46	39	16	1.292.5401.71
NPT 1 1/2"	22-32	53	48	20	1.292.6401.70
NPT 1 1/2"	20-26	53	48	20	1.292.6401.71