





surge arrester UL, type 1 3-pole, 480Y/277V (wye) with remote signaling contact  
The device only has cULus certification and no CE marking

General data	
number of SPD ports	1
design of the product	Surge arrester
design of pole	3
fastening method	DIN rail NS 35
material of the enclosure	thermoplast
size of surge arrester	3 MW
protection class IP at connection all terminals	IP20
relative humidity during operation	0 ... 95 %
installation altitude at height above sea level maximum	2 000 m
width	54 mm
height	90 mm
depth	66 mm
net weight	362 g
Electrical data	
<b>operating voltage</b>	
• at AC	277 V
value range of the operating frequency	50 / 60 Hz
discharge current 1 phase at (8/20) $\mu$ s maximum	50 kA
<b>protection level</b>	
• between L and L maximum	2.5 kV
• between L and PE maximum	1.2 kV
Connections/ Terminals	
type of electrical connection	Screw terminal
stripped length	12 mm
tightening torque	4 ... 5.1 N·m
<b>connectable conductor cross-section</b>	
• for finely stranded conductor	2.5 ... 25 mm <sup>2</sup>
• for rigid conductor	2.5 ... 25 mm <sup>2</sup>
• finely stranded	2.5 ... 25 mm <sup>2</sup>
AWG number as coded connectable conductor cross section	14 ... 4
signal design	Optical, remote signaling contact
Indicator/remote signaling	
type of voltage supply	NEC class 2 circuits
product component remote signaling contact	Yes
switching function of the remote signaling contacts	changeover contact
connectable conductor cross-section for remote signaling contacts for rigid conductor	0.34 ... 1.5 mm <sup>2</sup>
connectable conductor cross-section for remote signaling contacts for finely stranded conductor	0.34 ... 1.5 mm <sup>2</sup>
AWG number as coded connectable conductor cross section for	22 ... 16

remote signaling contacts	
tightening torque for remote signaling contacts	0.2 N·m
<b>NEMA/UL - Data</b>	
short-circuit rating (SCCR) according to UL	200 kA
type of surge protective device (SPD) according to UL	open type 1 SPD
<b>Maximum Continuous Operating Voltage (MCOV)</b>	
• between L and L	770 V
• between L and Ground (GND)	385 V
<b>discharge current</b>	
• between L and Ground (GND) according to UL rated value	20 kA
• between L and L according to UL rated value	20 kA
<b>tightening torque [lbf·in]</b>	
• with screw-type terminals	35 ... 45 lbf·in
• for remote signaling contacts	3 lbf·in
stripped length [in]	0.5 in
<b>AWG number as coded connectable conductor cross section</b>	
• according to UL	14 ... 4
• for remote signaling contacts according to UL	22 ... 16
<b>ambient temperature</b>	
• during operation	-40 ... +85 °C
• during storage	-40 ... +85 °C
installation altitude above sea level according to UL	6 562 ft
gross weight [lb] according to UL	0.81 lb(av)
net weight [lb] according to UL	0.77 lb(av)
combustibility class according to UL 94	V0
standards according to UL	UL 1449 Edition 5; CSA - C22.2 No. 269.1

#### Approvals Certificates

General Product Approval	other	Environment
<a href="#">Confirmation</a> 	<a href="#">Confirmation</a> 	<a href="#">Miscellaneous</a> <a href="#">Environmental Confirmations</a>

#### Environment

[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SD7413-1KU02>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/5SD7413-1KU02>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SD7413-1KU02](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD7413-1KU02)

##### CAx-Online-Generator

<http://www.siemens.com/cax>

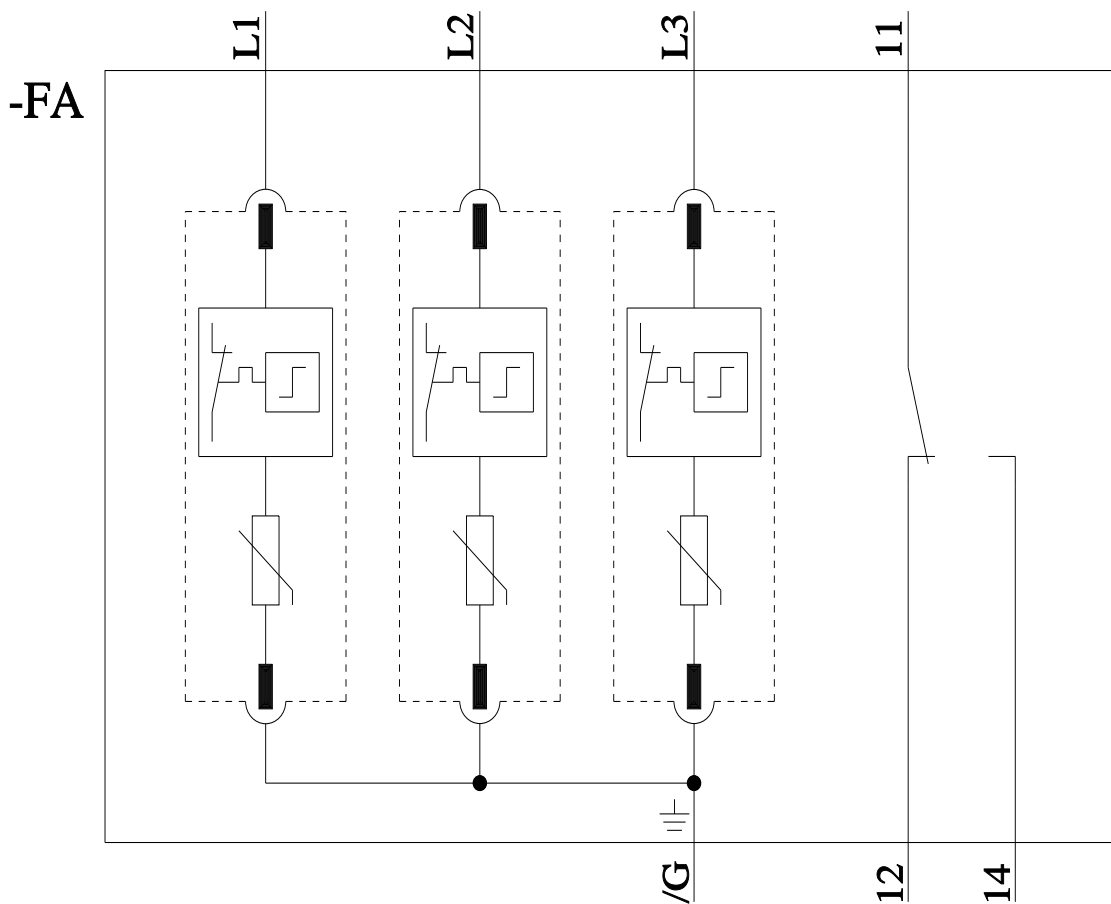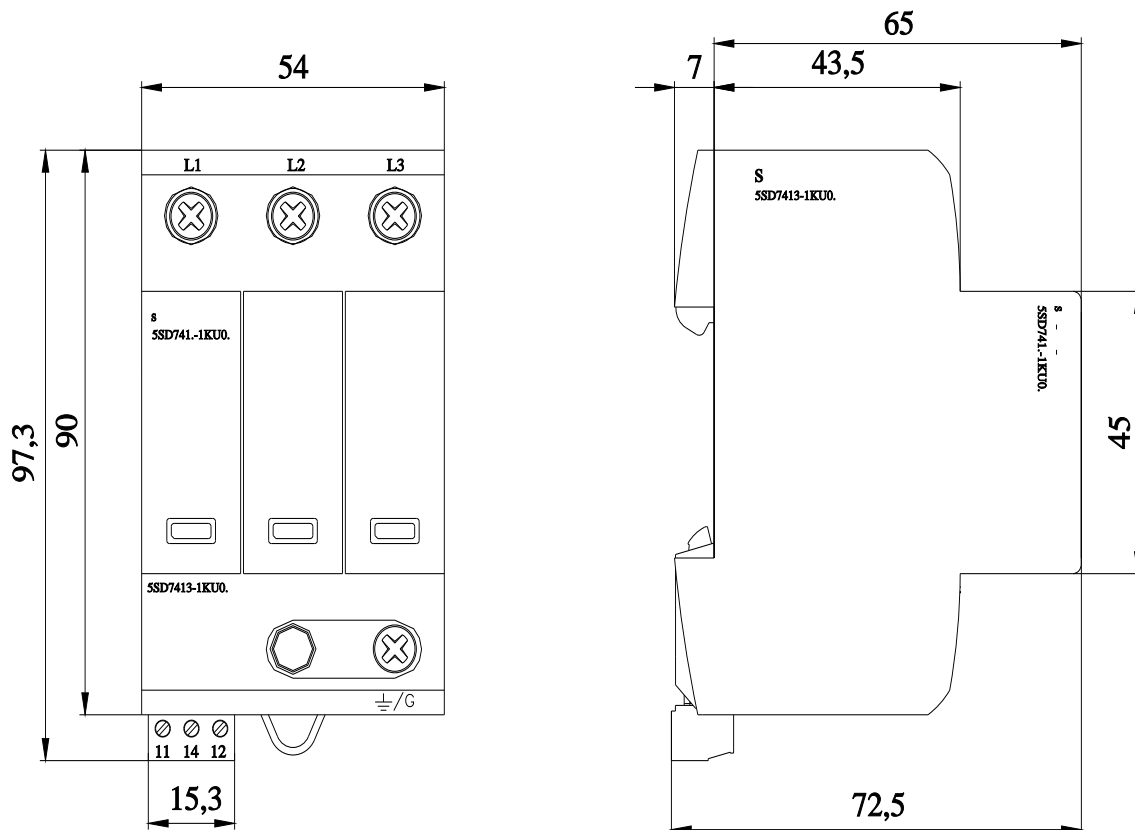

last modified:

7/30/2024

