

HEAVY DUTY COPPER TUBE TERMINALS TYPE 2AM for copper conductors



Description:

- 2A-M series lugs are manufactured from electrolytic copper tube Cu-OF CW008A conform to UNI EN 13600:2003. They feature a double length barrel for enhanced electrical and mechanical performance in heavy duty applications.
- Cembre lugs are annealed to guarantee optimum ductility which is an absolute necessity for connectors which will have to withstand the severe deformation arising when compressed and any bending of the palm during installation.
- In applications subject to vibration, terminals still have to perform a reliable connection, annealing plays a vital role in avoiding cracking or breaks between the barrel and palm.
- The absence of an inspection hole prevents the entry of water or moisture into the crimped joint making these terminals suitable for outdoor applications.
- Lugs are electrolytically tin plated with a minimum thickness of 3µm to avoid oxidation. 2A-M series lugs form an important part of Cembre crimping systems for power carrying conductors.

Each connector is marked as follows:

- Cembre trade mark and reference number.
- Nature and size of conductor (mm²).
- Ø stud (mm).

Markings:



- **Conform to products norm IEC 61238-1**
- **BT Directive EEC 2006/95**

Cembre SpA


Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766

Web: www.cembre.com - Email: info@cembre.com

HEAVY DUTY COPPER TUBE TERMINALS TYPE 2AM for copper conductors

Sections and Dimensions:

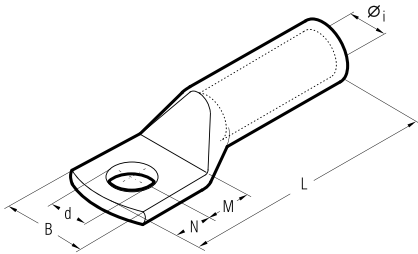

Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm					
			Øi	B	M	N	L	d
16	8	2 A 3-M 8	5,8	15,0	9	8	43,5	8,4
	10	2 A 3-M 10	5,8	18,0	11	10	47,5	10,5
25	8	2 A 5-M 8	7,0	15,0	9	8	51,0	8,4
	10	2 A 5-M 10	7,0	18,0	11	10	55,0	10,5
	12	2 A 5-M 12	7,0	21,0	14	12	60,0	13,2
35	8	2 A 7-M 8	8,9	17,0	9	8	53,0	8,4
	10	2 A 7-M 10	8,9	19,0	11	10	57,0	10,5
	12	2 A 7-M 12	8,9	21,0	14	12	62,0	13,2
50	10	2 A 10-M 10	10,0	20,0	11	10	63,0	10,5
	12	2 A 10-M 12	10,0	21,0	14	12	68,0	13,2
	14	2 A 10-M 14	10,0	25,0	16	14	72,0	15,0
63	16	2 A 10-M 16	10,0	26,0	18	16	76,0	17,0
	10	2 A 14-M 10	11,3	21,0	11	10	70,0	10,5
	12	2 A 14-M 12	11,3	22,0	14	12	75,0	13,2
70	14	2 A 14-M 14	11,3	25,0	16	14	79,0	15,0
	16	2 A 14-M 16	11,3	26,0	18	16	83,0	17,0
	10	2 A 19-M 10	13,5	25,0	11	10	76,5	10,5
95	12	2 A 19-M 12	13,5	25,0	14	12	81,5	13,2
	14	2 A 19-M 14	13,5	25,0	16	14	85,5	15,0
	16	2 A 19-M 16	13,5	27,0	18	16	90,5	17,0
120	20	2 A 19-M 20	13,5	29,5	22	20	97,5	21,0
	10	2 A 24-M 10	15,2	28,5	11	10	82,0	10,5
	12	2 A 24-M 12	15,2	28,5	14	12	87,0	13,2
125	14	2 A 24-M 14	15,2	28,5	16	14	91,0	15,0
	16	2 A 24-M 16	15,2	28,5	18	16	95,0	17,0
	20	2 A 24-M 20	15,2	30,0	22	20	103,0	21,0
150	10	2 A 30-M 10	16,7	31,5	13	11	92,0	10,5
	12	2 A 30-M 12	16,7	31,5	16	14	98,0	13,2
	14	2 A 30-M 14	16,7	31,5	18	16	102,0	15,0
	16	2 A 30-M 16	16,7	31,5	19	17	104,0	17,0
185	20	2 A 30-M 20	16,7	31,5	22	20	110,0	21,0
	12	2 A 37-M 12	19,2	35,5	16	14	108,0	13,2
	14	2 A 37-M 14	19,2	35,5	18	16	112,0	15,0
	16	2 A 37-M 16	19,2	35,5	19	17	114,0	17,0
240	20	2 A 37-M 20	19,2	35,5	22	20	120,0	21,0
	12	2 A 48-M 12	21,1	39,0	16	14	109,0	13,2
	14	2 A 48-M 14	21,1	39,0	18	16	113,0	15,0
	16	2 A 48-M 16	21,1	39,0	19	17	115,0	17,0
300	20	2 A 48-M 20	21,1	39,0	22	20	121,0	21,0
	12	2 A 60-M 12	23,7	44,0	20	14	129,5	13,2
	14	2 A 60-M 14	23,7	44,0	22	16	133,5	15,0
	16	2 A 60-M 16	23,7	44,0	22	19	136,5	17,0
400	20	2 A 60-M 20	23,7	44,0	24	23	142,5	21,0
	12	2 A 80-M 12	27,0	51,0	22	19	140,0	13,2
	14	2 A 80-M 14	27,0	51,0	22	19	140,0	15,0
	16	2 A 80-M 16	27,0	51,0	22	19	140,0	17,0
500	20	2 A 80-M 20	27,0	51,0	24	23	146,0	21,0
	16	2 A 100-M 16	30,3	56,5	22	19	147,0	17,0
	20	2 A 100-M 20	30,3	56,5	24	23	153,0	21,0
630	16	2 A 120-M 16	33,4	61,5	22	19	159,0	17,0
	20	2 A 120-M 20	33,4	61,5	24	23	165,0	21,0
800	20	2 A 160-M 20	38,0	72,0	24	23	187,0	21,0
1000	20	2 A 200-M 20	44,0	80,0	24	23	202,0	21,0

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766

Web: www.cembre.com - Email: info@cembre.com