



- Universal industrial enclosures for hygienic areas
- High quality surface 1.4301
- No gaps between lid/base
- Enclosure rating up to IP 69K (on request)
- Optional individual sizes and versions from 25 off (see p. 31/32)

### **Included in delivery:**

Enclosure base with bracket clips and threaded hole for attachment of DIN rails, 4 mounting bosses with attachment holes and sealing plugs, alternatively available without fastening holes, lid with stud bolts inside and permanently attached lid screws.

### **Technical data**

#### **Material:**

stainless steel 1.25 mm or 1.5 mm; 1.4301 / 304  
other materials on request

#### **Ingress protection:**

IP 66 to EN 60529  
high pressure cleaner-resistant version (IP 69K) on request

#### **Seal:**

VMQ (silicone)  
EMC on request

#### **Surface:**

grinded, grain 240  
other surface on request


#### **Temperature range:**

-40°C to +80°C  
other temperature ranges on request

# Stainless steel industrial enclosures

## Programme range

Order No.	Dimensions (mm)																		
	Enclosure with mounting bosses and holes	Enclosure with mounting bosses without holes	Mounting plates	Weight (g)	A	B	C	D	E	F	I	K	S	M	X	H <sub>base</sub>	H <sub>tot</sub>	H <sub>D</sub>	
37.10 10 06	37.10 10 96	10.01 10 53	561	100	100	60	84	81	60	20	11,25	1,25	-	M4	46	61	15		
37.15 10 06	37.15 10 96	10.01 10 54	717	150	100	110	84	131	60	20	11,25	1,25	-	M4	46	61	15		
37.15 15 08	37.15 15 98	10.01 10 38	1175	150	150	110	134	131	110	70	14,25	1,25	-	M6	63	81	18		
37.20 10 06		10.01 10 55	914	200	100	160	84	181	60	20	11,25	1,25	-	M4	46	61	15		
37.20 20 08	37.20 20 98	10.01 10 40	1792	200	200	160	184	181	160	120	14,25	1,25	-	M6	63	81	18		
37.20 20 12	37.20 20 92	10.01 10 40	2106	200	200	160	184	181	160	120	14,25	1,25	-	M6	103	121	18		
37.30 15 08		10.01 10 39	1893	300	150	260	134	281	110	70	14,25	1,25	-	M6	63	81	18		
37.30 20 08		10.01 10 41	2367	300	200	260	184	281	160	120	14,25	1,25	-	M6	63	81	18		
37.30 20 12	37.30 20 92	10.01 10 41	2770	300	200	260	184	281	160	120	14,25	1,25	-	M6	103	121	18		
37.30 30 12		10.01 10 44	3792	300	300	260	284	281	260	220	14,25	1,25	-	M6	103	121	18		
37.30 30 16		10.01 10 44	4101	300	300	260	284	281	260	220	14,25	1,25	-	M6	143	161	18		
37.38 38 16		10.01 10 45	5838	380	380	340	364	361	340	300	14,25	1,25	-	M6	143	161	18		
37.40 15 08		10.01 10 56	2370	400	150	360	134	381	110	70	14,25	1,25	-	M6	63	81	18		
37.40 20 12		10.01 10 43	3383	400	200	360	184	381	160	120	14,25	1,25	-	M6	103	121	18		
37.40 30 16		10.01 10 48	5268	400	300	360	284	381	260	220	14,25	1,25	-	M6	143	161	18		
37.50 30 16		10.01 10 57	6237	500	300	460	284	481	260	220	14,25	1,25	230	M6	143	161	18		
37.50 40 16		10.01 10 49	7333	500	400	460	384	481	360	320	14,25	1,25	230	M6	143	161	18		
37.60 20 12		10.01 10 58	5798	600	200	560	184	581	160	120	14,25	1,5	280	M6	103	121	18		
37.99 99 99				Special size acc. specification															

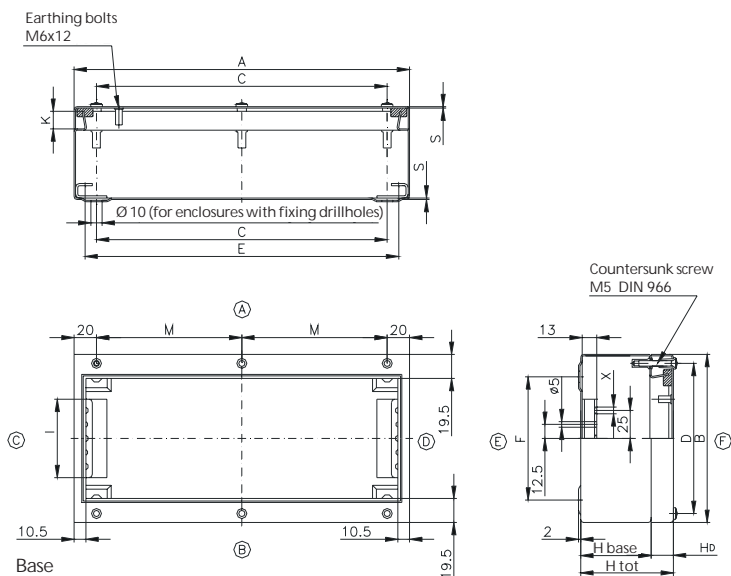

## Accessories

Mounting set (gaskets, nuts and screws)	37.99 00 01
External hinge set (2 pcs.)	37.00 00 02
External mounting bracket (4 pcs.)	37.10 50 00

## External bracket for enclosure with mounting hole

for enclosure type	A	B	C	D	for enclosure type	A	B	C	D
37.10 10 06	130	44	60	60	37.30 30 12	330	244	260	260
37.15 10 06	180	44	110	60	37.30 30 16	330	244	260	260
37.15 15 08	180	94	110	110	37.38 38 16	410	324	340	340
37.20 10 06	230	43	160	60	37.40 15 08	430	94	360	110
37.20 20 08	230	144	160	160	37.40 20 12	430	144	360	160
37.20 20 12	230	144	160	160	37.40 30 16	430	244	360	260
37.30 15 08	330	94	260	110	37.50 30 16	530	244	460	260
37.30 20 08	330	144	260	160	37.50 40 16	530	344	460	360
37.30 20 12	330	144	260	160	37.60 20 12	630	144	560	160

