

FOOT-OPERATED SWITCH MOULDED-PLASTIC  
ENCLOSURE PEDAL PUSHBUTTON,  
ONE PEDAL WITHOUT COVER, 1 CO

## General technical details:

Product designation		momentary-contact foot switch
Product equipment / interlock		No
Product equipment / notch		No
Product component / covering		No
Operating current / at AC-15 / at 230 V / rated value	A	5
Number of switching steps		1
Nature of command		on or off
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		S
Reference code / according to DIN EN 61346-2		S
Mounting type		screw fixing
Width	mm	71
Height	mm	96
Depth	mm	27

## Enclosure:

Material / of the enclosure		plastic with total insulation
Color		black
Color / of the housing		black
Color / of top part of the enclosure		black
Cable gland version		cable, 3 m

## Drive Head:

Number of the activation pedals		1
---------------------------------	--	---

## Contact:

Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		1

## Ambient conditions:

Protection class IP		IP65
Ambient temperature		

• during operating

°C 75 ... -10

#### Certificates/approvals:

Suitability for use / safety cut-out switch

No

#### Certificates/approvals:

General Product Approval

Declaration of Conformity



CSA



EG-Konf.

Shipping Approval

other



ABS



LRS



PRS



RINA

[Confirmation](#)

[other](#)

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**CAX-Online-Generator**


<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<http://support.automation.siemens.com/WWW/view/en/3SE3902-4CB20/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE3902-4CB20](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE3902-4CB20)

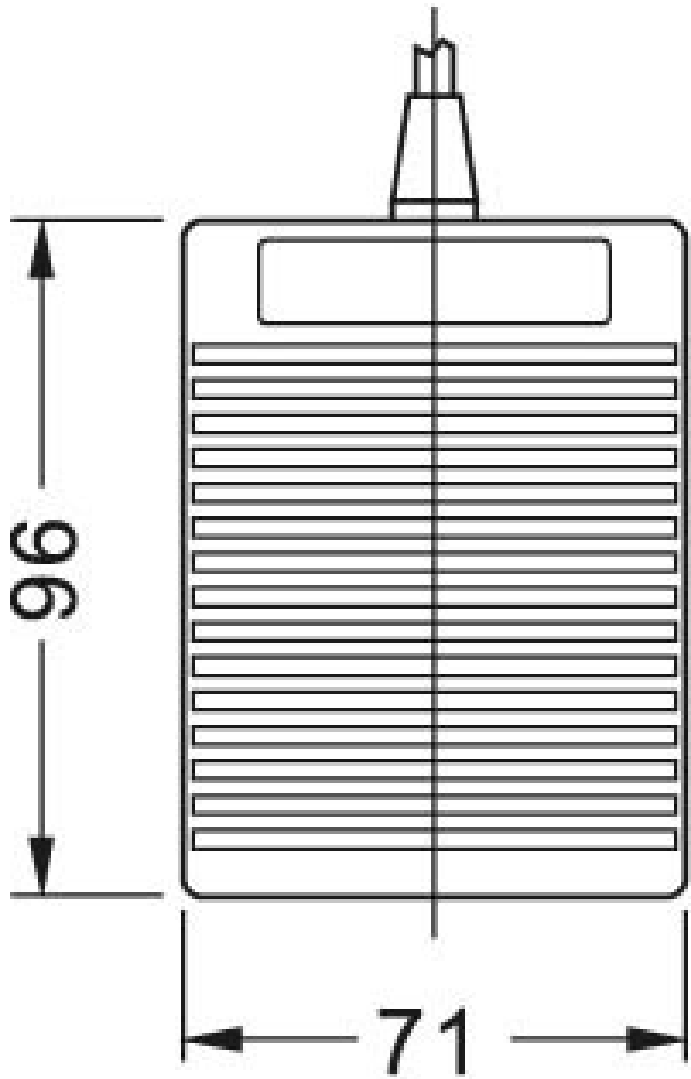

NSC00426

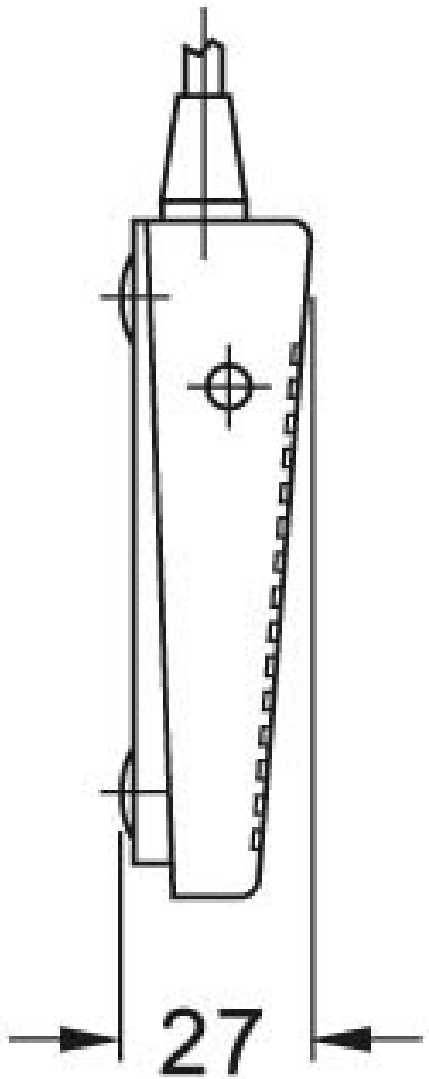

last change:

Jan 21, 2013