







ROD ACTUATOR FOR POSITION SWITCH 3SE51/52
ALUMINUM ROD 200MM,
FORM D DIAMETER 6MM W. TERMINAL

| General technical data: | | |
|---|----|--------------------------------------|
| Product designation | | actuator for part-turn actuator |
| Explosion protection category for dust | | none |
| Mechanical operating cycles as operating time | | 15,000,000 |
| <ul style="list-style-type: none"> • typical | | |
| Resistance against vibration | | 0.35 mm / 5g |
| Resistance against shock | | 30g / 11 ms |
| Ambient temperature | | |
| <ul style="list-style-type: none"> • during operating | °C | -25 ... +85 |
| <ul style="list-style-type: none"> • during storage | °C | -40 ... +90 |
| Design of the operating mechanism | | rod actuator, aluminium, 200 mm long |
| Protection class IP | | IP65/IP67 |
| mounting position | | any |
| Reference code | | |
| <ul style="list-style-type: none"> • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 | | E |
| <ul style="list-style-type: none"> • according to DIN EN 61346-2 | | T |

Certificates/ approvals:

| General Product Approval | Declaration of Conformity | Test Certificates | other |
|---|---|--|------------------------------|
|   |   | Special Test Certificate | Confirmation |

Further information:


Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<http://www.siemens.com/industrial-controls/mall>

Cax online generator
<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3SE5000-0AA80/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5000-0AA80

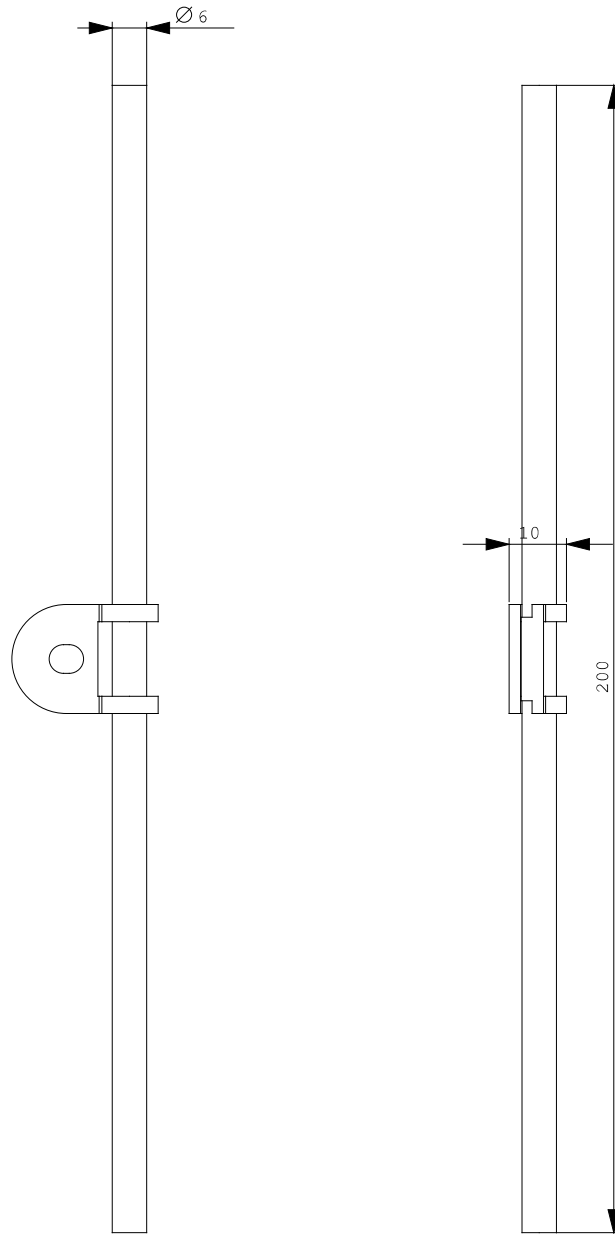

last change:

Jun 16, 2014