





ACTUATOR HEAD FOR POSITION SWITCH 3SE51/52  
 SPRING ROD TOTAL LENGTH 142.5MM;  
 SPRING= 50MM,  
 PLUNGER=50MM STAINLESS STEEL

General technical data:		
<b>Product designation</b>		actuator head for position switch
<b>Explosion protection category for dust</b>		none
<b>Mechanical operating cycles as operating time</b> • typical		10,000,000
<b>Resistance against vibration</b>		0.35 mm / 5g
<b>Resistance against shock</b>		30g / 11 ms
<b>Ambient temperature</b> • during operating • during storage	°C	-25 ... +85 -40 ... +90
<b>Material / of the enclosure</b> • of the switch head		plastic
<b>Design of the operating mechanism</b>		total length = 142.5 mm (spring 50 mm + stainless steel plunger 50 mm)
<b>Protection class IP</b>		IP65/IP67
<b>mounting position</b>		any
<b>Reference code</b> • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2		E T

## Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other		
 CSA		 UL	 EG-Konf.	<a href="#">Special Test Certificate</a>	<a href="#">Confirmation</a>

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

### Cax online generator


<http://www.siemens.com/cax>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5000-0AR02/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE5000-0AR02](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5000-0AR02)

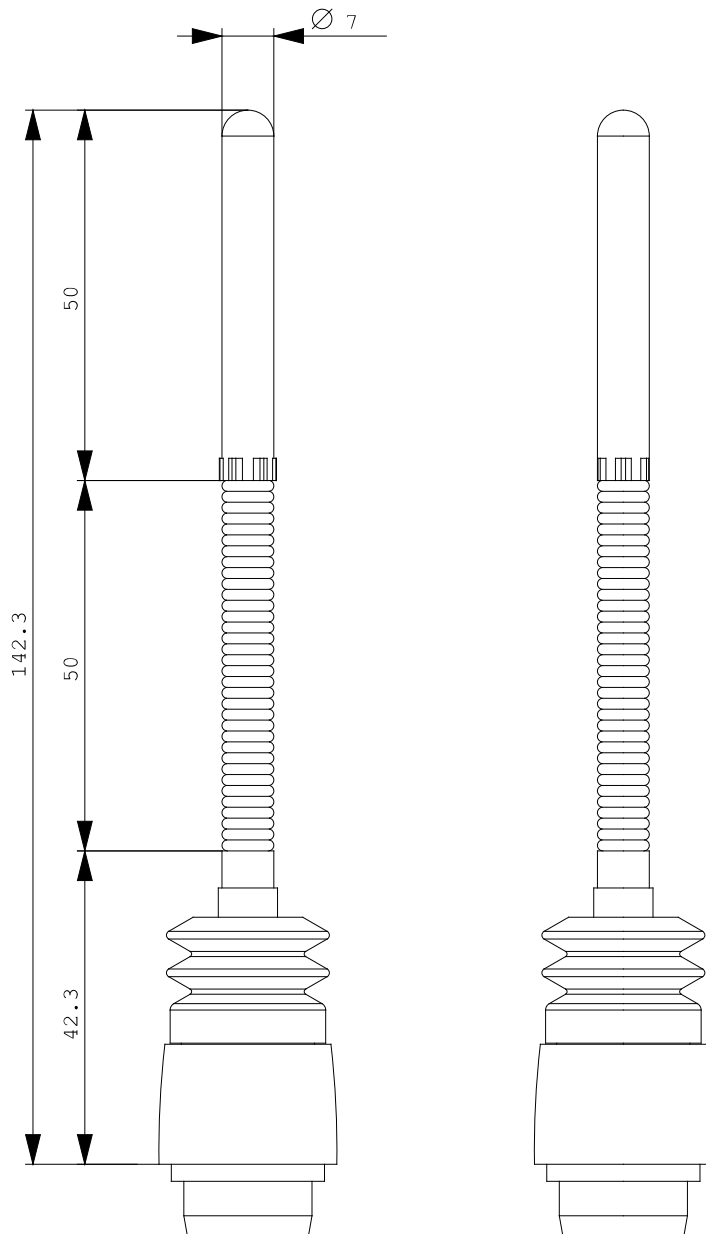

last change:

Jun 16, 2014