SIEMENS

Product data sheet

3NA3475



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 4, 800A, AC 500/DC 440V

Similar to image

| Technical data: | | | | |
|--|----|-------------------------------------|--|--|
| product brand name | | SENTRON | | |
| Product designation | | LV HRC fuse link | | |
| Current / for AC / rated value | А | 800 | | |
| Operating class of the fuse link | | gG | | |
| Size of the fallback-system / acc. to DIN EN 60269-1 | | NH4 | | |
| Supply voltage | | | | |
| • for AC / rated value | V | 500 | | |
| • for DC | V | 400 | | |
| Switching capacity current | | | | |
| • in accordance with IEC 60947-2 / rated value | kA | 120 | | |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 25 | | |
| Design of the fuse link | | LV HRC fuse link | | |
| Design of an identification indicator | | Front indicators | | |
| Mounting type | | Non-insulated grip lugs | | |
| mounting position | | Any, preferably vertical | | |
| Protection class IP | | IP20, with connected conductors | | |
| Climatic class | | -20 to +50 at 95% relative humidity | | |
| Ambient temperature | °C | -5 +40 | | |

| Ambient temperature / during storage / note | | Air humidity 90% at 20 °C |
|---|---|------------------------------|
| Design of the switching contact | | Non-corroding, silver-plated |
| Net weight | g | 2,535 |
| Item designation | | |
| according to DIN EN 61346-2 | | F |
| according to DIN EN 81346-2 | | F |


Certificates/approvals:

| General Product | Approval | Declaration of Conformity | Test Certificates | | other |
|-----------------|----------|------------------------------|-----------------------------|--|--------------------------------|
| GOST | UDE VDE | EG-Konf. | Special Test Certificate | <u>Type Test</u> Certificates/Test <u>Report</u> | Environmental Confirmations |

| .) |
|----|
| - |

http://www.siemens.com/cax

Tender specifications
Datanorm GAEB81 GAEB83 RTF TXT

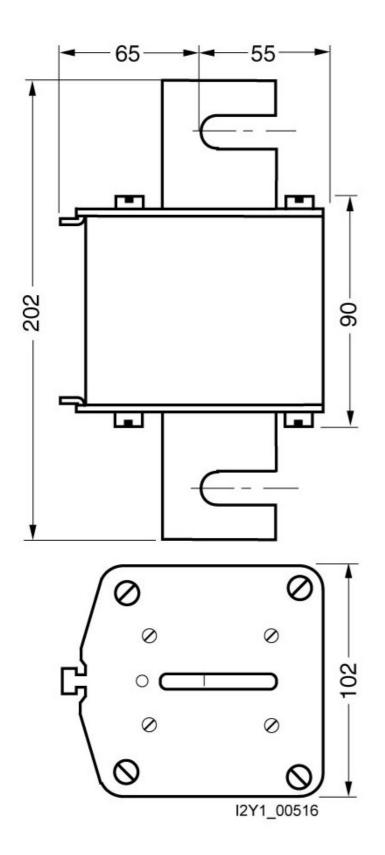

last change:

Jul 14, 2014