



CIRCUIT-BREAKER SZ S0,  
FOR MOTOR PROTECTION, CLASS 10,  
A-RELEASE 10...16A, N-RELEASE 208A,  
SPRING-L. CONNECTION,  
STANDARD SW. CAPACITY,

General technical data:	
<b>product brand name</b>	SIRIUS
<b>Product designation</b>	3RV2 circuit breaker
<b>Size of the circuit-breaker</b>	S0
<b>Number of poles / for main current circuit</b>	3
<b>Product function</b>	
• Short circuit protection	Yes
• overload protection	Yes
• Phase failure detection	Yes
• System protection	Yes
• motor protection	Yes
• motor protection with overload relay function	No
• starter protection	No
• Transformer protection	No
• Disconnecter functionality	Yes
• Main switches with supply disconnect function and EM-STOP switches	No
<b>Design of the operating mechanism</b>	selector switch
<b>Product component</b>	
• Auxiliary switch	No
• undervoltage release	No

• Trip indicator		No
<b>Product expansion</b>		
• Auxiliary switch		Yes
• optional / motor drive		No
<b>Insulation voltage / with degree of pollution 3 / Rated value</b>	V	690
<b>Surge voltage resistance / Rated value</b>	kV	6
<b>Protection class IP</b>		
• of the terminal		IP20
• on the front		IP20
<b>Protection against electrical shock</b>		finger-safe
<b>Installation altitude / at height above sea level / maximum</b>	m	2,000
<b>Relative humidity</b>		
• during operation	%	10 ... 95
<b>Ambient temperature</b>		
• during transport	°C	-50 ... +80
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
<b>Shock resistance / acc. to IEC 60068-2-27</b>		25g / 11 ms
<b>Usage category</b>		
• acc. to IEC 60947-4-1		AC-3
<b>Active power loss / total / typical</b>	W	8.3

#### Main circuit:

<b>Operating voltage / Rated value</b>	V	690
<b>Type of voltage / for main current circuit</b>		AC/DC
<b>Operating frequency</b>		
• Rated value	Hz	50 ... 60
<b>Operating current / at AC-3 / at 400 V / Rated value</b>	A	16

#### Protective and monitoring functions:

<b>Type of protection</b>		Increased safety
<b>Certificate of suitability / ATEX</b>		Yes
<b>Design of the overload circuit breaker</b>		thermal
<b>Adjustable response value current / of the current-dependent overload release</b>	A	10 ... 16
<b>Trip class</b>		CLASS 10
<b>Design of the short-circuit trip</b>		magnetic
<b>Response value current / of the instantaneous short-circuit release</b>	A	208
<b>Operational short-circuit current breaking capacity (Ics) / with AC</b>		

<ul style="list-style-type: none"> <li>• at 240 V / Rated value</li> <li>• at 400 V / Rated value</li> <li>• at 500 V / Rated value</li> <li>• at 690 V / Rated value</li> </ul>	kA	100
	kA	25
	kA	5
	kA	2
<b>Maximum short-circuit current breaking capacity (I<sub>cu</sub>)</b>		
<ul style="list-style-type: none"> <li>• with AC / at 240 V / Rated value</li> <li>• with AC / at 400 V / Rated value</li> <li>• with AC / at 500 V / Rated value</li> <li>• with AC / at 690 V / Rated value</li> </ul>	kA	100
	kA	55
	kA	10
	kA	4
<b>Design of the fuse link / for IT network / for short-circuit protection of the main circuit</b>		
<ul style="list-style-type: none"> <li>• at 400 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>		gL/gG 63 A
		gL/gG 50 A
		gL/gG 40 A
<b>Breaking capacity short-circuit current (I<sub>cn</sub>)</b>		
<ul style="list-style-type: none"> <li>• with 1 current path / for DC / at 150 V / Rated value</li> <li>• with 2 current paths in series / for DC / at 300 V / Rated value</li> <li>• with 3 current paths in series / for DC / at 450 V / Rated value</li> </ul>	kA	10
	kA	10
	kA	10

#### Installation/ mounting/ dimensions:

<b>Mounting type</b>		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
<b>mounting position</b>		any
<b>Depth</b>	mm	96
<b>Height</b>	mm	119
<b>Width</b>	mm	45

#### Connections/ terminals:

<b>Arrangement of electrical connectors / for main current circuit</b>		Top and bottom
<b>Design of the electrical connection / for main current circuit</b>		spring-loaded terminals
<b>Type of connectable conductor cross-section</b>		
<ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>• single or multi-stranded</li> <li>• finely stranded <ul style="list-style-type: none"> <li>• without core end processing</li> <li>• with core end processing</li> </ul> </li> </ul> </li> <li>• for AWG conductors / for main contacts</li> </ul>		2x (1 ... 10 mm <sup>2</sup> )
		2x (1 ... 6 mm <sup>2</sup> )
		2x (1 ... 6 mm <sup>2</sup> )
		2x (18 ... 8)

#### UL/CSA ratings:

<b>Operating voltage / acc. to UL 60947 / Rated value</b>	V	600
<b>Full-load current (FLA) / for three-phase AC motor</b>		
<ul style="list-style-type: none"> <li>• at 480 V / Rated value</li> </ul>	A	16

**Certificates/ approvals:**

**General Product Approval**



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

**Shipping Approval**



**Shipping Approval**

**other**



[Confirmation](#)



[other](#)

[Environmental Confirmations](#)

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**




<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RV2021-4AA20/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RV2021-4AA20](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2021-4AA20)

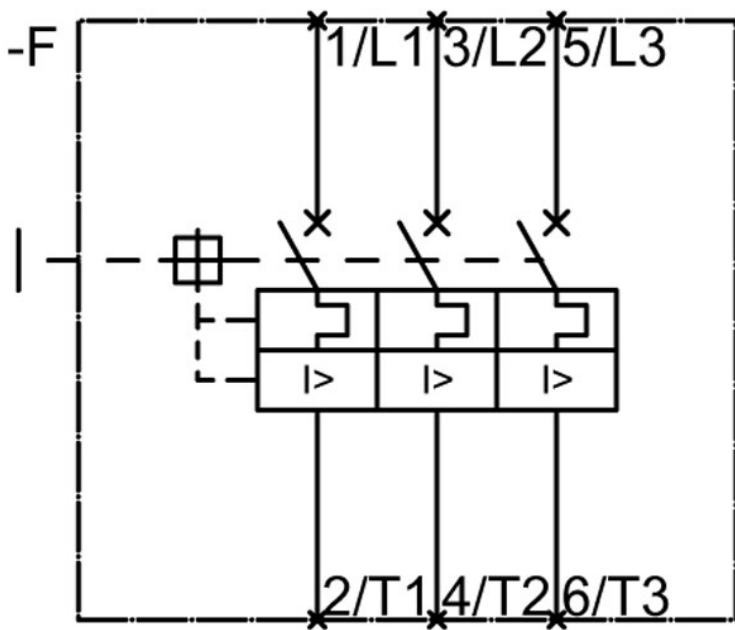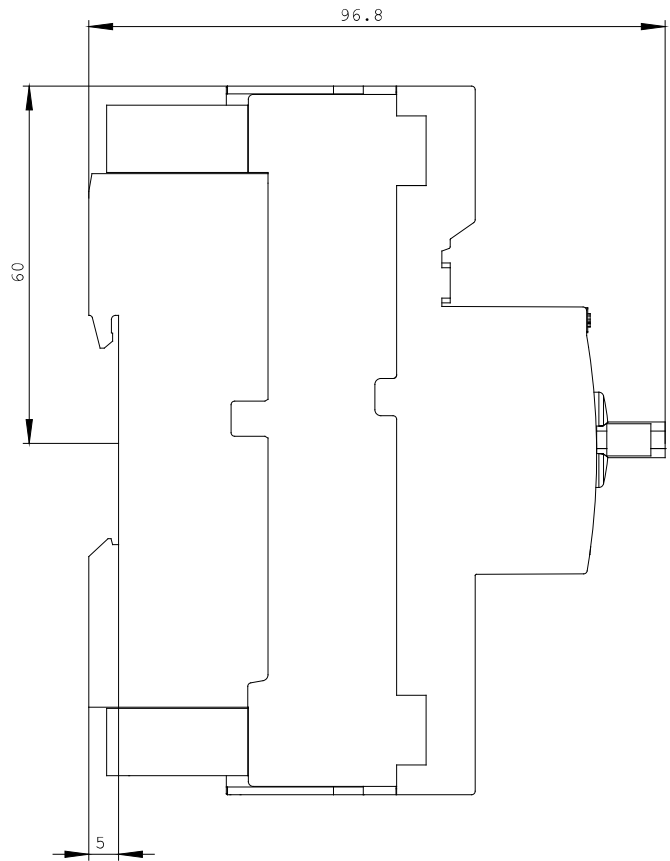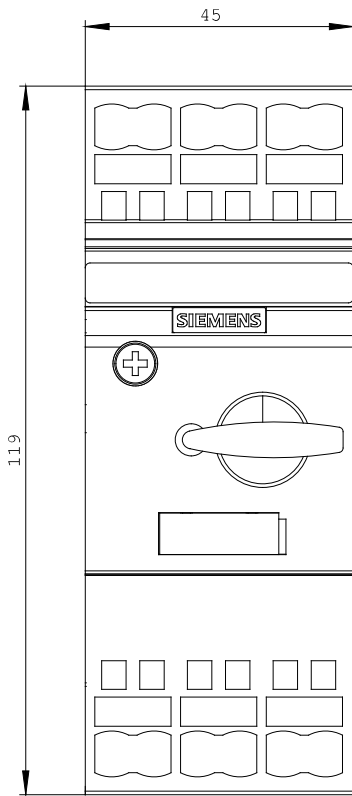

last change:

Oct 20, 2014