

AUX.SWITCH BLOCK,FRONT,1NO+3NC,
 CURR.PATH: 1NC, 1NC, 1NC, 1NO,
 F. CONT. RELAYS A. MOTOR CONT.,
 3RT2 SPRING-LOADED TERMINAL .1 / .2,.1 / .2,.1 / .2,.3 /
 .4

General technical data:

product brand name		SIRIUS
Suitability for use		Contact relay and power contactor
Protection class IP / on the front		IP20
Ambient temperature		
• during storage	°C	-55 ... +80
• during operation	°C	-25 ... +60
Mechanical service life (switching cycles)		
• typical		10,000,000
Electrical endurance (switching cycles) / at AC-15 / at 230 V		
• typical		200,000
Contact reliability		one incorrect switching operation of 100 million switching operations (17 V, 1 mA)
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Insulation voltage / with degree of pollution 3		
• Rated value	V	690
Surge voltage resistance		
• Rated value	kV	6

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts		
---	--	--

• instantaneous contact		3
• lagging switching		0
Number of NO contacts / for auxiliary contacts		
• instantaneous contact		1
• leading contact		0
Operating current / of the auxiliary contacts / at AC-12		
• at 24 V	A	10
• at 230 V	A	10
• maximum	A	10
Operating current		
• of the auxiliary contacts		
• at AC-14		
• at 125 V	A	6
• at 250 V	A	6
• at AC-15		
• at 24 V	A	6
• at 230 V	A	6
• at 400 V	A	3
• at AC-15 / at 690 V	A	1
Operating current		
• with 2 current paths in series / at DC-12		
• at 24 V / Rated value	A	10
• at 60 V / Rated value	A	10
• at 110 V / Rated value	A	4
• at 220 V / Rated value	A	2
• at 440 V / Rated value	A	1.3
• at 600 V / Rated value	A	0.65
• with 3 current paths in series / at DC-12		
• at 24 V / Rated value	A	10
• at 60 V / Rated value	A	10
• at 110 V / Rated value	A	10
• at 220 V / Rated value	A	3.6
• at 440 V / Rated value	A	2.5
• at 600 V / Rated value	A	1.8
Operating current		
• of the auxiliary contacts / at DC-13		
• at 24 V	A	6
• at 60 V	A	2
• at 110 V	A	1
• at 220 V	A	0.3

- with 2 current paths in series / at DC-13

- at 24 V / Rated value
- at 60 V / Rated value
- at 110 V / Rated value
- at 220 V / Rated value
- at 440 V / Rated value
- at 600 V / Rated value

A	10
A	3.5
A	1.3
A	0.9
A	0.2
A	0.1

- with 3 current paths in series / at DC-13

- at 24 V / Rated value
- at 60 V / Rated value
- at 110 V / Rated value
- at 220 V / Rated value
- at 440 V / Rated value
- at 600 V / Rated value

A	10
A	4.7
A	3
A	1.2
A	0.5
A	0.26

Installation/ mounting/ dimensions:

Mounting type		snap-on mounting
Width	mm	36
Height	mm	41.5
Depth	mm	47.7

Connections/ terminals:

Design of the electrical connection		spring-loaded terminals
<ul style="list-style-type: none"> • for auxiliary and control current circuit 		
Type of connectable conductor cross-section		
<ul style="list-style-type: none"> • for auxiliary contacts • finely stranded <ul style="list-style-type: none"> • with core end processing • without core end processing • for AWG conductors / for auxiliary contacts 		2x (0.5 ... 1.5 mm ²) 2x (0.5 ... 2.5 mm ²) 2x (20 ... 14)

Safety:

Product function / Mirror contact acc. to IEC 60947-4-1		Yes
<ul style="list-style-type: none"> • Note 		with 3RT2
Product function / positively driven operation acc. to IEC 60947-5-1		Yes
<ul style="list-style-type: none"> • Note 		with 3RH2

Certificates/ approvals:

General Product Approval

CCC



CSA



UL



EG-Konf.

Declaration of Conformity**Test Certificates**[Special Test Certificate](#)[Type Test Certificates/Test Report](#)**Shipping Approval**

ABS

BUREAU
VERITAS

DNV



GL



LRS



PRS

Shipping Approval

other



RINA





RMRS





VDE

[Environmental Confirmations](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**Cax online generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3RH2911-2HA13/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH2911-2HA13

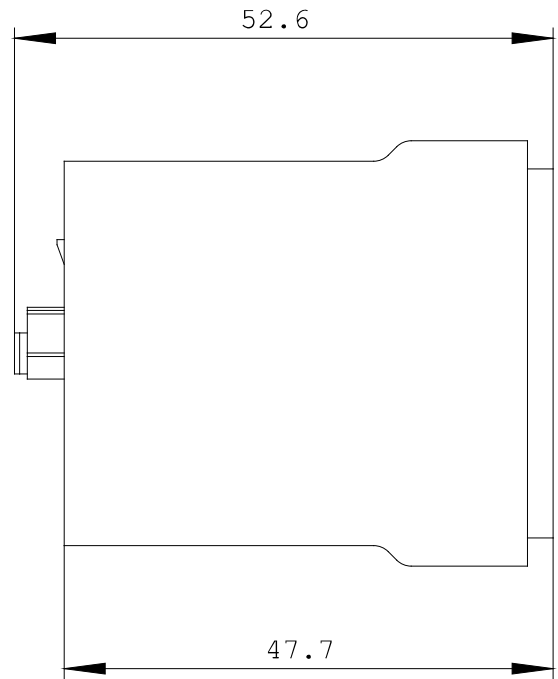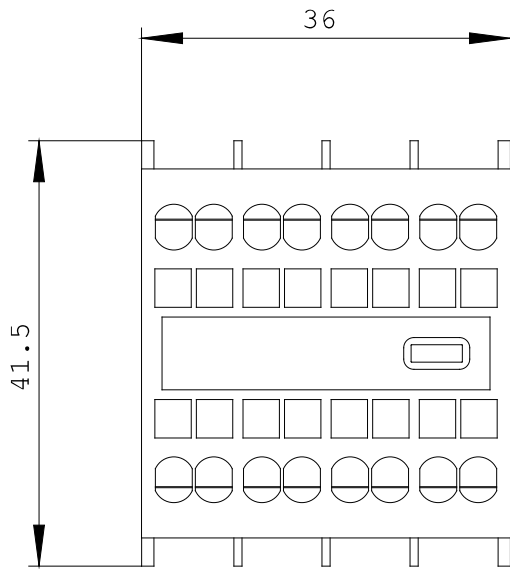

3RT2

3RH2



last change:

Nov 3, 2014