



SIRIUS SOFT STARTER, VALUES WITH 400 V,
40 DEG., STANDARD: 36A, 18,5KW,
INSIDE-DELTA CIRCUIT 3: 62A, 30KW,
200-460 V AC, 230 V AC,
CAGE CLAMP TERMINALS

General details:		
product brand name		SIRIUS
Product feature		
<ul style="list-style-type: none"> integrated bypass contact system 		Yes
<ul style="list-style-type: none"> Thyristors 		Yes
Product function		
<ul style="list-style-type: none"> Intrinsic device protection 		Yes
<ul style="list-style-type: none"> motor overload protection 		Yes
<ul style="list-style-type: none"> Evaluation of thermistor motor protection 		Yes
<ul style="list-style-type: none"> External reset 		Yes
<ul style="list-style-type: none"> Adjustable current limitation 		Yes
<ul style="list-style-type: none"> inside-delta circuit 		Yes
Product component / Motor brake output		Yes
Reference code		
<ul style="list-style-type: none"> acc. to DIN EN 61346-2 		Q
<ul style="list-style-type: none"> acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750 		G
Power Electronics:		
Product designation		soft starters for high feature applications
Operating current		

• at 40 °C / Rated value	A	36
• at 50 °C / Rated value	A	32
• at 60 °C / Rated value	A	29
• for three-phase motors / at 3-phase root switching		
• at 40 °C / Rated value	A	62
• at 50 °C / Rated value	A	55
• at 60 °C / Rated value	A	50
Mechanical power output / for three-phase motors		
• at 230 V / at standard circuit / at 40 °C		
• Rated value	W	7,500
• at 400 V / at standard circuit / at 40 °C		
• Rated value	W	18,500
• at 230 V / at 3-phase root switching / at 40 °C		
• Rated value	W	18,500
• at 400 V / at 3-phase root switching / at 40 °C		
• Rated value	W	30,000
yielded mechanical performance [hp] / for three-phase AC motor / at 200/208 V / at standard circuit / at 50 °C / Rated value	hp	10
Operating frequency		
• Rated value	Hz	50 ... 60
Relative negative tolerance / of the operating frequency	%	-10
Relative positive tolerance / of the operating frequency	%	10
Operating voltage / at standard circuit / Rated value	V	200 ... 460
Relative negative tolerance / of the operating voltage / at standard circuit	%	-15
Relative positive tolerance / of the operating voltage / at standard circuit	%	10
Operating voltage / at 3-phase root switching / Rated value	V	200 ... 460
Relative negative tolerance / of the operating voltage / at 3-phase root switching	%	-15
Relative positive tolerance / of the operating voltage / at 3-phase root switching	%	10
Minimum load in % of I_M	%	8
Adjustable motor current / for motor overload protection / minimum rated value	A	7
Continuous operating current in % of I_e / at 40 °C	%	115
Active power loss / at operating current / at 40 °C / during operation / typical	W	10
Control electronics:		
Type of voltage / of the control supply voltage		AC
Control supply voltage frequency / 1 / Rated value	Hz	50

Control supply voltage frequency / 2 / Rated value	Hz	60
Relative negative tolerance / of the control supply voltage frequency	%	-10
Relative positive tolerance / of the control supply voltage frequency	%	10
Control supply voltage / 1		
• with AC / at 50 Hz	V	230
• with AC / at 60 Hz	V	230
Relative negative tolerance / of the control supply voltage / with AC / at 60 Hz	%	-15
Relative positive tolerance / of the control supply voltage / with AC / at 60 Hz	%	10
Display version / for fault signal		Display

Mechanical design:

Width	mm	170
Height	mm	192
Depth	mm	270
Mounting type		screw fixing
mounting position		bei senkrechter Montageebene +/-90° drehbar, bei senkrechter Montageebene +/- 22,5° nach vorne und hinten kippbar
Spacing required		
• with side-by-side mounting	mm	100
• with side-by-side mounting	mm	5
• with side-by-side mounting	mm	75
Installation altitude / at height above sea level	m	5,000
Cable length / maximum	m	500
Number of poles / for main current circuit		3

Electrical connections:

Design of the electrical connection		
• for main current circuit		box terminals
• for auxiliary and control current circuit		spring-loaded terminals
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		3
Number of CO contacts / for auxiliary contacts		1
Type of connectable conductor cross-section / for main contacts / for box terminal / using the front clamping point		
• solid		2.5 ... 16 mm ²
• finely stranded / with core end processing		2.5 ... 35 mm ²
• finely stranded / without core end processing		4 ... 50 mm ²
• stranded		4 ... 70 mm ²

Type of connectable conductor cross-section / for main contacts / for box terminal / using the back clamping point <ul style="list-style-type: none"> • solid • finely stranded / with core end processing • finely stranded / without core end processing • stranded 		2,5 ... 16 mm ² 2.5 ... 50 mm ² 10 ... 50 mm ² 10 ... 70 mm ²
Type of connectable conductor cross-section / for main contacts / for box terminal / using both clamping points <ul style="list-style-type: none"> • solid • finely stranded / with core end processing • finely stranded / without core end processing • stranded 		2x (2.5 ... 16 mm ²) 2x (2.5 ... 35 mm ²) 2x (4 ... 35 mm ²) 2x (4 ... 50 mm ²)
Type of connectable conductor cross-section / for AWG conductors / for main contacts / for box terminal <ul style="list-style-type: none"> • using the back clamping point • using the front clamping point • using both clamping points 		10 ... 2/0 10 ... 2/0 2x (10 ... 1/0)
Type of connectable conductor cross-section <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> • solid • finely stranded / with core end processing • for AWG conductors / for auxiliary contacts 		2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (24 ... 16)

Ambient conditions:

Ambient temperature <ul style="list-style-type: none"> • during operation • during storage 	/ °C °C	60 -25 ... +80
Derating temperature	°C	40
Protection class IP		IP00

Certificates/approvals:

General Product Approval**EMC****Declaration of
Conformity****Test Certificates**[Special Test
Certificate](#)[Type Test
Certificates/Test
Report](#)**Shipping Approval****other**[Environmental
Confirmations](#)**UL/CSA ratings****yielded mechanical performance [hp] / for three-phase AC
motor**




- at 220/230 V / at standard circuit
 - at 50 °C / Rated value
- at 460/480 V / at standard circuit
 - at 50 °C / Rated value
- at 200/208 V / at 3-phase root switching / at 50 °C / Rated value
- at 220/230 V / at 3-phase root switching / at 50 °C / Rated value
- at 460/480 V / at 3-phase root switching / at 50 °C / Rated value


hp	10
hp	20
hp	15
hp	20
hp	40

Contact rating / of the auxiliary contacts / acc. to UL

B300 / R300

Further information:**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**CAX-Online-Generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3RW4423-3BC44/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RW4423-3BC44

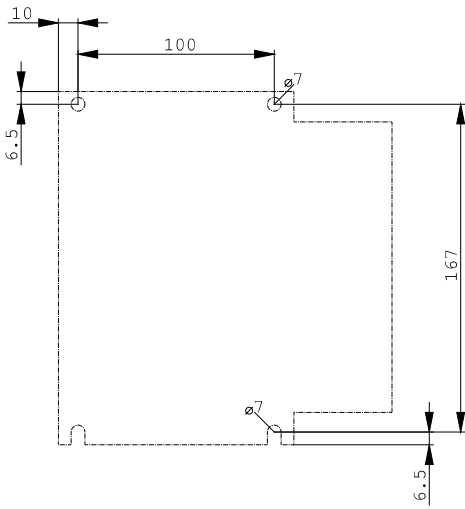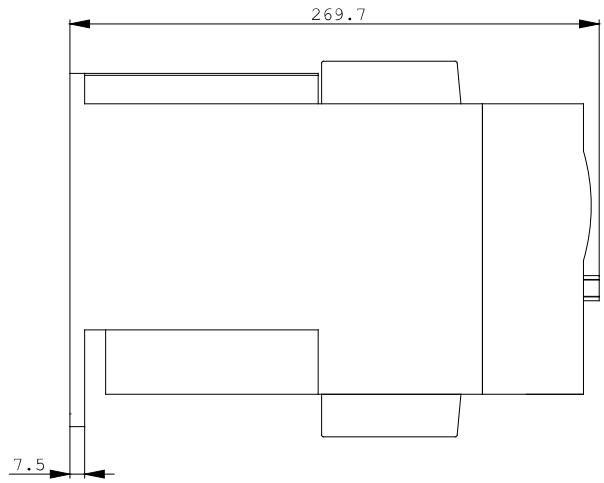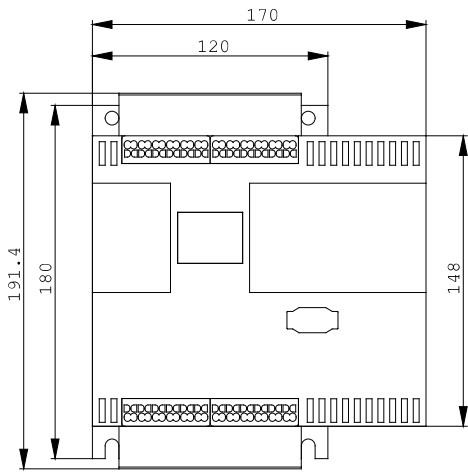

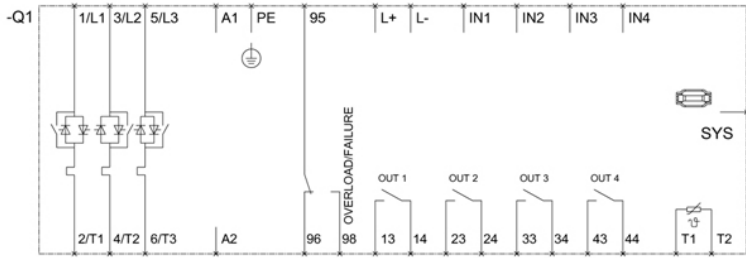

last change:

Sep 29, 2014