



OVERLOAD RELAY 50...200 A FOR MOTOR PROTECTION SIZE S6, CLASS 10 MOUNT. ONTO CONT./ STAND-ALONE MAIN CIRCUIT: BAR CONNECTION AUX. CIRCUIT: SPRINGLOAD. TERM. MANUAL-AUTOMATIC-RESET

product brand name	SIRIUS
Product designation	solid-state overload relay
<b>General technical data:</b>	
Active power loss total typical	0.05 W
Insulation voltage	1 000 V
<ul style="list-style-type: none"> <li>with degree of pollution 3 Rated value</li> </ul>	
Surge voltage resistance Rated value	8 kV
Size of contactor can be combined company-specific	S6
Type of assignment	2
Protection class IP	IP20
<ul style="list-style-type: none"> <li>on the front</li> </ul>	
Type of protection	PTB 06 ATEX 3001 Ex II (2) GD
Equipment marking	
<ul style="list-style-type: none"> <li>acc. to DIN EN 61346-2</li> </ul>	F
<ul style="list-style-type: none"> <li>acc. to DIN EN 81346-2</li> </ul>	F
<b>Main circuit:</b>	
Number of poles for main current circuit	3
Adjustable response value current of the current-dependent overload release	50 ... 200 A
Operating voltage	1 000 V
<ul style="list-style-type: none"> <li>at AC-3 Rated value maximum</li> </ul>	
<b>Auxiliary circuit:</b>	
Number of NC contacts	1
<ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>	

<b>Number of NO contacts</b>	
• for auxiliary contacts	1
<b>Number of CO contacts</b>	
• for auxiliary contacts	0
<b>Operating current of the auxiliary contacts at AC-15</b>	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
<b>Operating current of the auxiliary contacts at DC-13</b>	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A

<b>Protective and monitoring functions:</b>	
<b>Trip class</b>	CLASS 10

<b>Short-circuit:</b>	
<b>Design of the fuse link</b>	
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 6 A

<b>Installation/ mounting/ dimensions:</b>	
<b>mounting position</b>	any
<b>Mounting type</b>	direct mounting / stand-alone installation
<b>Height</b>	119 mm
<b>Width</b>	120 mm
<b>Depth</b>	155 mm
<b>Required spacing</b>	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	6 mm
— downwards	0 mm

• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	6 mm

#### Connections/ Terminals:

<b>Product function</b>	
• removable terminal for auxiliary and control circuit	Yes
<b>Type of electrical connection</b>	
• for main current circuit	busbar connection
• for auxiliary and control current circuit	spring-loaded terminals
<b>Type of connectable conductor cross-section</b>	
• for auxiliary contacts	
— solid	2x (0.25 ... 1.5 mm <sup>2</sup> )
— finely stranded with core end processing	2x (0.25 ... 1.5 mm <sup>2</sup> )
• for AWG conductors for auxiliary contacts	2x (24 ... 16)

#### Safety related data:

<b>Protection against electrical shock</b>	finger-safe with cover
--	------------------------

#### Mechanical data:

<b>Size of overload relay</b>	S6
-------------------------------	----

#### Ambient conditions:

<b>Installation altitude at height above sea level maximum</b>	2 000 m
<b>Ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
<b>Relative humidity during operation</b>	100 %

#### Electromagnetic compatibility:

<b>Conducted interference due to burst acc. to IEC 61000-4-4</b>	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
<b>Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5</b>	2 kV (line to earth) corresponds to degree of severity 3
<b>Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5</b>	1 kV (line to line) corresponds to degree of severity 3
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge

#### Certificates/ approvals:

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------	-------------------	-------------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Shipping Approval	other
-------------------	-------



[Environmental Confirmations](#)

[other](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB20561FF2>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB20561FF2>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB20561FF2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB20561FF2&lang=en)

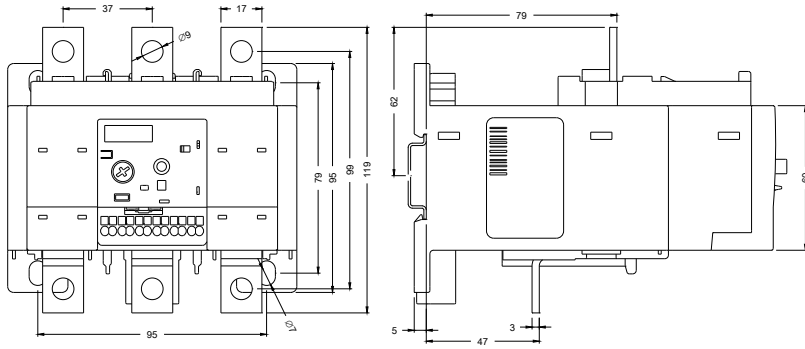

**last modified:**

14.05.2015