



CONTACTOR, AC-3, 4KW/400V, 2NO+2NC, AC 230V 50HZ, 3-POLE, SZ S0 SCREW TERMINAL REMOVABLE AUX. SWITCH

|   |                            |
|---|----------------------------|
| product brand name  | SIRIUS                     |
| Product designation   | 3RT2 contactor             |
| <b>General technical data:</b>  |                            |
| Size of contactor   | S0                         |
| Product expansion   | No                         |
| <ul style="list-style-type: none"> <li>function module for communication</li> <li>Auxiliary switch</li> </ul>   | No                         |
| Insulation voltage  | 690 V                      |
| <ul style="list-style-type: none"> <li>Rated value</li> </ul>   | 690 V                      |
| Surge voltage resistance Rated value  | 6 kV                       |
| maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1  | 400 V                      |
| Protection class IP   | IP20                       |
| <ul style="list-style-type: none"> <li>on the front</li> <li>of the terminal</li> </ul>   | IP20                       |
| Degree of pollution   | 3                          |
| Shock resistance  |                            |
| <ul style="list-style-type: none"> <li>at rectangular impulse                             <ul style="list-style-type: none"> <li>at AC</li> </ul> </li> <li>with sine pulse                             <ul style="list-style-type: none"> <li>at AC</li> </ul> </li> </ul> | 7,5g / 5 ms, 4,7g / 10 ms  |
|   | 11,8g / 5 ms, 7,4g / 10 ms |
| Mechanical service life (switching cycles)  |                            |
| <ul style="list-style-type: none"> <li>of the contactor typical</li> <li>of the contactor with added electronics-compatible auxiliary switch block typical</li> </ul>   | 10 000 000                 |
|   | 5 000 000                  |

|  |            |
|--|------------|
| <ul style="list-style-type: none"> <li>• of the contactor with added auxiliary switch block typical</li> </ul> | 10 000 000 |
|--|------------|

#### Ambient conditions:

|  |                |
|--|----------------|
| <b>Installation altitude at height above sea level maximum</b>       | 2 000 m        |
| <b>Ambient temperature</b>   |                |
| <ul style="list-style-type: none"> <li>• during operation</li> </ul> | -25 ... +60 °C |
| <ul style="list-style-type: none"> <li>• during storage</li> </ul>   | -55 ... +80 °C |

#### Main circuit:

|  |   |
|--|---|
| <b>Number of NO contacts for main contacts</b>   | 3                                       |
| <b>Number of NC contacts for main contacts</b>   | 0                                       |
| <b>Operating voltage</b>   |   |
| <ul style="list-style-type: none"> <li>• at AC-3 Rated value maximum</li> </ul>  | 690 V                                   |
| <b>Operating current</b>   |   |
| <ul style="list-style-type: none"> <li>• at AC-1 at 400 V <ul style="list-style-type: none"> <li>— at ambient temperature 40 °C Rated value</li> </ul> </li> </ul>   | 40 A                                    |
| <ul style="list-style-type: none"> <li>• at AC-1 up to 690 V <ul style="list-style-type: none"> <li>— at ambient temperature 40 °C Rated value</li> <li>— at ambient temperature 60 °C Rated value</li> </ul> </li> </ul>  | 40 A<br>35 A                            |
| <ul style="list-style-type: none"> <li>• at AC-2 at 400 V Rated value</li> </ul>   | 9 A                                     |
| <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V Rated value</li> <li>— at 500 V Rated value</li> <li>— at 690 V Rated value</li> </ul> </li> </ul>  | 9 A<br>9 A<br>9 A                       |
| <b>Connectable conductor cross-section in main circuit at AC-1</b>   |   |
| <ul style="list-style-type: none"> <li>• at 60 °C minimum permissible</li> </ul>   | 10 mm <sup>2</sup>                      |
| <ul style="list-style-type: none"> <li>• at 40 °C minimum permissible</li> </ul>   | 10 mm <sup>2</sup>                      |
| <b>Operating current for ≥ 200000 operating cycles at AC-4</b>   |   |
| <ul style="list-style-type: none"> <li>• at 400 V Rated value</li> </ul>   | 4.1 A                                   |
| <ul style="list-style-type: none"> <li>• at 690 V Rated value</li> </ul>   | 3.3 A                                   |
| <b>Operating current</b>   |   |
| <ul style="list-style-type: none"> <li>• with 1 current path at DC-1 <ul style="list-style-type: none"> <li>— at 24 V Rated value</li> <li>— at 110 V Rated value</li> <li>— at 220 V Rated value</li> <li>— at 440 V Rated value</li> <li>— at 600 V Rated value</li> </ul> </li> </ul> | 35 A<br>4.5 A<br>1 A<br>0.4 A<br>0.25 A |
| <ul style="list-style-type: none"> <li>• with 2 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V Rated value</li> <li>— at 110 V Rated value</li> </ul> </li> </ul>  | 35 A<br>35 A                            |

|  |         |
|--|---------|
| — at 220 V Rated value                           | 5 A     |
| — at 440 V Rated value                           | 1 A     |
| — at 600 V Rated value                           | 0.8 A   |
| • with 3 current paths in series at DC-1         |         |
| — at 24 V Rated value                            | 35 A    |
| — at 110 V Rated value                           | 35 A    |
| — at 220 V Rated value                           | 35 A    |
| — at 440 V Rated value                           | 2.9 A   |
| — at 600 V Rated value                           | 1.4 A   |
| <b>Operating current</b>                         |         |
| • with 1 current path at DC-3 at DC-5            |         |
| — at 24 V Rated value                            | 20 A    |
| — at 110 V Rated value                           | 2.5 A   |
| — at 220 V Rated value                           | 1 A     |
| — at 440 V Rated value                           | 0.09 A  |
| — at 600 V Rated value                           | 0.06 A  |
| • with 2 current paths in series at DC-3 at DC-5 |         |
| — at 110 V Rated value                           | 15 A    |
| — at 220 V Rated value                           | 3 A     |
| — at 24 V Rated value                            | 35 A    |
| — at 440 V Rated value                           | 0.27 A  |
| — at 600 V Rated value                           | 0.16 A  |
| • with 3 current paths in series at DC-3 at DC-5 |         |
| — at 110 V Rated value                           | 35 A    |
| — at 220 V Rated value                           | 10 A    |
| — at 24 V Rated value                            | 35 A    |
| — at 440 V Rated value                           | 0.6 A   |
| — at 600 V Rated value                           | 0.6 A   |
| <b>Operating power</b>                           |         |
| • at AC-1  |         |
| — at 230 V Rated value                           | 13.3 kW |
| — at 230 V at 60 °C Rated value                  | 13.3 kW |
| — at 400 V Rated value                           | 23 kW   |
| — at 400 V at 60 °C Rated value                  | 23 kW   |
| — at 690 V Rated value                           | 40 kW   |
| — at 690 V at 60 °C Rated value                  | 40 kW   |
| • at AC-2 at 400 V Rated value                   | 4 kW    |
| • at AC-3  |         |
| — at 230 V Rated value                           | 2.2 kW  |
| — at 400 V Rated value                           | 4 kW    |
| — at 690 V Rated value                           | 7.5 kW  |

|  |           |
|--|-----------|
| <b>Operating power for <math>\geq 200000</math> operating cycles at AC-4</b>                     |           |
| • at 400 V Rated value   | 2 kW      |
| • at 690 V Rated value   | 2.5 kW    |
| <b>Thermal short-time current restricted to 10 s</b>   | 80 A      |
| <b>Active power loss at AC-3 at 400 V for rated value of the operating current per conductor</b> | 0.4 W     |
| <b>No-load switching frequency</b>   |           |
| • at AC  | 5 000 1/h |
| <b>Operating frequency</b>   |           |
| • at AC-1 maximum  | 1 000 1/h |
| • at AC-2 maximum  | 1 000 1/h |
| • at AC-3 maximum  | 1 000 1/h |
| • at AC-4 maximum  | 300 1/h   |

#### Control circuit/ Control:

|   |              |
|---|--------------|
| <b>Type of voltage of the control supply voltage</b>                                      | AC           |
| <b>Control supply voltage at AC</b>   |              |
| • at 50 Hz Rated value  | 230 V        |
| <b>Operating range factor control supply voltage rated value of the magnet coil at AC</b> |              |
| • at 50 Hz  | 0.8 ... 1.1  |
| <b>Apparent pick-up power of the magnet coil at AC</b>                                    |              |
| • at 50 Hz  | 65 V·A       |
| <b>Inductive power factor with closing power of the coil</b>                              |              |
| • at 50 Hz  | 0.82         |
| <b>Apparent holding power of the magnet coil at AC</b>                                    |              |
| • at 50 Hz  | 7.6 V·A      |
| <b>Inductive power factor with the holding power of the coil</b>                          |              |
| • at 50 Hz  | 0.25         |
| <b>Closing delay</b>  |              |
| • at AC   | 9 ... 38 ms  |
| <b>Arcing time</b>  | 10 ... 10 ms |
| <b>Residual current of the electronics for control with signal &lt;0&gt;</b>              |              |
| • at AC at 230 V maximum permissible  | 6 mA         |
| • at DC at 24 V maximum permissible   | 16 mA        |

#### Auxiliary circuit:

|                              |   |
|------------------------------|---|
| <b>Number of NC contacts</b> |   |
| • for auxiliary contacts     |   |
| — instantaneous contact      | 2 |
| <b>Number of NO contacts</b> |   |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— instantaneous contact</li> </ul> </li> </ul>   | 2  |
| Operating current at AC-12 maximum  | 10 A   |
| <b>Operating current at AC-15</b>   |  |
| <ul style="list-style-type: none"> <li>• at 230 V Rated value</li> <li>• at 400 V Rated value</li> <li>• at 500 V Rated value</li> <li>• at 690 V Rated value</li> </ul>  | <p>6 A</p> <p>3 A</p> <p>2 A</p> <p>1 A</p>  |
| <b>Operating current at DC-12</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V Rated value</li> <li>• at 48 V Rated value</li> <li>• at 60 V Rated value</li> <li>• at 110 V Rated value</li> <li>• at 125 V Rated value</li> <li>• at 220 V Rated value</li> <li>• at 600 V Rated value</li> </ul> | <p>10 A</p> <p>6 A</p> <p>6 A</p> <p>3 A</p> <p>2 A</p> <p>1 A</p> <p>0.15 A</p>   |
| <b>Operating current at DC-13</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V Rated value</li> <li>• at 48 V Rated value</li> <li>• at 60 V Rated value</li> <li>• at 110 V Rated value</li> <li>• at 125 V Rated value</li> <li>• at 220 V Rated value</li> <li>• at 600 V Rated value</li> </ul> | <p>6 A</p> <p>2 A</p> <p>2 A</p> <p>1 A</p> <p>0.9 A</p> <p>0.3 A</p> <p>0.1 A</p> |
| <b>Contact reliability of the auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)                                    |

#### UL/CSA ratings:

|   |   |
|---|---|
| <b>Full-load current (FLA) for three-phase AC motor</b>   |   |
| <ul style="list-style-type: none"> <li>• at 480 V Rated value</li> <li>• at 600 V Rated value</li> </ul>  | <p>7.6 A</p> <p>9 A</p>   |
| <b>yielded mechanical performance [hp]</b>  |   |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V Rated value</li> <li>— at 230 V Rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V Rated value</li> <li>— at 220/230 V Rated value</li> <li>— at 460/480 V Rated value</li> <li>— at 575/600 V Rated value</li> </ul> </li> </ul> | <p>1 hp</p> <p>1 hp</p> <p>2 hp</p> <p>3 hp</p> <p>5 hp</p> <p>7.5 hp</p> |
| <b>Contact rating of the auxiliary contacts acc. to UL</b>  | A600 / Q600   |

#### Short-circuit:

**Design of the fuse link**

- for short-circuit protection of the main circuit
  - with type of assignment 1 required
  - with type of assignment 2 required
- for short-circuit protection of the auxiliary switch required

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 63 A  
 gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 25 A  
 fuse gL/gG: 10 A

#### Installation/ mounting/ dimensions:

|  |  |
|--|--|
| <b>mounting position</b>   | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022   |
| <ul style="list-style-type: none"> <li>• Side-by-side mounting</li> </ul>  | Yes  |
| <b>Height</b>  | 85 mm  |
| <b>Width</b>   | 45 mm  |
| <b>Depth</b>   | 141 mm   |
| <b>Required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting           <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts           <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts           <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 0 mm<br>0 mm<br>0 mm<br>0 mm<br>0 mm<br><br>0 mm<br>0 mm<br>0 mm<br>6 mm<br>0 mm<br><br>0 mm<br>0 mm<br>0 mm<br>0 mm<br>6 mm         |

#### Connections/ Terminals:

|   |   |
|---|---|
| <b>Type of electrical connection</b>  |   |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>                             | screw-type terminals<br>screw-type terminals                      |
| <b>Type of connectable conductor cross-section</b>  |   |
| <ul style="list-style-type: none"> <li>• for main contacts           <ul style="list-style-type: none"> <li>— single or multi-stranded</li> </ul> </li> </ul> | 2x (1 ... 2,5 mm <sup>2</sup> ), 2x (2,5 ... 10 mm <sup>2</sup> ) |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> <li>• for AWG conductors for main contacts</li> </ul>  | <p>2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>), 1x 10 mm<sup>2</sup></p> <p>2x (16 ... 12), 2x (14 ... 8)</p>  |
| <p><b>Type of connectable conductor cross-section</b></p> <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG conductors for auxiliary contacts</li> </ul> | <p>2x (0,5 ... 1,5 mm<sup>2</sup>), 2x (0,75 ... 2,5 mm<sup>2</sup>)</p> <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</p> <p>2x (20 ... 16), 2x (18 ... 14)</p> |

|   |                         |
|---|-------------------------|
| <b>Safety related data:</b>   |                         |
| <b>B10 value with high demand rate acc. to SN 31920</b>   | 1 000 000               |
| <b>Proportion of dangerous failures</b>   |                         |
| <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> <li>• with high demand rate acc. to SN 31920</li> </ul>           | <p>40 %</p> <p>73 %</p> |
| <b>Product function</b>   |                         |
| <ul style="list-style-type: none"> <li>• Mirror contact acc. to IEC 60947-4-1</li> <li>• positively driven operation acc. to IEC 60947-5-1</li> </ul> | <p>Yes</p> <p>Yes</p>   |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>   | 20 y                    |

**Certificates/ approvals:**

|                          |     |                                       |                           |
|--------------------------|-----|---------------------------------------|---------------------------|
| General Product Approval | EMC | Functional Safety/Safety of Machinery | Declaration of Conformity |
|--------------------------|-----|---------------------------------------|---------------------------|



[Baumusterbescheinigung](#)



|                   |                   |
|-------------------|-------------------|
| Test Certificates | Shipping Approval |
|-------------------|-------------------|

[Typprüfbescheinigung/Werkszeugnis](#)

[spezielle Prüfbescheinigungen](#)



|                   |       |
|-------------------|-------|
| Shipping Approval | other |
|-------------------|-------|



[Bestätigungen](#)

[Umweltbestätigung](#)

|       |
|-------|
| other |
|-------|



### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RT20231AP04>



**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3RT20231AP04>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RT20231AP04&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RT20231AP04&lang=en)



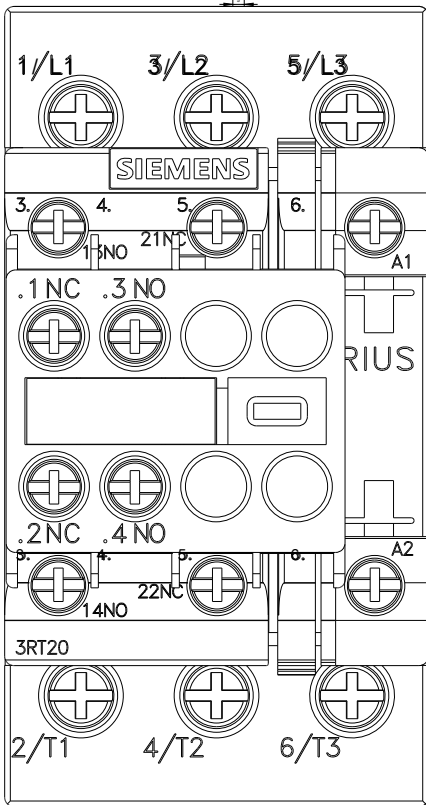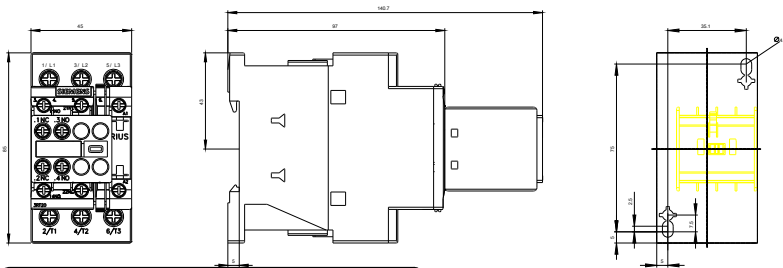

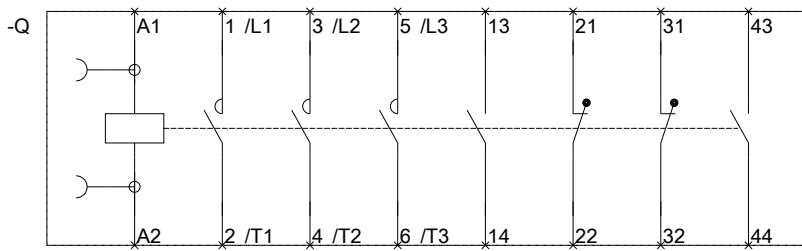

last modified:

29.06.2015