

PIN BUSBAR, 16 SQMM CONNECTION: 2X(1-PHASE+HS/FS) SAFE-TO-TOUCH

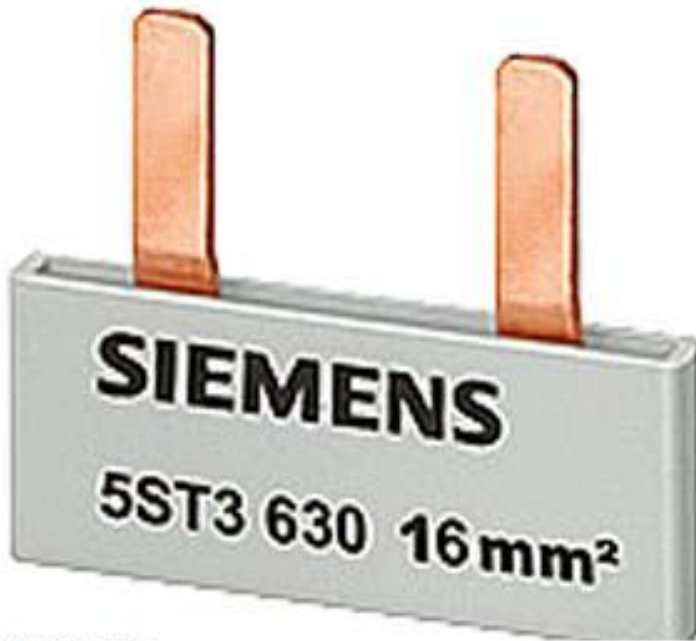


Figure similar

Model		
product brand name		SENTRON
Product designation		Pin busbar
Design of the product		16mm ² ,2X(1PH+HS/FS)
Busbar design		laminated
General technical data		
Surface processing / tin-plated		No
Main circuit		
Operating current / Rated value	A	80
Product details		
Product property / flexible		No
Mechanical Design		
Width	mm	3.8
Length	mm	40
Thickness / of busbar	mm	15.2
Net weight	g	7.88
Material / of the busbar		SF-Cu F 24



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5ST3633>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5ST3633/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5ST3633

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

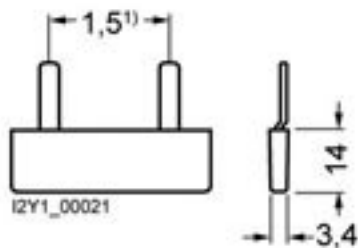

¹⁾ Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last modified:

12.10.2015