

SOLID-STATE, TIME-DELAYED AUXILIARY SWITCH
BLOCK SETTING RANGE 1.5 S...30 S, AC 200...240 V,
2NO, STAR-DELTA FUNCTION, FOR MOUNTING
ONTO CONTACTORS, SIZE SO...S12



Figure similar

General technical data:		
product brand name		SIRIUS
Product designation		auxiliary switch
Size of contactor can be combined company-specific		S0 ... S12
Product function		
• star-delta circuit		Yes
• at the relay outputs Switchover delayed/without delay		No
Product component semi-conductor output		No
Product expansion		
• optional remote control		No
• required remote control		No
Adjustable time	s	1.5 ... 30
Ambient temperature during operation	°C	-25 ... +60
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Equipment marking acc. to DIN EN 61346-2		K
Switching Function:		
Switching function		

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
--------------------------	---------------------------------------	---------------------------



[Baumusterbescheinigung](#)



Test Certificates	Shipping Approval
-------------------	-------------------

[spezielle Prüfbescheinigungen](#)



Shipping Approval	other
-------------------	-------



[Umweltbestätigung](#)

[Bestätigungen](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT19262GD51>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT19262GD51>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT19262GD51&lang=en

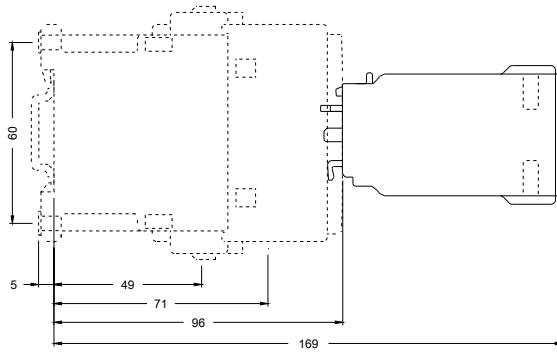

last modified:

30.09.2015