

SILIZED FUSE LINK 400 V
GR,SEMICOND.PROTECT.GR.D02 20 A



Figure similar

Model		
product brand name		SETRON
Product designation		Semiconductor fuse
General technical data		
Size of fuse system / acc. to DIN EN 60269-1		D02
Operating class of the fuse link		gR (complete converter protection)
Dissipation		
Power loss [W]		
<ul style="list-style-type: none"> for rated value of the current / at AC / in hot operating state / per pole 	W	8.1
Main circuit		
Operating voltage / rated value	V	400
Operating current / rated value	A	20
Appearance		
Color coding of the fuse link		others
Net weight	g	13
Certificates		

Equipment marking

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

F
F

General Product Approval

other

EAC

[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SE1320>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE1320/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5SE1320

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

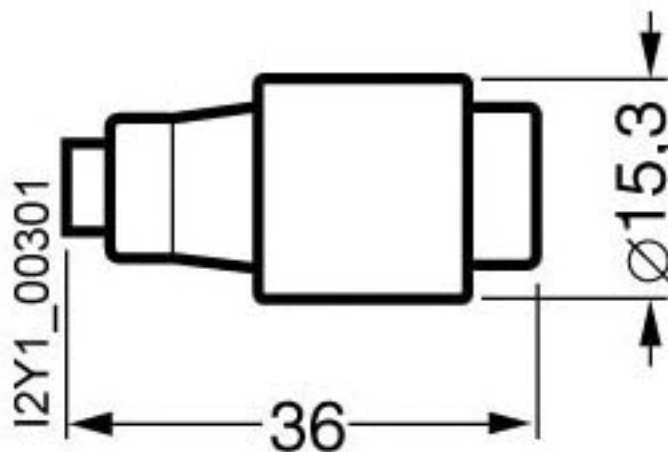

last modified:

11.12.2015