# SIEMENS

## Product data sheet

## 3TH4262-0AP0



CONTACTOR RELAY 62E EN 50 011 6NO+2NC, SCREW TERMINALS AC OPERATION AC 230/220V 50HZ, 276/264V 60HZ

General details:					
Size of the contactor		0			
Ambient temperature	-				
• during operating	°C	-25 +55			
Protection class IP / on the front		IP20			
Item designation					
<ul> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		К			
according to DIN EN 61346-2		К			
according to DIN EN 81346-2		К			
Control circuit:					
Type of voltage / of the controlled supply voltage		AC			
Control supply voltage frequency					
• 1	Hz	50			
• 2	Hz	60			
Control supply voltage					
• at 50 Hz / at AC / rated value	V	230			
• at 60 Hz / at AC / rated value	V	277			
Auxiliary circuit:					

Operating current /	at AC-15				
• at 230 V / rated value		А	10		
• at 400 V / rated	value		А	6	
Identification number and letter for switching elements			62 E		
Number of NC contacts / for auxiliary contacts			2		
lagging switching			0		
delayed switching			0		
asynchronous switching			0		
Number of NO contacts / for auxiliary contacts			6		
leading switching			0		
delayed switching			0		
asynchronous switching			0		
Number of changeover contacts / for auxiliary contacts				0	
Connection type:	:				
Design of the electrical connection / for auxiliary and control current circuit				screw-	type terminals
Mechanical desig	yn:				
Type of mounting			screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022		
Width			mm	45	
Height		mm	78		
Depth			mm	102	
Certificates/appr	ovals:				
General Product	Approval				Functional Safety / Safety of Machinery
	CSA	EHC			Type Examination
Test Certificates					
other	Special Test Certificate	<u>Type Test</u> Certificates/Test Report			
Shipping Approva	al				
	GL	Lloyd's Register	RMRS		
other					
Declaration of Conformity	other	Environmental Confirmations			
Safety:					

Protection against electrical shock		finger-safe
B10 value / with high demand rate		
according to SN 31920		1,000,000
• note		With 0.3 x le
T1 value / for proof test interval or service life / according to IEC 61508	а	20

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall


#### Cax online generator


http://www.siemens.com/cax

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3TH4262-0AP0/all

\_\_\_\_\_

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3TH4262-0AP0



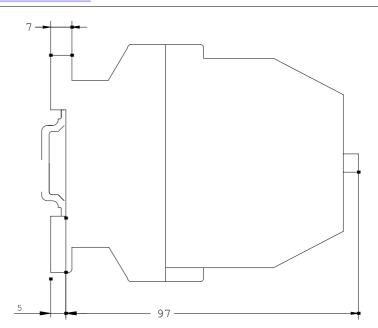

last change:

Feb 25, 2013