

PLUG-IN RELAY COMPACT UNIT DC 24V, 2 CO
CONTACT LED MODULE RED STANDARD PLUG-IN
SOCKET SCREW TERMINAL



Figure similar

General technical data:

Type of voltage		DC
Control supply voltage		
• at DC rated value		
— minimum	V	24
— maximum	V	24
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		0
Number of CO contacts for auxiliary contacts		2
Operating current of auxiliary contacts		
• at AC-15		
— at 230 V	A	2.5
Design of the switching function positively driven		No
Switching behavior		monostable

Mechanical data:

Type of electrical connection		screw-type terminals
Design of the relay operating mechanism		poled
Product component Plug-in socket		Yes

Width	mm	15.5
Height	mm	71
Depth	mm	78

Certificates/ approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[Bestätigungen](#)

Further information

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=LZS:RT4A4L24>

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:RT4A4L24>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=LZS:RT4A4L24&lang=en

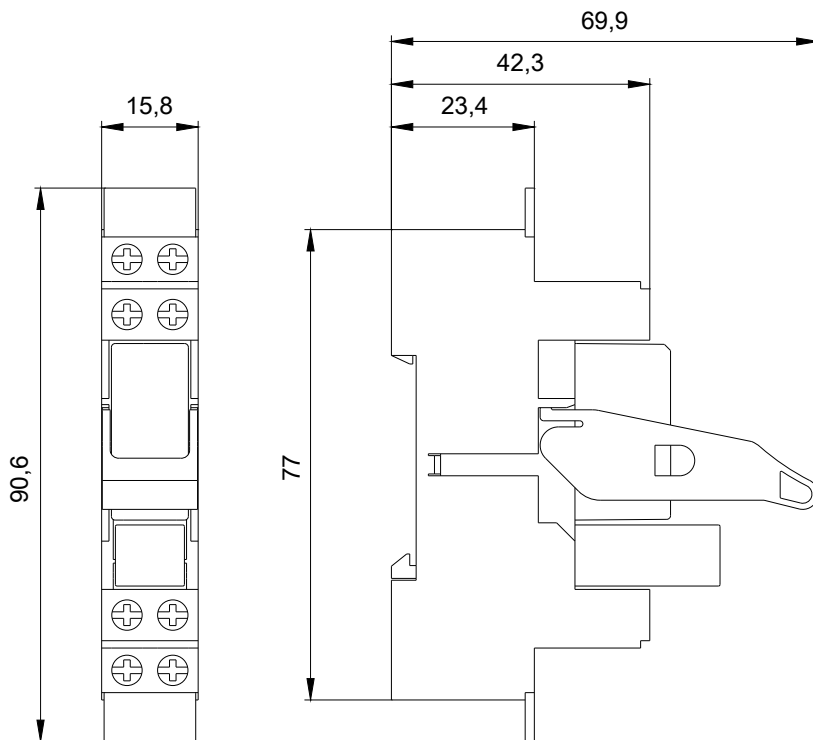

last modified:

01.06.2016