

PLUG-IN RELAY COMPACT UNIT 24V DC, 4 CO LED
MODULE RED SOCKET W. LOGIC ISOLATION PLUG-
IN TERMINAL (PUSH-IN)



Figure similar

General technical data:

Type of voltage		DC
Control supply voltage		
<ul style="list-style-type: none"> • at DC rated value <ul style="list-style-type: none"> — minimum — maximum 	V	24
	V	24
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		0
Number of CO contacts for auxiliary contacts		4
Operating current of auxiliary contacts		
<ul style="list-style-type: none"> • at DC-13 <ul style="list-style-type: none"> — at 24 V • at AC-15 <ul style="list-style-type: none"> — at 230 V 	A	4
	A	4
Design of the switching function positively driven		No
Switching behavior		monostable

Mechanical data:

Type of electrical connection		spring-loaded terminals
Design of the relay operating mechanism		poled
Product component Plug-in socket		Yes
Width	mm	28
Height	mm	79
Depth	mm	98

Certificates/ approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[Bestätigungen](#)

Further information

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=LZS:PT5D5L24>

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT5D5L24>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=LZS:PT5D5L24&lang=en

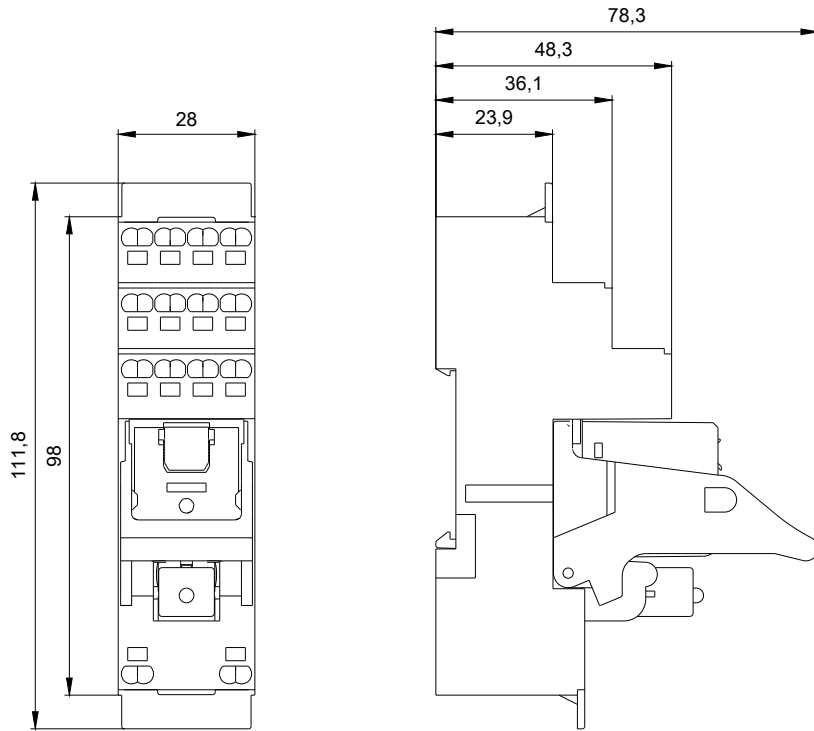

last modified:

W9.4444; LZS:PT2D5L24_ALL
 W9.3333; LZS:PT2D5L24_ALL
 08/12/2016