


Online Catalogue

7.820.400.000 Straigh Connector, Male Thread M 16, for cable 5-9 mm

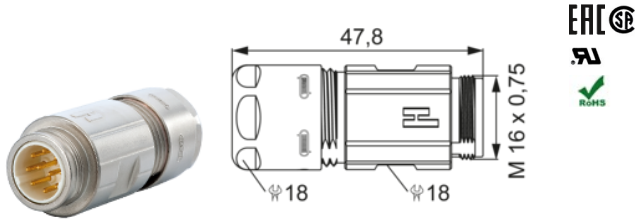

add to list

Contacts and inserts 22
 Assembly instruction page 35/36

Protection:	IP 67 / IP 69K per EN 60 529 (connected)	cable diameter	5 - 9 mm
Operating-Temperature:	-40 – 125 °C		
Mating cycles:	> 1000		
for cables mm:	2 – 11		
Housing material:	Aluminium alloy Copper-Zinc alloy Die Casting		
Housing surface:	other surface finishes nickel plated brass		
Inserts:	PBT Fire protection class V-0 Thermoplastic Polyamid PA 6 (Nylon 6/6)		
Contact material:	Copper-Zinc alloy		
Contact surface:	Nickel plated, Gold plated (0,25µm) Nickel		
characteristic of connection:	Crimp dip-solder (PCB)		
Seals / O-Rings:	Buna-N standard Viton (FPM)		