

SURGE SUPPRESSOR, VARISTOR WITH LED, AC 24...48V, DC 12...24V, FOR MOTOR CONTACTORS SZ S0,



| General technical data: | | |
|--|----|------------------|
| product brandname | | SIRIUS |
| Product designation | | surge suppressor |
| Size of contactor | | S0 |
| Design of the surge suppressor | | with varistor |
| Ambient temperature | | |
| <ul style="list-style-type: none"> during storage | °C | -40 ... +80 |
| <ul style="list-style-type: none"> during operation | °C | -25 ... +60 |

| Control circuit/ Control: | | |
|---|----|-------|
| Type of voltage of the control supply voltage | | AC/DC |
| Control supply voltage frequency | | |
| <ul style="list-style-type: none"> 1 rated value | Hz | 50 |
| <ul style="list-style-type: none"> 2 rated value | Hz | 60 |
| Control supply voltage 1 | | |
| <ul style="list-style-type: none"> at DC | | |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> Initial rated value | V | 12 |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> Final rated value | V | 24 |
| <ul style="list-style-type: none"> at AC | | |




| | | |
|--------------------------------|---|----|
| — at 50 Hz Initial rated value | V | 24 |
| — at 50 Hz Final rated value | V | 48 |
| — at 60 Hz Final rated value | V | 48 |
| — at 60 Hz Initial rated value | V | 24 |

Installation/ mounting/ dimensions:

| | | |
|-------------------|----|---------|
| Mounting position | | any |
| Mounting type | | clip-on |
| Width | mm | 30 |
| Height | mm | 19 |
| Depth | mm | 12 |

Certificates/ approvals:


| | | | |
|----------------------------|---------------------|--|--|
| Certificate of suitability | CE / UL / CSA / CCC | | |
|----------------------------|---------------------|--|--|

| General Product Approval | Declaration of Conformity | Test Certificates | Shipping Approval |
|--|--|--|---|
|  CSA  UR  EAC |  CE EG-Konf. | Special Test Certificate |  ABS |

Shipping Approval



| | | | | | |
|--|--|---|--|--|--|
|  BUREAU VERITAS BUREAU VERITAS |  GL GL |  Lloyd's Register LRS |  PRS PRS |  RINA RINA |  RMRS RMRS |
|--|--|---|--|--|--|


other

| other | Railway |
|--|-------------------------------------|
| Confirmation Environmental Confirmations | Vibration and Shock |
|  VDE | |

Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>
- Industry Mall (Online ordering system)
<http://www.siemens.com/industrymall>
- Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-1JJ00>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-1JJ00>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-1JJ00&lang=en

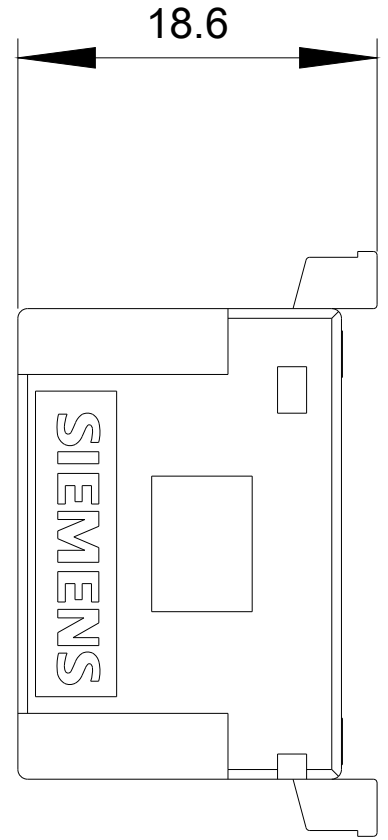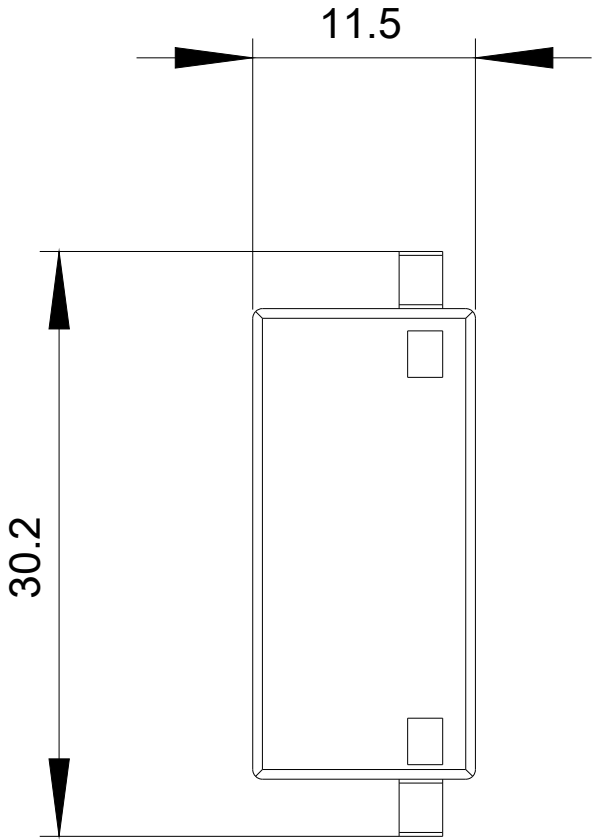

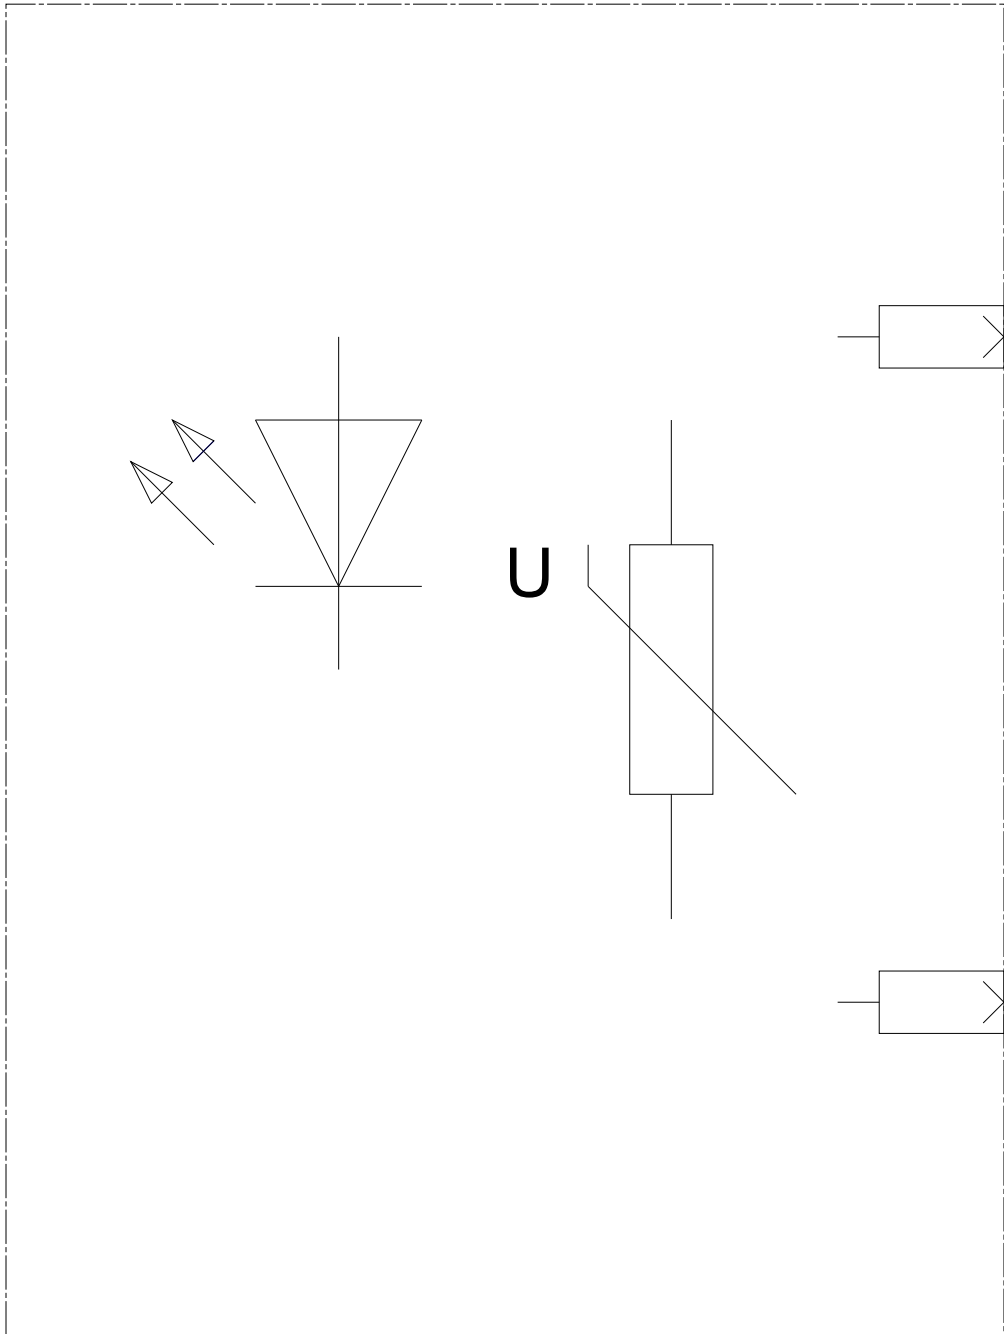

last modified:

06/09/2017