

INDICATOR LIGHT, 22MM, ROUND, PLASTIC, YELLOW, SMOOTH LENS, WITH HOLDER, LED MODULE, WITH INTEGRATED LED 24V AC/DC, SCREW TERMINAL



Figure similar

| | |
|--------------------------------------|---|
| product brandname | SIRIUS ACT |
| Product designation | Indicator lights |
| Product type designation | 3SU1 |
| Manufacturer's article number | <ul style="list-style-type: none"> • of supplied LED module 3SU1401-1BB30-1AA0 • of the supplied holder 3SU1500-0AA10-0AA0 • of supplied repeater 3SU1001-6AA30-0AA0 |

| Enclosure | |
|---------------------------------|---|
| Number of command points | 1 |

| Actuator | |
|--|---|
| Product extension optional Light source | Yes |
| Color | <ul style="list-style-type: none"> • of the actuating element Yellow |
| Material of the actuating element | plastic |
| Shape of the actuating element | round |
| Outer diameter of the actuating element | 29.45 mm |

| Front ring | |
|---|-----------------------------------|
| Product component front ring | No |
| Holder | |
| Material of the holder | Plastic |
| Display | |
| Number of LED modules | 1 |
| General technical data | |
| Product component | |
| • Light source | Yes |
| Insulation voltage | |
| • rated value | 320 V |
| Degree of pollution | 3 |
| Type of voltage | |
| • of the operating voltage | AC/DC |
| Surge voltage resistance rated value | 4 kV |
| Protection class IP | IP66, IP67, IP69(IP69K) |
| • of the terminal | IP20 |
| Degree of protection NEMA rating | NEMA 1, 2, 3, 3R, 4, 4X, 12 |
| Shock resistance | |
| • acc. to IEC 60068-2-27 | Sinusoidal half-wave 50 g / 11 ms |
| • for railway applications acc. to DIN EN 61373 | Category 1, Class B |
| Vibration resistance | |
| • acc. to IEC 60068-2-6 | 10 ... 500 Hz: 5g |
| • for railway applications acc. to DIN EN 61373 | Category 1, Class B |
| Equipment marking | |
| • acc. to DIN EN 61346-2 | P |
| • acc. to DIN EN 81346-2 | P |
| Main circuit | |
| Operating voltage | |
| • rated value | 24 V |
| Relative positive tolerance of the operating voltage | 20 % |
| Relative negative tolerance of the operating voltage | 20 % |
| Auxiliary circuit | |
| Number of NC contacts | |
| • for auxiliary contacts | 0 |
| Number of NO contacts | |
| • for auxiliary contacts | 0 |
| Number of CO contacts | |
| • for auxiliary contacts | 0 |
| Connections/Terminals | |

| | |
|---|------------------------------------|
| Type of electrical connection | |
| <ul style="list-style-type: none"> • of modules and accessories | Screw-type terminal |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • solid with core end processing | 2x (0.5 ... 0.75 mm ²) |
| <ul style="list-style-type: none"> • solid without core end processing | 2x (1.0 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • finely stranded without core end processing | 2x (1,0 ... 1,5 mm ²) |
| <ul style="list-style-type: none"> • at AWG conductors | 2x (18 ... 14) |
| Tightening torque of the screws in the bracket | 1 ... 1.2 N·m |
| Tightening torque | |
| <ul style="list-style-type: none"> • with screw-type terminals | 0.8 ... 0.9 N·m |

| | |
|----------------------------------|-------------------|
| Lamp | |
| Type of light source | LED |
| Color of the light source | yellow |
| Light intensity | 900 ... 1 400 mcd |

| | |
|--|---|
| Ambient conditions | |
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation | -25 ... +70 °C |
| <ul style="list-style-type: none"> • during storage | -40 ... +80 °C |
| Environmental category during operation acc. to IEC 60721 | 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted for all devices behind front panel) |

| | |
|--|----------------------|
| Installation/ mounting/ dimensions | |
| Mounting type | front panel mounting |
| <ul style="list-style-type: none"> • of modules and accessories | Front plate mounting |
| Height | 40 mm |
| Width | 30 mm |
| Shape of the installation opening | round |
| Mounting diameter | 22.3 mm |
| Positive tolerance of installation diameter | 0.4 mm |
| Mounting height | 11.8 mm |
| Installation width | 29.5 mm |
| Installation depth | 49.7 mm |

| |
|-------------------------------|
| Certificates/approvals |
|-------------------------------|

| General Product Approval | | | | Declaration of Conformity | Test Certificates |
|--|--|---|---|---|--|
|  CCC |  CSA |  UL |  |  EG-Konf. | Declaration of the Compliance with the order |

| Test Certificates | Shipping Approval | | | | |
|--|--|--|--|---|---|
| Special Test Certificate |  ABS |  LRS |  PRS |  RINA |  RMRS |

| other |
|------------------------------|
| Confirmation |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1102-6AA30-1AA0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1102-6AA30-1AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3SU1102-6AA30-1AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1102-6AA30-1AA0&lang=en



-P
24 V AC/DC

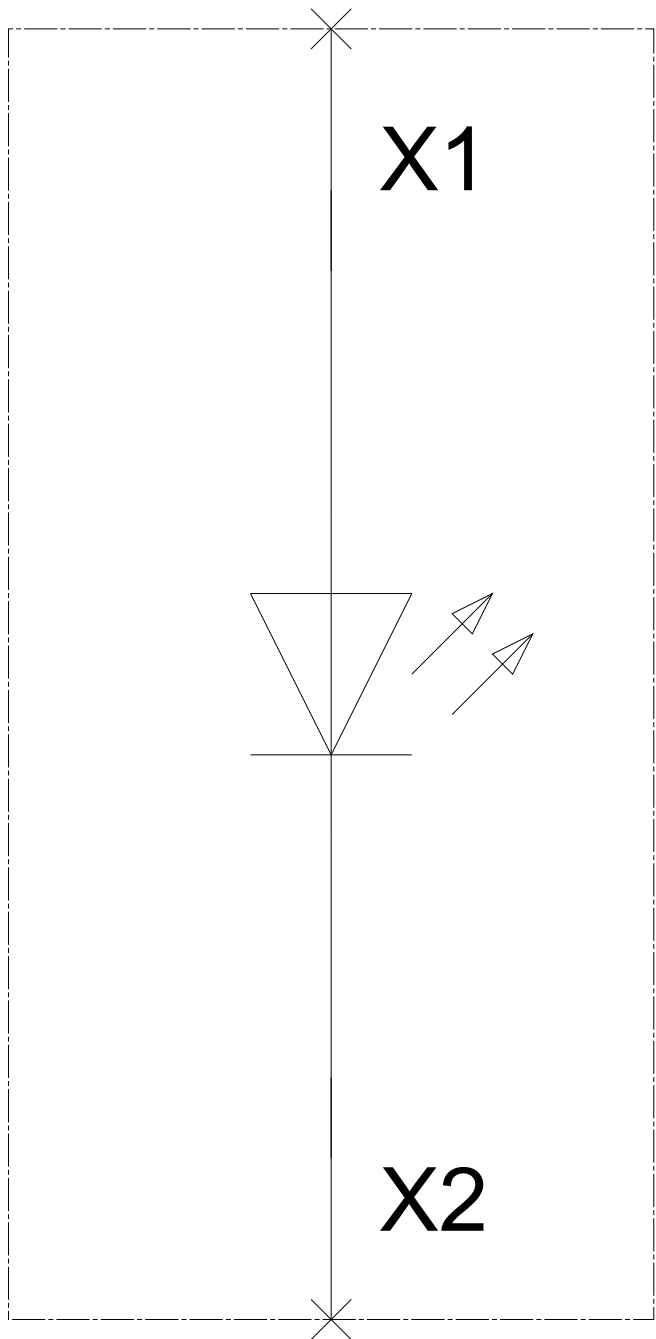

last modified:

06/20/2017