# SIEMENS

## **Product data sheet**

#### 3RS1000-1CK20



TEMPERATURE MONITORING RELAY FOR PT100, EXCEEDING OF 1 THRESH. VAL., WIDTH 22ND5 MM 0 C-200 C, 110-120/220-240V AC 1 NO + 1 NC, CLOSED-CIRC.PRINC. SCREW CONNECTION

## General technical details:

General technical details:			
Type of voltage		AC	
Supply voltage frequency			
• 1 / for auxiliary and control current circuit			
initial rated value	Hz	50	
final rated value	Hz	60	
• 1 / for AC / at 50 Hz / rated value	V	110	
• 1 / for AC / at 60 Hz / rated value	V	110	
• 2			
• for AC / at 60 Hz			
rated value	V	230	
• for AC / at 50 Hz			
rated value	V	230	
Number of measuring circuits		1	
Product function			
defect storage		No	
reset external		No	
Measurable temperature			
initial value	°C	0	
• final value	°C	200	

Reference code / according to DIN EN 61346-2		к
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		К
Ambient temperature		
during operating	°C	-25 +60

### Mechanical design:

Design of the electrical connection		
<ul> <li>for auxiliary and control current circuit</li> </ul>		screw-type terminals
• jumper socket		Yes
Design of the sensor / connectable		PT100 (resistance sensor)
Number of NC contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts		1
Number of changeover contacts / for auxiliary contacts		0
Width	mm	22.5
Height	mm	83
Depth	mm	91

## Certificates/approvals:







Test Certificates	other
Special Test	Declaration of
Certificate	Conformity

Environmental Confirmations

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

#### Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall


#### Cax online generator:

http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RS1000-1CK20/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RS1000-1CK20

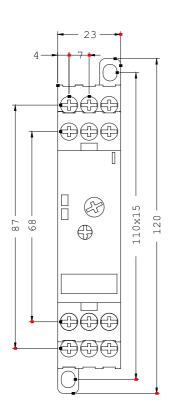

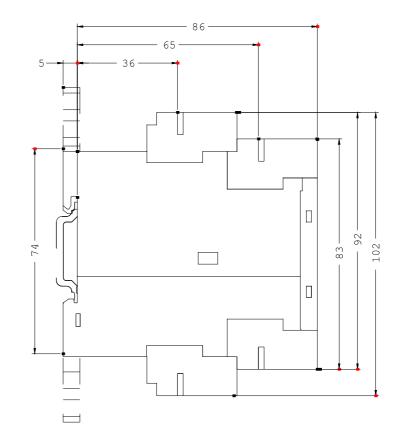

last change:

Jul 28, 2014