

Timing relay, electronic ansprechverzögert 1 change-over contact, 1 time range 0.5...10 s 12-240 V AC/DC at 50/60 Hz AC with LED, Screw terminal



Figure similar

Product brand name	SIRIUS
Product designation	timing relay
Design of the product	slow-operating
Product type designation	3RP25

General technical data	
Product component	
• Relay output	Yes
• semi-conductor output	No
Product extension required remote control	No
Product extension optional remote control	No
Power loss [W] total typical	2 W
Insulation voltage	
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	300 V
Test voltage for isolation test	2.5 kV
Degree of pollution	3

Surge voltage resistance rated value	4 000 V
Protection class IP	IP20
Shock resistance	
• acc. to IEC 60068-2-27	11g / 15 ms
Vibration resistance	
• acc. to IEC 60068-2-6	10 ... 55 Hz / 0.35 mm
Mechanical service life (switching cycles)	
• typical	10 000 000
Electrical endurance (switching cycles)	
• at AC-15 at 230 V typical	100 000
Adjustable time	0.5 ... 10 s
Relative setting accuracy relating to full-scale value	5 %
Thermal current	5 A
Recovery time	250 ms
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Reference code acc. to DIN EN 81346-2	K
Reference code acc. to DIN EN 61346-2	K
Relative repeat accuracy	1 %

Control circuit/ Control

Type of voltage of the control supply voltage	AC/DC
Control supply voltage 1 at AC	
• at 50 Hz	12 ... 240 V
• at 60 Hz	12 ... 240 V
Control supply voltage frequency 1	50 ... 60 Hz
Control supply voltage 1	
• at DC	12 ... 240 V
Operating range factor control supply voltage rated value at DC	
• initial value	0.85
• Full-scale value	1.1
Operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• Full-scale value	1.1
Operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.85
• Full-scale value	1.1
Inrush current peak	
• at 24 V	0.4 A
• at 240 V	5 A
Duration of inrush current peak	

- at 24 V
- at 240 V

0.3 ms

0.5 ms

Switching Function

Switching function	
• ON-delay	Yes
• ON-delay/instantaneous contact	No
• passing make contact	No
• passing make contact/instantaneous contact	No
• OFF delay	No
Switching function	
• flashing symmetrically starting with interval/instantaneous	No
• flashing symmetrically starting with interval	No
• flashing symmetrically starting with pulse/instantaneous	No
• flashing symmetrically starting with pulse	No
• flashing asymmetrically starting with interval	No
• flashing asymmetrically starting with pulse	No
Switching function	
• star-delta circuit with delay time	No
• star-delta circuit	No
Switching function with control signal	
• additive ON delay	No
• passing break contact	No
• passing break contact/instantaneous	No
• OFF delay	No
• OFF delay/instantaneous	No
• pulse delayed	No
• pulse delayed/instantaneous	No
• pulse-shaping	No
• pulse-shaping/instantaneous	No
• additive ON delay/instantaneous	No
• ON-delay/OFF-delay/instantaneous	No
• passing make contact	No
• passing make contact/instantaneous contact	No
Switching function of interval relay with control signal	
• retrotriggerable with deactivated control signal/instantaneous contact	No
• retrotriggerable with activated control signal	No
• retrotriggerable with activated control signal/instantaneous contact	No
• retriggerable with deactivated control signal	No

Short-circuit protection	
Design of the fuse link	fuse gL/gG: 4 A
<ul style="list-style-type: none"> for short-circuit protection of the auxiliary switch required 	
Auxiliary circuit	
Material of switching contacts	AgSnO2
Number of CO contacts	1
<ul style="list-style-type: none"> delayed switching 	
Operating current of auxiliary contacts at AC-15	3 A
<ul style="list-style-type: none"> at 24 V at 250 V 	
Operating current of auxiliary contacts at DC-13	1 A 0.2 A 0.1 A
<ul style="list-style-type: none"> at 24 V at 125 V at 250 V 	
Operating frequency with 3RT2 contactor maximum	
Contact reliability of auxiliary contacts	5 000 1/h
Contact rating of auxiliary contacts according to UL	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
Influence of the surrounding temperature	R300 / B300
Power supply influence	1% in the whole temperature range to the set runtime
Switching capacity current with inductive load	1% in the whole voltage range to the set runtime
Switching capacity current with inductive load	0.01 ... 3 A
Inputs/ Outputs	
Product function	No
<ul style="list-style-type: none"> at the relay outputs Switchover delayed/without delay non-volatile 	
Product function	No
Electromagnetic compatibility	
EMI immunity	EN 61000-6-2
<ul style="list-style-type: none"> acc. to IEC 61812-1 	
Conducted interference	2 kV network connection / 1 kV control connection 2 kV 1 kV
<ul style="list-style-type: none"> due to burst acc. to IEC 61000-4-4 due to conductor-earth surge acc. to IEC 61000-4-5 due to conductor-conductor surge acc. to IEC 61000-4-5 	
Field-bound parasitic coupling acc. to IEC 61000-4-3	
Electrostatic discharge acc. to IEC 61000-4-2	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge
Safety related data	
Protection against electrical shock	finger-safe
Type of insulation	Basic insulation

Category acc. to EN 954-1	none
---------------------------	------

Connections/Terminals

Product function	Yes
<ul style="list-style-type: none"> removable terminal for auxiliary and control circuit 	
Type of electrical connection	screw-type terminals
<ul style="list-style-type: none"> for auxiliary and control current circuit 	
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> solid 	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> finely stranded with core end processing 	1x (0.5 ... 4 mm ²), 2x (0.5 ... 1.5 mm ²)
<ul style="list-style-type: none"> at AWG conductors solid 	1x (20 ... 12), 2x (20 ... 14)
<ul style="list-style-type: none"> at AWG conductors stranded 	1x (20 ... 12), 2x (20 ... 14)
Connectable conductor cross-section	
<ul style="list-style-type: none"> solid 	0.5 ... 4 mm ²
<ul style="list-style-type: none"> finely stranded with core end processing 	0.5 ... 4 mm ²
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> solid 	20 ... 12
<ul style="list-style-type: none"> stranded 	20 ... 14
Tightening torque	0.6 ... 0.8 N·m
Design of the thread of the connection screw	M3

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
Height	100 mm
Width	17.5 mm
Depth	90 mm
Required spacing	
<ul style="list-style-type: none"> with side-by-side mounting <ul style="list-style-type: none"> forwards Backwards upwards downwards at the side 	0 mm
<ul style="list-style-type: none"> for grounded parts <ul style="list-style-type: none"> forwards Backwards upwards at the side downwards 	0 mm
<ul style="list-style-type: none"> for live parts 	0 mm

— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
Relative humidity	
• during operation	10 ... 95 %

Certificates/approvals

General Product Approval	EMC	Declaration of Conformity
---------------------------------	------------	----------------------------------



Test Certificates	Marine / Shipping
--------------------------	--------------------------

[Type Test Certificates/Test Report](#)



other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>


Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2511-1AW30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2511-1AW30>

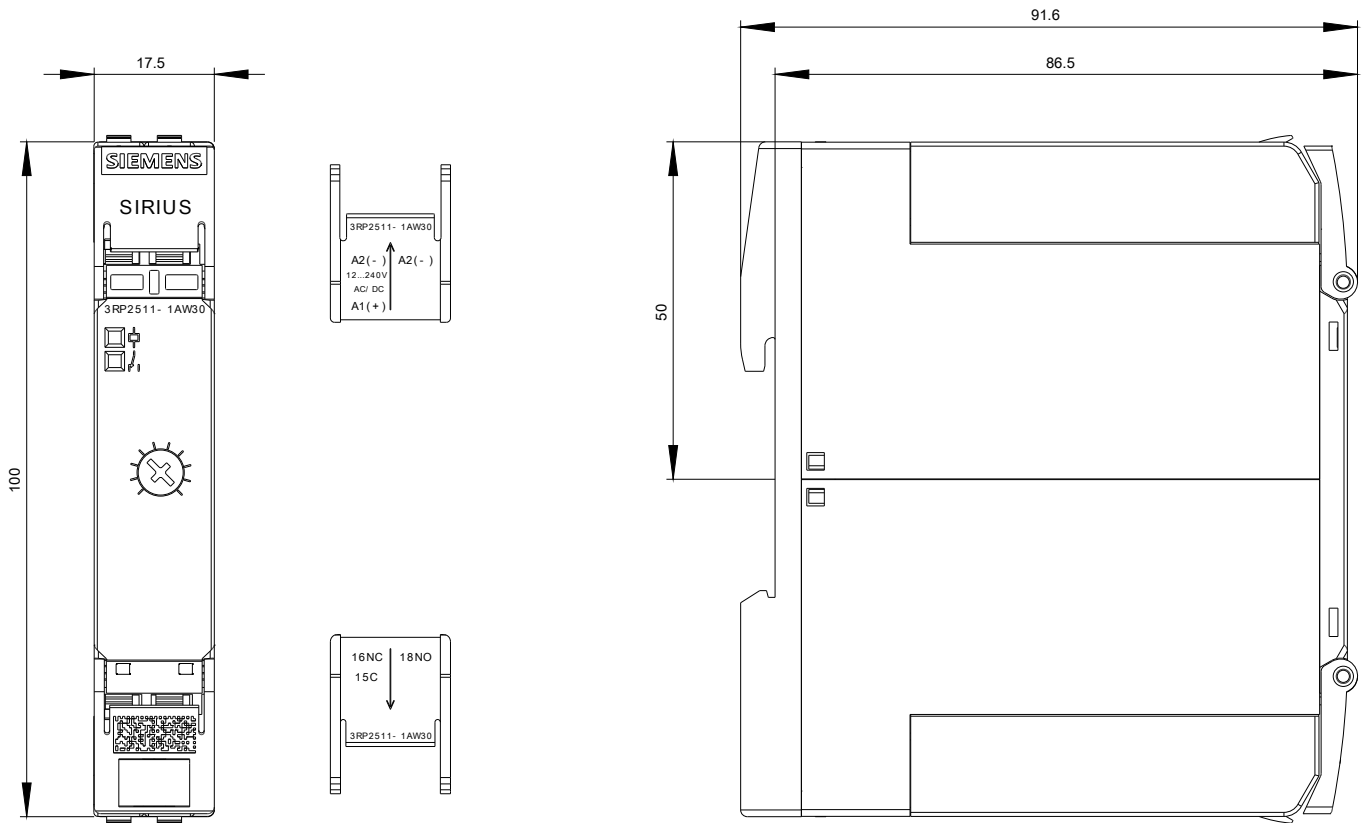

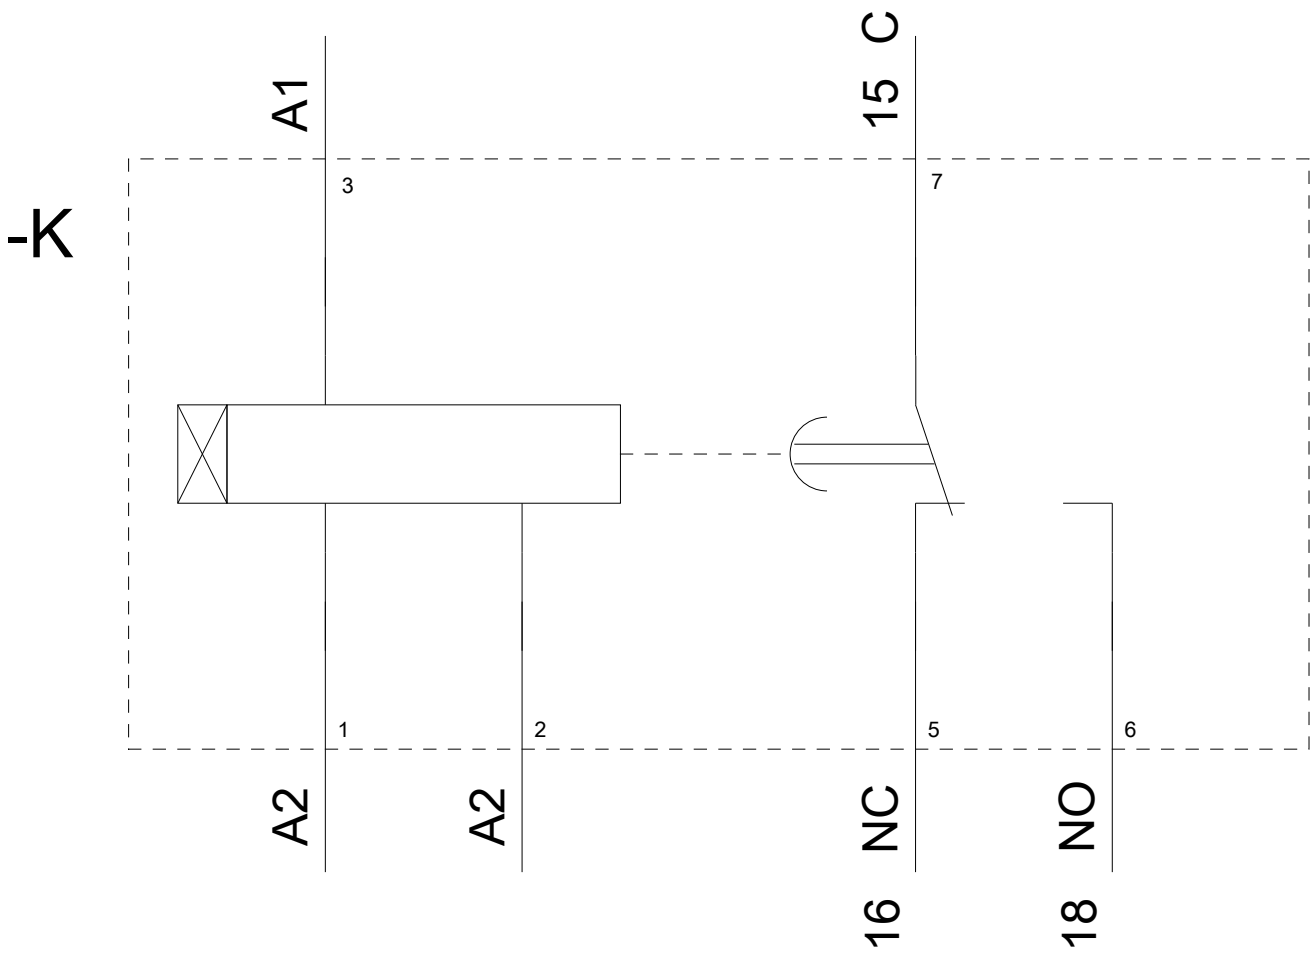

last modified:

07/20/2018