



COMPACT SWITCH 40MM WIDE WITH M12
CONNECTOR SNAP-ACTION CONTACTS 1NO+1NC
ROLLER PLUNGER

General technical details:		
Product designation		compact switch
Explosion protection category for dust		none
Insulation voltage		
• Rated value	V	400
Degree of pollution		3
Thermal current	A	10
Operating current		
• at AC-15		
• at 125 V / Rated value	A	6
• at 230 V / Rated value	A	3
• at DC-13		
• at 125 V / Rated value	A	0.55
• at 230 V / Rated value	A	0.27
Continuous current		
• of the slow DIAZED fuse link	A	10
• of the quick DIAZED fuse link	A	10
• of the C characteristic MCB	A	3
Mechanical service life (switching cycles)		
• typical		5,000,000

Electrical endurance (switching cycles)		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical		500,000
• at AC-15 / at 230 V / typical		100,000
Electrical operating cycles in one hour		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026		1,800
Repeat accuracy	mm	0.05
Circuit principle		snap-action contacts
Number of NC contacts		
• for auxiliary contacts		1
Design of the switching function		snap-action contact
Number of NO contacts		
• for auxiliary contacts		1
Vibration resistance		0.35 mm / 5g
Shock resistance		30g / 11 ms
Ambient temperature		
• during operation	°C	-25 ... +85
• during storage	°C	-25 ... +85
Width of the sensor	mm	40
Material		
• of the enclosure		metal
Material / of the enclosure / of the switch head		stainless steel
Design of the operating mechanism		roller plunger
Actuating speed	mm/s / m/s	0.05 ... 2
Minimum actuating force / in activation direction	N	15
Protection class IP		IP67
mounting position		any
Design of the electrical connection		M12 plug, fixed, 5-pole
Design of plug-in connection		M12 connector, 5-pole: pin 1= terminal BK, pin 2= BK/WH, pin 3= BU, pin 4= BN, pin 5= GN/YE
Reference code		
• acc. to DIN 40719 extended according to IEC 204-2		S
• acc. to DIN EN 61346-2		B

Certificates/approvals:

General Product Approval

Declaration of
Conformity

other



CCC



UL



EG-Konf.

[Confirmation](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5423-0CD20-1EB1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5423-0CD20-1EB1

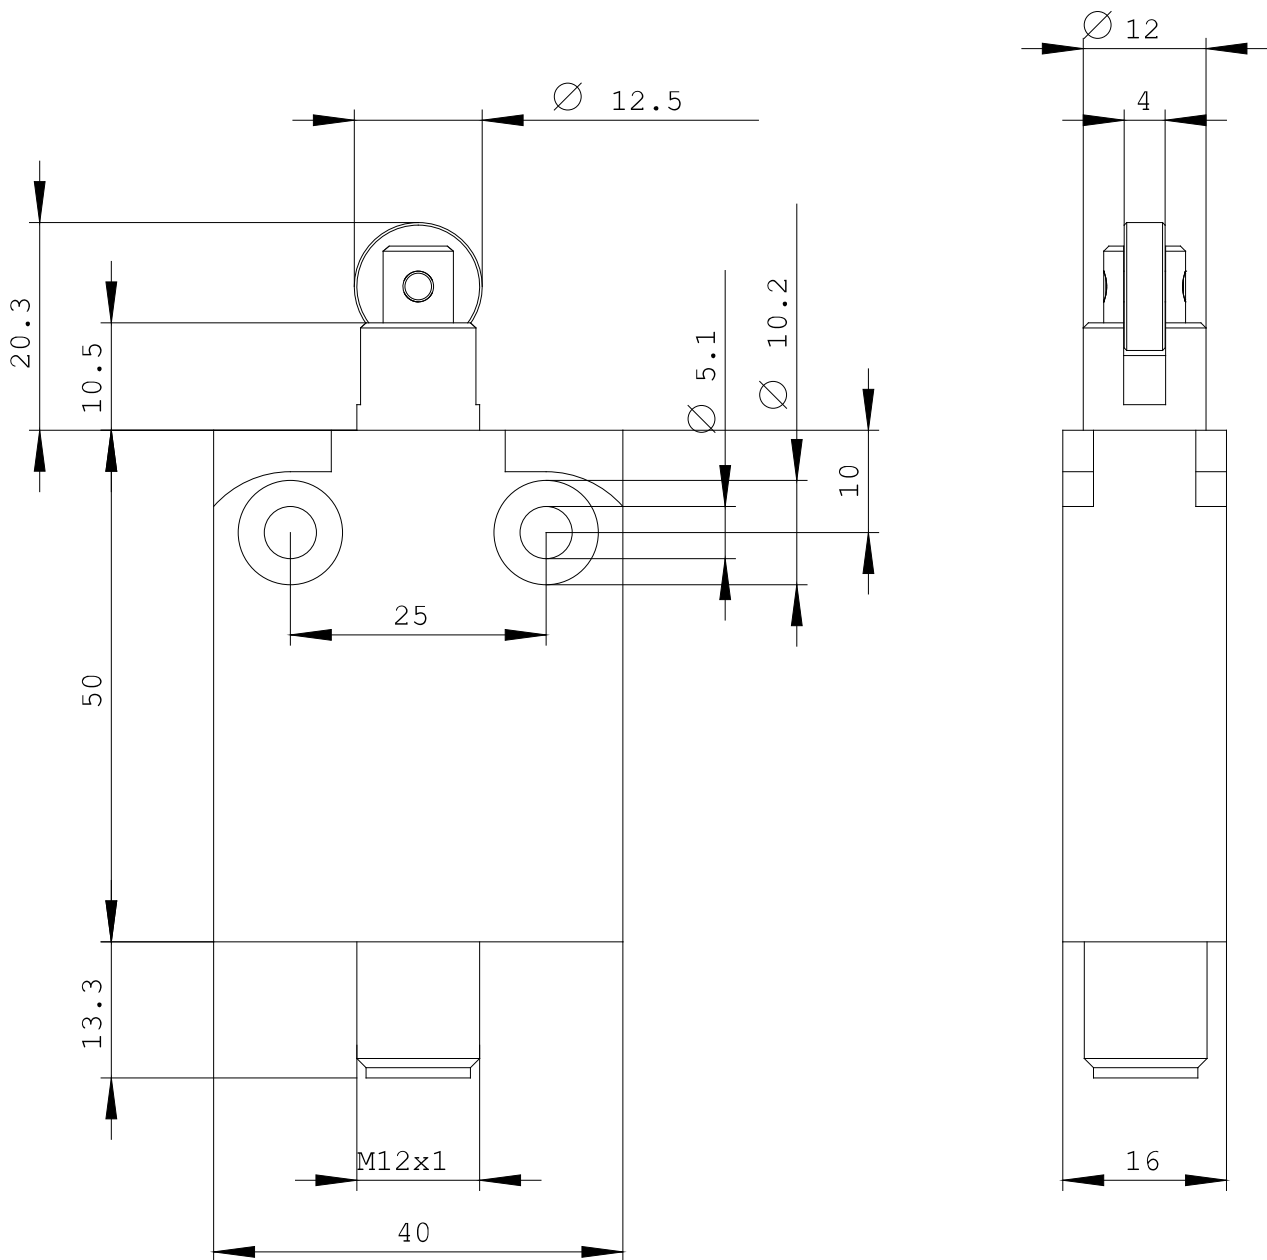

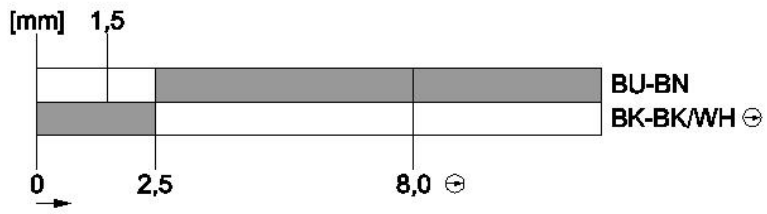

last change:

Nov 17, 2014