



AS-INTERFACE SLIMLINE MOD. S45,
DIGITAL, 4I/3O, 2/3-WIRE,
IP20 4 X 1 INPUT, 200MA,
PNP 3 X 1 OUTPUT, 1A,
DC 24V CAGE-CLAMP, MODULE WIDTH 45 MM

General technical data:

Design of the product		SlimLine S22.5 - I/O modules for operation in the control cabinet
Design of the slave type		A/B slave
Type		4 inputs / 3 outputs
I/O configuration		7
ID/ID2 code		A/0
Protocol / is supported / AS-interface protocol		Yes
AS interface / total current input / max	mA	270
operating voltage • according to AS-Interface spezifikation	V	26.5 ... 31.6
Addressing		front addressing socket
Design of the electrical connection / of the inputs and outputs		spring-loaded terminals
Reference code • acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750 • acc. to DIN EN 61346-2		A K
note		An external additional supply (AUX POWER) of 20 to 30 V DC is required for the supply of the output circuits. The additional supply must comply with VDE 0106 (PELV), protection class III.

Note 1		detachment tool for spring-loaded terminal connection: See Accessories
---------------	--	---------------------------------------------------------------------------

Sensor supply:		
Type of voltage supply / for power supply		using AS-Interface
Input voltage	V	20 ... 30
Property of the sensor supply / Short-circuit and overload resistant		Yes
Ampacity / of the sensor supply / for all inputs • at ambient temperature 40 °C	mA	200

Inputs:		
Number of digital inputs		4
Type of connection		2- and 3-wire technology
Input circuit		PNP transistor
Type of voltage / of the input voltages		DC
Inputs / switching level High / min	V	10
Input current / at digital input • for signal <1> / minimum • with signal <0> / maximum	mA mA	5 1.5
Inputs / sensor supply using AS-Interface		short-circuit and overload resistant

Outputs:		
Number of digital outputs		3
Type of voltage / of output voltages		DC
Output voltage / for DC • at 24 V	V	22 ... 24
Outputs / external power supply 24 V DC		using terminals: Terminal 13 = L+, Terminal 19 = M
Outputs • aggregate current / max	A	4
Ampacity • of the semiconductor output / at DC-13 / at 24 V	A	2
Type of switching output		solid state
Property of the output / Short-circuit proof		Yes
output / Polarity reversal protection		built-in
Outputs • short-circuit protection • induction protection • watchdog		built-in built-in built-in

Status display		
• display of I/Os		yellow LED

- AS-Interface
- FAULT

green LED
red LED

Assignment of data bits

- D0
- D1
- D2
- D3

IN1/OUT1
IN2 /OUT2
IN3/OUT3
IN4

Ambient conditions:

Ambient temperature

- during operation
- during storage

°C -25 ... +70
°C -40 ... +85

Protection class IP

IP20

Mechanical design:

Width

mm 45

Height

mm 108

Depth

mm 86

Mounting type

35 mm standard rail mounting or wall mounting using push-in lugs

Conductor cross-section

- solid
- finely stranded
 - with end sleeve
 - without end sleeve
- AWG / solid or stranded

2 x (0.25 - 1.5) mm²
2 x (0.25 - 1) mm²
2 x (0.25 - 1.5) mm²
AWG 2 x (24 - 16) mm²

Certificates/approvals:

AS-Interface certificate

yes (or requested for in case of new units)

Approvals

UL, CSA, shipbuilding (or requested for in case of new units)

General Product Approval



Shipping Approval



other

[Confirmation](#)

[Declaration of
Conformity](#)

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK2400-1FG00-0AA2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK2400-1FG00-0AA2

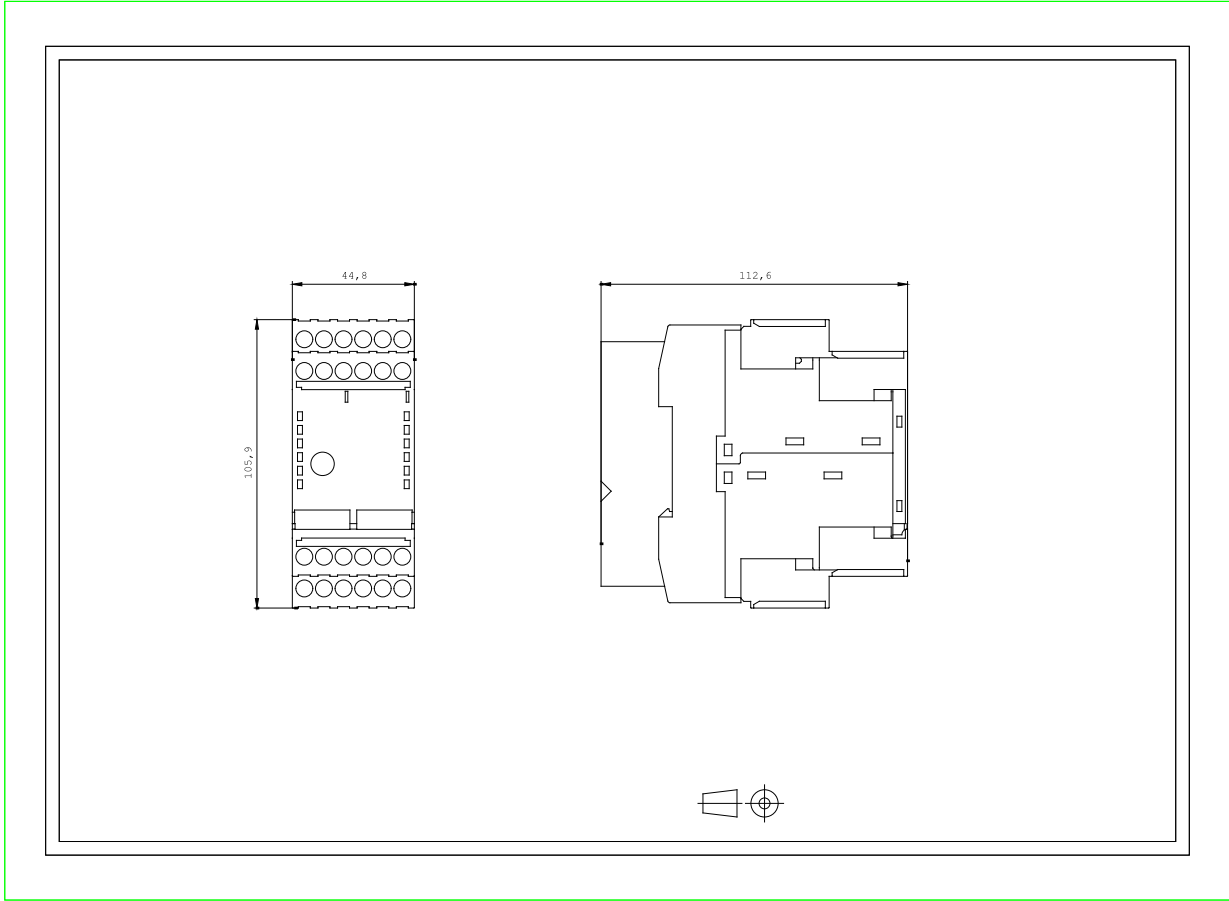

last change:

Dec 19, 2014