

RES.CURR. OP.CIRC. BR. SIQUENCE TYPE B SENS.
TO. UNIV. CURRENT 40A 3+N-POL IFN 300MA 400V
4MW SHORT-TIME DELAYED



Figure similar

Model		
product brand name		SENTRON
Product designation		RCCB
Design of the product		Short-time delayed
General technical data		
Number of poles		4
Size of installation devices / acc. to DIN 43880		1
Protection against electrical shock		Finger and back-of-hand safe
Short-circuit current rating	kA	10
circuit-breaker / Design		5SM3
Mechanical service life (switching cycles) / typical		10 000
Overvoltage category		III
Supply voltage		
Supply voltage		
• at AC / rated value	V	400
• for testing equipment / minimum	V	195
Supply voltage frequency		

• rated value		50Hz
Protection class		
Protection class IP		IP20, if the distribution board is installed, with connected conductors
Switching capacity		
Switching capacity current		
• acc. to EN 60898 / rated value	kA	0.8
Dissipation		
Power loss [W]		
• for rated value of the current / at AC / in hot operating state / per pole	W	1.1
• maximum	W	3.3
Electricity		
Tripping residual current / rated value	mA	300
rated current I _n / IEC, DIN/VDE / at 40 Cel	A	40
Type of fault current		B
Current / at AC / rated value	A	40
I²t-value / permissible	A ² ·s	70 000
Surge current resistance / rated value	kA	3
Operating frequency		50/60Hz
Product details		
Product feature		
• halogen-free		Yes
• silicon-free		Yes
Product extension / can be installed / supplementary devices		Yes
Number		
Number of test cycles / for environmental testing / acc. to IEC 60068-2-30		28
Connections		
Connectable conductor cross-section / stranded		
• minimum	mm ²	1.5
• maximum	mm ²	25
Connectable conductor cross-section / solid		
• minimum	mm ²	1.5
• maximum	mm ²	25
Tightening torque / with screw-type terminals		
• minimum	N·m	2.5
• maximum	N·m	3
Mechanical Design		

Height	mm	90
Width	mm	72
Depth	mm	77
Mounting position		any
Installation depth	mm	70
Number of width units		4
Mounting type		DIN rail (REG)
Net weight	g	543

Environmental conditions

Ambient temperature		
• minimum	°C	-25
• maximum	°C	45
• during storage / minimum permissible	°C	-40
• during storage / maximum permissible	°C	75

Certificates

Equipment marking		
• acc. to DIN EN 61346-2		F
• acc. to DIN EN 81346-2		F

General Product Approval	Declaration of Conformity	Test Certificates
---------------------------------	----------------------------------	--------------------------



[sonstig](#)



EG-Konf.

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SM3644-4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SM3644-4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM3644-4

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

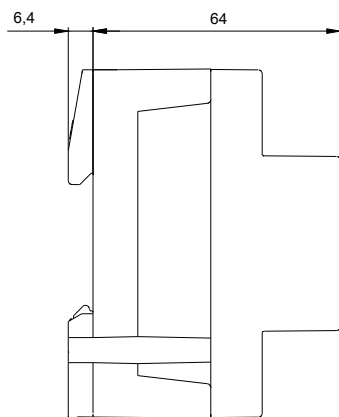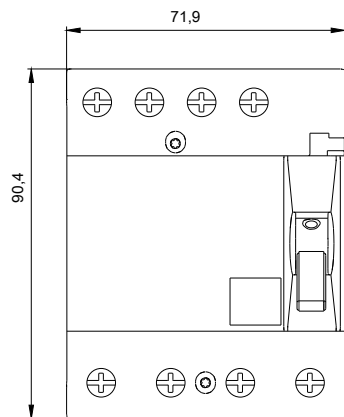

last modified:

07/13/2016